


# ST 1,5-TWIN BK

Order No.: 3037300

The illustration shows version ST 1,5-TWIN in gray

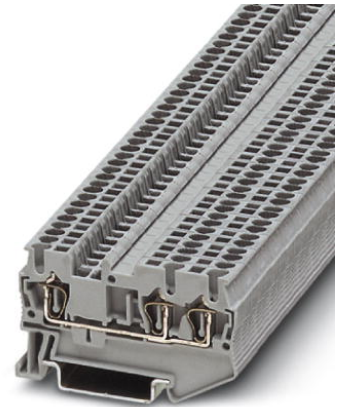

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3037300>

Feed-through modular terminal block, Type of connection: Spring-cage connection, Cross section: 0.08 mm<sup>2</sup> - 1.5 mm<sup>2</sup>, AWG 28 - 16, Width: 4.2 mm, Color: black, Mounting type: NS 35/7.5, NS 35/15

## Commercial data

|                          |                                                                                     |
|--------------------------|-------------------------------------------------------------------------------------|
| GTIN (EAN)               |  |
| sales group              | A630                                                                                |
| Pack                     | 50 pcs.                                                                             |
| Customs tariff           | 85369010                                                                            |
| Catalog page information | Page 82 (CL-2009)                                                                   |

## Product notes

WEEE/RoHS-compliant since: 01/01/2003



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

### General

|                       |       |
|-----------------------|-------|
| Number of levels      | 1     |
| Number of connections | 2     |
| Color                 | black |
| Insulating material   | PA    |

|                                    |    |
|------------------------------------|----|
| Inflammability class acc. to UL 94 | V0 |
|------------------------------------|----|

#### Dimensions

|                  |         |
|------------------|---------|
| Width            | 4.2 mm  |
| Length           | 60.5 mm |
| Height NS 35/7.5 | 36.5 mm |
| Height NS 35/15  | 44 mm   |

#### Technical data

|                                  |                                                                                                         |
|----------------------------------|---------------------------------------------------------------------------------------------------------|
| Maximum load current             | 17.5 A (with 1.5 mm <sup>2</sup> conductor cross section)                                               |
| Rated surge voltage              | 6 kV                                                                                                    |
| Pollution degree                 | 3                                                                                                       |
| Surge voltage category           | III                                                                                                     |
| Insulating material group        | I                                                                                                       |
| Connection in acc. with standard | IEC 60947-7-1                                                                                           |
| Nominal current I <sub>N</sub>   | 17.5 A (the maximum load current must not be exceeded by the total current of all connected conductors) |
| Nominal voltage U <sub>N</sub>   | 500 V                                                                                                   |
| Open side panel                  | ja                                                                                                      |

#### Connection data

|                                                                                         |                        |
|-----------------------------------------------------------------------------------------|------------------------|
| Conductor cross section solid min.                                                      | 0.08 mm <sup>2</sup>   |
| Conductor cross section solid max.                                                      | 1.5 mm <sup>2</sup>    |
| Conductor cross section stranded min.                                                   | 0.08 mm <sup>2</sup>   |
| Conductor cross section stranded max.                                                   | 1.5 mm <sup>2</sup>    |
| Conductor cross section AWG/kcmil min.                                                  | 28                     |
| Conductor cross section AWG/kcmil max                                                   | 16                     |
| Conductor cross section stranded, with ferrule without plastic sleeve min.              | 0.14 mm <sup>2</sup>   |
| Conductor cross section stranded, with ferrule without plastic sleeve max.              | 1.5 mm <sup>2</sup>    |
| Conductor cross section stranded, with ferrule with plastic sleeve min.                 | 0.14 mm <sup>2</sup>   |
| Conductor cross section stranded, with ferrule with plastic sleeve max.                 | 1.5 mm <sup>2</sup>    |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. | 0.5 mm <sup>2</sup>    |
| Type of connection                                                                      | Spring-cage connection |
| Stripping length                                                                        | 10 mm                  |

|                           |    |
|---------------------------|----|
| Internal cylindrical gage | A1 |
|---------------------------|----|

#### Certificates / Approvals



Certification

BV, CB, CSA, CUL, DNV, GL, GOST, KR, LR, NK, UL, VDE-PZI

Certification Ex:

IECEX, KEMA-EX

#### Accessories

| Item            | Designation                 | Description                                                                                                                                                                    |
|-----------------|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Assembly</b> |                             |                                                                                                                                                                                |
| 3030789         | ATP-ST-TWIN                 | Partition plate, Length: 76.6 mm, Width: 2 mm, Height: 45 mm, Color: gray                                                                                                      |
| 3022218         | CLIPFIX 35                  | Snap-on end bracket, for 35 mm NS 35/7.5 or NS 35/15 DIN rail, can be fitted with Zack strip ZB 8 and ZB 8/27, terminal strip marker KLM 2 and KLM, width: 9.5 mm, color: gray |
| 3030488         | D-ST 2,5-TWIN               | End cover, Length: 60.5 mm, Width: 2.2 mm, Height: 29 mm, Color: gray                                                                                                          |
| 3036602         | DS-ST 2,5                   | Cover segment, Length: 72 mm, Height: 36.5 mm, Color: gray                                                                                                                     |
| 1201442         | E/UK                        | End clamp, for assembly on NS 32 or NS 35/7.5 DIN rail                                                                                                                         |
| 0801762         | NS 35/ 7,5 CU UNPERF 2000MM | DIN rail, material: Copper, unperforated, height 7.5 mm, width 35 mm, length: 2 m                                                                                              |
| 0801733         | NS 35/ 7,5 PERF 2000MM      | DIN rail, material: Steel, galvanized and passivated with a thick layer, perforated, height 7.5 mm, width 35 mm, length: 2 m                                                   |
| 0801681         | NS 35/ 7,5 UNPERF 2000MM    | DIN rail, material: Steel, unperforated, height 7.5 mm, width 35 mm, length: 2 m                                                                                               |
| 1201756         | NS 35/15 AL UNPERF 2000MM   | DIN rail, deep-drawn, high profile, unperforated, 1.5 mm thick, material: Aluminum, height 15 mm, width 35 mm, length 2 m                                                      |
| 1201895         | NS 35/15 CU UNPERF 2000MM   | DIN rail, material: Copper, unperforated, 1.5 mm thick, height 15 mm, width 35 mm, length: 2 m                                                                                 |
| 1201730         | NS 35/15 PERF 2000MM        | DIN rail, material: Steel, perforated, height 15 mm, width 35 mm, length: 2 m                                                                                                  |
| 1201714         | NS 35/15 UNPERF 2000MM      | DIN rail, material: Steel, unperforated, height 15 mm, width 35 mm, length: 2 m                                                                                                |
| 1201798         | NS 35/15-2,3 UNPERF 2000MM  | DIN rail, material: Steel, unperforated, 2.3 mm thick, height 15 mm, width 35 mm, length: 2 m                                                                                  |

#### Bridges

|         |          |                                                     |
|---------|----------|-----------------------------------------------------|
| 3030116 | FBS 2-4  | Plug-in bridge, Number of positions: 2, Color: red  |
| 3030129 | FBS 3-4  | Plug-in bridge, Number of positions: 3, Color: red  |
| 3030132 | FBS 4-4  | Plug-in bridge, Number of positions: 4, Color: red  |
| 3030145 | FBS 5-4  | Plug-in bridge, Number of positions: 5, Color: red  |
| 3030158 | FBS 10-4 | Plug-in bridge, Number of positions: 10, Color: red |
| 3030352 | FBS 20-4 | Plug-in bridge, Number of positions: 20, Color: red |

#### Marking

|         |                         |                                                                                                                                                                                                    |
|---------|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1051993 | B-STIFT                 | Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm                                                                                        |
| 0811228 | X-PEN 0,35              | Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm                                                                            |
| 0805810 | ZB 4/WH-100:UNBEDRUCKT  | Zack strip, unprinted: 10-section, for individual labeling with M-PEN, ZB-T or CMS system, large batch, sufficient for labeling 1000 terminal blocks, for a terminal width of 4.2 mm, color: White |
| 0805823 | ZB 4:SO/CMS             | Zack strip, 10-section, divisible, special printing, marking according to customer requirements                                                                                                    |
| 0808613 | ZBF 4/WH-100:UNBEDRUCKT | Zack strip, flat, unprinted: 10-section, for individual labeling with M-PEN or ZBF-T, large batch, sufficient for labeling 1000 terminal blocks, color: white                                      |
| 0808639 | ZBF 4:SO/CMS            | Zack strip, flat, 10-section, divisible, special printing, marking according to customer requirements                                                                                              |

#### Plug/Adapter

|         |             |                                      |
|---------|-------------|--------------------------------------|
| 3206131 | ISH 1,5/0,2 | Insulation stop sleeve, Color: white |
| 3031034 | ISH 1,5/0,5 | Insulation stop sleeve, Color: gray  |
| 0201744 | MPS-MT      | Test plugs                           |
| 3030925 | PAI-4       | Test adapter, Color: gray            |
| 3030970 | PS-4        | Test adapter, Color: red             |
| 0201647 | RPS         | Reducing plug, Color: gray           |

#### Tools

|         |               |                                                                                                                                                      |
|---------|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1204504 | SZF 0-0,4X2,5 | Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.4 x 2.5 x 75 mm, 2-component grip, with non-slip grip |
|---------|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------|

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331