




PRODUCT SPECIFICATION

HDA800S-GHL

8", TFT SVGA (800X600) COLOR
LCD DISPLAY MODULE

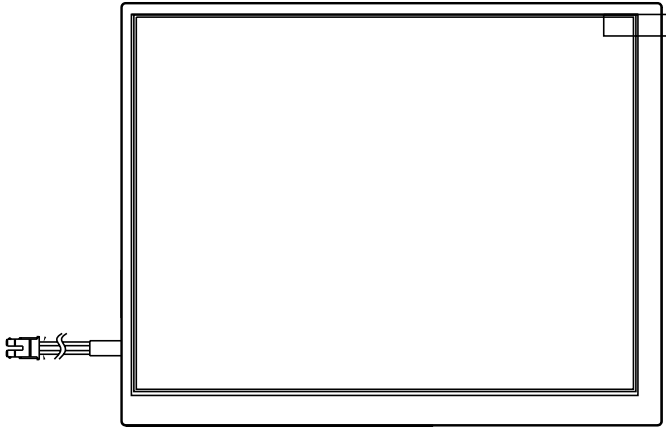

| | | | | |
|--|-------|-------|-------------|------------------|
| HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014 | Q.A.: | REV.: | HDA800S-GHL | SHEET 1 OF 17 |
| | Z.W. | 1.0 | | DATE: 9/16/10 |

1. General Description and Features

HDA800S-GHL is a transmissive type color active matrix TFT (Thin Film Transistor) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. This model is composed of a TFT-LCD module, a receiver circuit and a back-light unit. Graphics and texts can be displayed on a SVGA 800 (W) x RGB x 600 (H) dots (4:3 aspect ratio) with 262,144 colors.

1.1 Features

- Transmissive and back-light with 30 LEDs are available.
- TN (Twisted Nematic) mode.
- LVDS Receiver 6 bit Interface.
- High Brightness

1.2 LCD Module

| Item | Specification | Unit |
|--------------------|-----------------------------------|----------|
| Screen Size | 8.0 inches | Diagonal |
| Display Resolution | 800 (H) x 600 (V) | Pixel |
| Active Area | 162 (H) x 121.5 (V) | mm |
| Outline Dimension | 176.28 (H) x 138.2 (V) x 7.8 (T) | mm |
| Display Mode | Normally white mode/ Transmissive | -- |
| Pixel Arrangement | R,G,B Vertical Stripe | -- |
| Pixel Size | 0.2025 x 0.2025 | mm |
| Surface Treatment | Anti-Glare and Hard Coating(3H) | |
| Display Color | 262K | -- |
| Viewing Direction | 6 o'clock | -- |
| Input Interface | LVDS Receiver 6 bit Interface | -- |

2. Mechanical Information

| Item | Min. | Typ. | Max. | Unit | Note |
|-------------|----------------|------|--------|------|------|
| Module Size | Horizontal (H) | -- | 176.28 | -- | mm |
| | Vertical (V) | -- | 138.2 | -- | mm |
| | Thickness (T) | -- | 7.8 | -- | mm |
| Weight | -- | TBD | -- | g | -- |

Note (1) Not Include Component. Refer to the Outline Dimension Drawing as attached.

| | | | | |
|--|-------|-------|-------------|------------------|
| HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014 | Q.A.: | REV.: | HDA800S-GHL | SHEET 2 OF 17 |
| | Z.W. | 1.0 | | DATE: 9/16/10 |

3. Electrical Specifications

3.1 Absolute Max. Ratings

3.1.1 Absolute Ratings of Environment

If the operating condition exceeds the following absolute maximum ratings, the TFT LCD module may be damaged permanently.

($T_a=25\pm 2^\circ\text{C}$, $V_{SS}=\text{GND}=0$)

| Item | Symbol | Min. | Max. | Unit | Note |
|-----------------------|-----------|------|------|------------------|---------|
| Storage temperature | T_{STG} | -30 | 80 | $^\circ\text{C}$ | (1) |
| Operating temperature | T_{OPR} | -20 | 70 | $^\circ\text{C}$ | (1,2,3) |

Note (1) 95 % RH Max. ($40^\circ\text{C} \geq T_a$). Maximum wet-bulb temperature at 39°C or less. ($T_a > 40^\circ\text{C}$) No condensation.

Note (2) In case of below 0° , the response time of liquid crystal (LC) becomes slower and the color of panel becomes darker than normal one. Level of retardation depends on temperature, because of LC's character

Note (3) Only operation is guaranteed at operating temperature. Contrast, response time, another display quality are evaluated at $+25^\circ\text{C}$.

3.1.2 Electrical Absolute Maximum Ratings

3.1.2.1 TFT-LCD Module

($V_{SS}=\text{GND}=0$)

| Parameter | Symbol | Min. | Max. | Unit | Remark |
|----------------------|----------|------|--------------|------|--------|
| Power supply voltage | V_{CC} | -0.3 | 4.0 | V | |
| input voltage | V_I | -0.3 | $V_{CC}+0.3$ | V | -- |

3.1.2.2 Backlight Unit

($V_{SS}=\text{GND}=0$)

| Parameter | Symbol | Min. | Max. | Unit | Remark |
|---------------------------|--------|------|------|------|--------|
| Current of Backlight Unit | IB | -- | TBD | mA | |
| Voltage of Backlight Unit | VB | -- | TBD | V | |

3.1.3 DC Electrical Characteristics of the TFT LCD

(Ta=25±2°C, V_{SS}=GND=0)

| Item | Symbol | Min. | Typ. | Max. | Unit | Remark |
|-------------------------|-----------------------------------|------|-------|------|------|--------|
| Power supply | VCC | 3.0 | 3.3 | 3.6 | V | |
| Input Voltage for logic | Differential Input High Threshold | VTH | | +100 | mA | |
| | Differential Input Low Threshold | VTL | -100 | | mA | |
| Power Supply current | ICC | - | (220) | TBD | mA | Note 1 |

Note1: f_v =60Hz , Ta=25°C , Display pattern : Black pattern



3.2 AC Timing Characteristic of The LCD


3.2.1 Timing Condition

| Signal | Parameter | Symbol | Min. | Typ. | Max. | Unit. | Remark |
|--------|-----------------|-----------------------------|------|------|------|-------|--------|
| DCLK | CLK frequency | F _{clk} | - | 40 | 50 | MHz | |
| | CLK period | T _{cph} | 20 | - | - | ns | |
| | CLK pulse duty | T _{cwh} | 40 | 50 | 60 | % | |
| HSYNC | Horizontal Line | T _h | 862 | 1056 | 1200 | CLK | |
| | HS Display Area | T _{hd} | - | 800 | - | CLK | |
| | HS Pulse Width | T _{h_{pw}} | 1 | - | 40 | CLK | |
| | HS Back Porch | T _{hb} | - | 46 | - | CLK | |
| | HS Front Porch | T _{h_{fp}} | 16 | 210 | 354 | CLK | |
| VSYNC | VS Display Area | T _{vd} | - | 600 | - | th | |
| | VS Period Time | T _v | 624 | 635 | 700 | th | |
| | VS Pulse Width | T _{v_{pw}} | 1 | - | 20 | th | |
| | VS Back Porch | T _{vb} | - | 23 | - | th | |
| | VS Front Porch | T _{v_{fp}} | 1 | 12 | 77 | th | |


3.2.2 Timing Characteristic

3.2.2.1 Horizontal and Vertical input Timing

Horizontal input timing

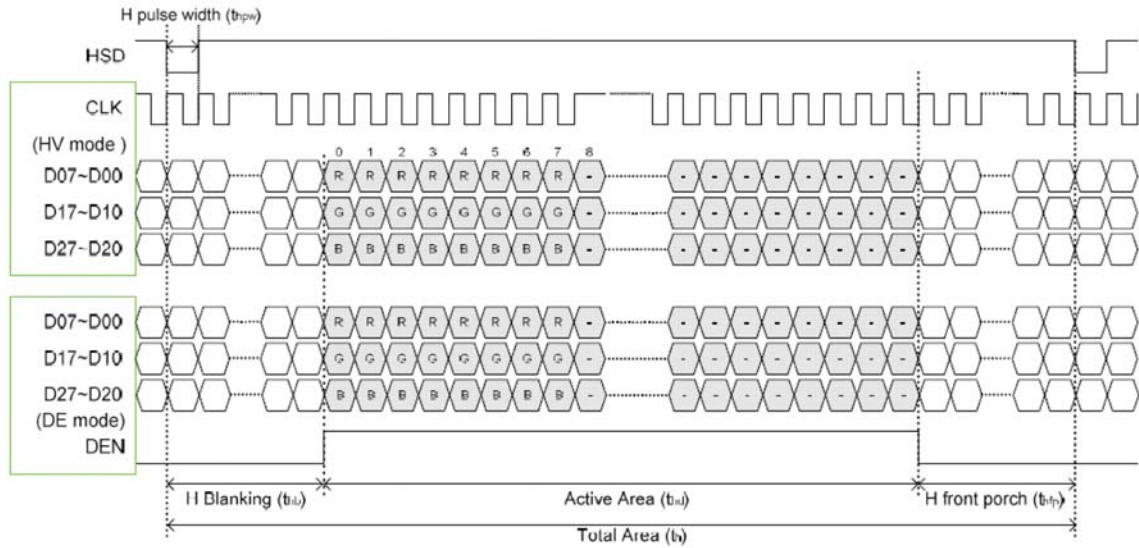


Vertical input timing

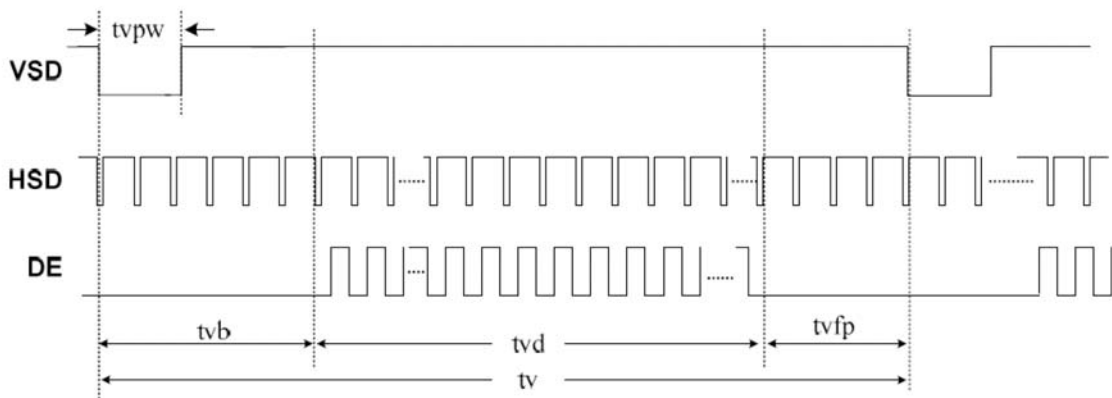

3.2.2.2 Clock and Data input waveforms

| Signal | Parameter | Symbol | Min. | Typ. | Max. | Unit. | Remark |
|--------|-----------------|-----------|------|------|------|-------|--------|
| HSYNC | HS setup time | T_{hst} | 8 | - | - | ns | |
| | HS hold time | T_{hhd} | 8 | - | - | ns | |
| VSYNC | VS setup time | T_{vst} | 8 | - | - | ns | |
| | VS hold time | T_{vhd} | 8 | - | - | ns | |
| Data | Data setup time | T_{dsu} | 8 | - | - | ns | |
| | Data hold time | T_{dhd} | 8 | - | - | ns | |
| DE | DEN setup time | T_{vpw} | 8 | - | - | ns | |
| | DEN hold time | T_{vb} | 8 | - | - | ns | |

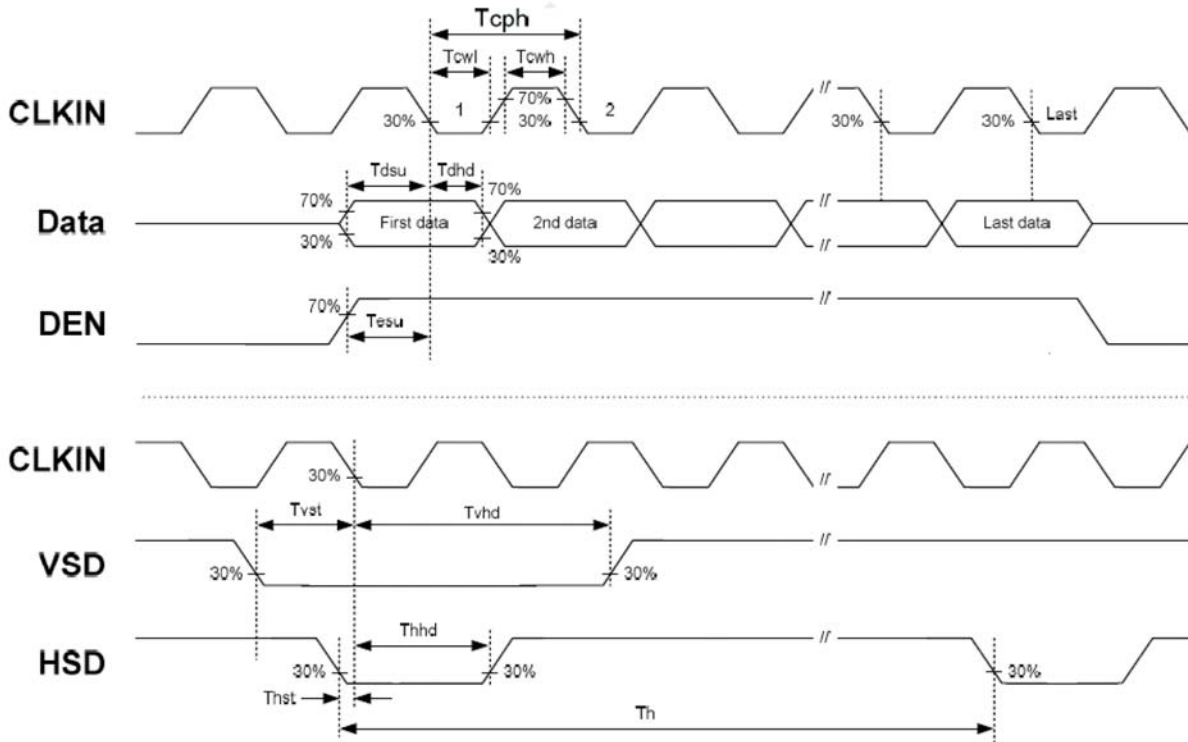


3.3 LVDS Switching Characteristics

3.3.1 LVDS Timing Condition

| Symbol | Parameter | Min. | Typ. | Max. | Unit. | Note |
|--------|------------------------------------|------------------|-------|----------|-------|------|
| tRCP | CLK OUT Period | VCC = 3.0 - 3.6V | 11.76 | T | 50.0 | ns |
| | | VCC = 2.5 - 3.6V | 14.28 | T | 50.0 | ns |
| tRCH | CLK OUT High Time | - | 4T/7 | - | ns | |
| tRCL | CLK OUT Low Time | - | 3T/7 | - | ns | |
| tRCD | RCLK +/- to CLK OUT Delay | - | 5T/7 | - | ns | |
| tRS | TTL Data Setup to CLK OUT | 0.35T-0.3 | - | - | ns | |
| tRH | TTL Data Hold from CLK OUT | 0.45T-1.6 | - | - | ns | |
| tTLH | TTL Low to High Transition Time | - | 2.0 | 3.0 | ns | |
| tTHL | TTL High to Low Transition Time | - | 1.8 | 3.0 | ns | |
| tRIP1 | Input Data Position0 (T = 11.76ns) | -0.4 | 0.0 | 0.4 | ns | |
| tRIP0 | Input Data Position1 (T = 11.76ns) | T/7-0.4 | T/7 | T/7+0.4 | ns | |
| tRIP6 | Input Data Position2 (T = 11.76ns) | 2T/7-0.4 | 2T/7 | 2T/7+0.4 | ns | |
| tRIP5 | Input Data Position3 (T = 11.76ns) | 3T/7-0.4 | 3T/7 | 3T/7+0.4 | ns | |
| tRIP4 | Input Data Position4 (T = 11.76ns) | 4T/7-0.4 | 4T/7 | 4T/7+0.4 | ns | |
| tRIP3 | Input Data Position5 (T = 11.76ns) | 5T/7-0.4 | 5T/7 | 5T/7+0.4 | ns | |
| tRIP2 | Input Data Position6 (T = 11.76ns) | 6T/7-0.4 | 6T/7 | 6T/7+0.4 | ns | |
| tRPLL | Phase Lock Loop Set | | | 10.0 | ms | |

3.3.2 LVDS AC Timing

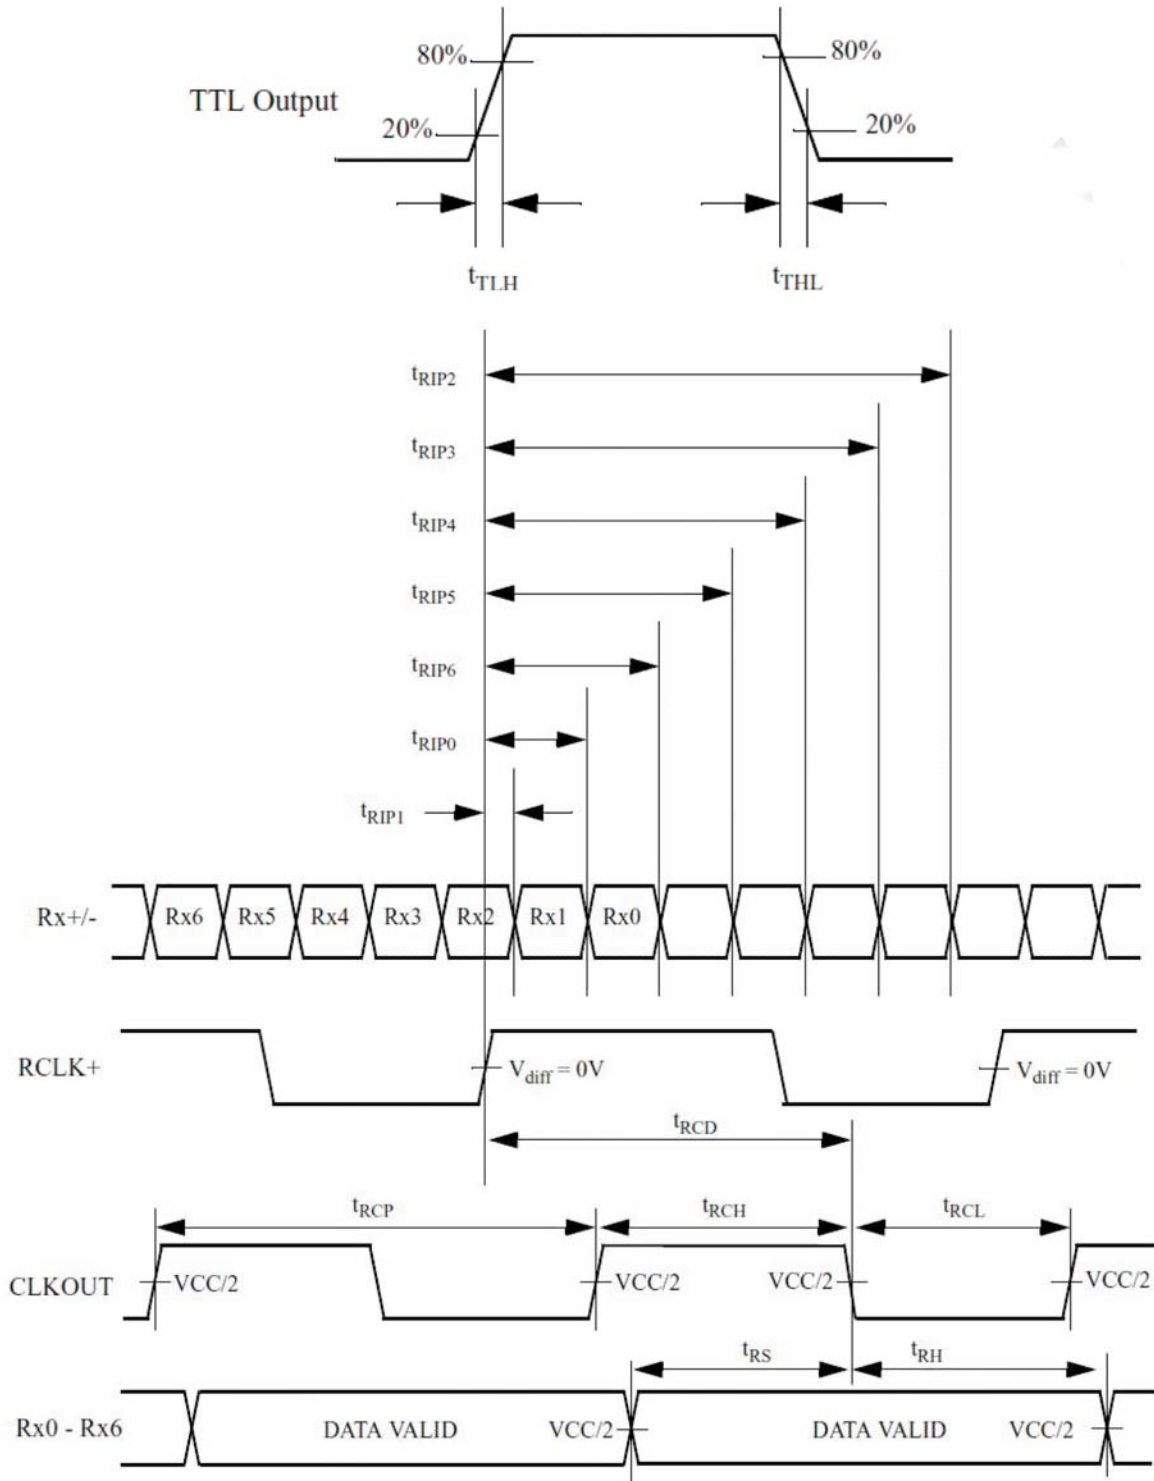

| | | | | |
|--|-------|-------|-------------|---------------|
| HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014 | Q.A.: | REV.: | HDA800S-GHL | SHEET 8 OF 17 |
| | Z.W. | 1.0 | | DATE: |

3.4 Back-Light Unit

The Back-light system is an edge-lighting type with 30 white LED (Light Emitting Diode)s. The characteristics of 30 white LEDs are shown in the following tables.

(Ta= Room Temp)

| Characteristics | Symbol | Min. | Typ. | Max. | Unit | Note |
|-------------------|-----------------|------|------|------|------|------|
| Forward Voltage | VB | (16) | (20) | (24) | V | |
| Forward Current | IB | - | 500 | - | mA | (1) |
| Power Consumption | P _{BL} | - | 10 | - | W | (2) |

Note (1) LEDs in 6 series x 5 parallel type.

(2) Where $IB = 500\text{mA}$, $VB = 20$, $P_{BL} = VB \times IB$

| | | | | |
|--|-------|-------|-------------|------------------|
| HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014 | Q.A.: | REV.: | HDA800S-GHL | SHEET 9 OF 17 |
| | Z.W. | 1.0 | | DATE: 9/16/10 |

4. Optical Characteristics

4.1 Optical characteristic of the LCD

The following items are measured under stable conditions. The optical characteristics should be measured in a dark room or equivalent state with the methods.

Measuring equipment: BM-7A


| Item | Symbol | Condition | Min | Type | Max | Unit | Note | |
|-------------------------------|----------------|----------------------------|------------------------------|---------|---------|-------------------|--------|-------|
| Brightness | B | | (1000) | (1300) | -- | cd/m ² | | |
| Response time | T _r | θ=0° | -- | 10 | -- | ms | | |
| | T _f | | -- | 15 | -- | ms | | |
| Contrast ratio | CR | At optimized viewing angle | (400) | (500) | -- | -- | | |
| Color Gamut | NTSC % | -- | -- | (50) | -- | % | | |
| Luminance Uniformity | ΔL | | 70 | 75 | | % | | |
| Color Chromaticity (CIE 1931) | White | W _x | θ=0° Normal Viewing Angle | (0.260) | (0.310) | (0.360) | -- | BM-7A |
| | | W _y | | (0.280) | (0.330) | (0.380) | | |
| Viewing Angle (6H) | Hor. | θ _R | CR≥10 | 60 | 70 | -- | Degree | |
| | | θ _L | | 60 | 70 | -- | | |
| | Ver. | θ _U | | 40 | 50 | -- | | |
| | | θ _D | | 60 | 75 | -- | | |

a. Test equipment setup

After stabilizing and leaving the panel alone shall be warmed up for the stable operation of LCM, the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. Optical specifications are measured by Topcon BM-7(fast) with a viewing angle of 2° at a distance of 50cm and normal direction.

b. Definition of response time: Tr and Tf

The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white".

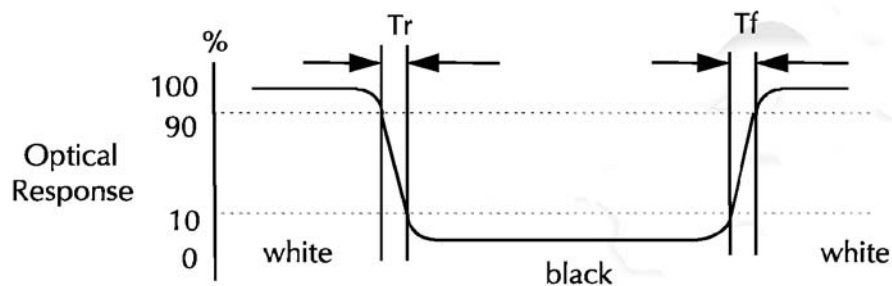


c. Definition of contrast ratio:

$$\text{Contrast Ratio (CR)} = \frac{\text{Brightness measured when LCD is at "white state"}}{\text{Brightness measured when LCD is at "black state"}}$$

d. Measured at the center area of the panel when all the input terminals of LCD panel are electrically opened.

| | | | | |
|--|-------|-------|-------------|------------------|
| HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014 | Q.A.: | REV.: | HDA800S-GHL | SHEET 11 OF 17 |
| | Z.W. | 1.0 | | DATE: 9/16/10 |

e. View Angle

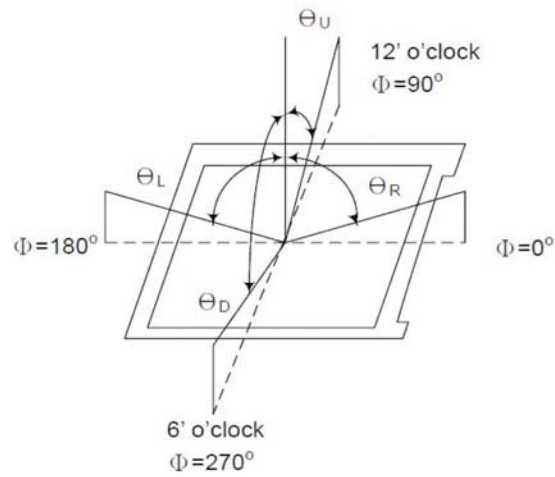

f. Definition of Luminance of White: Luminance of white at the center points

| | |
|---------------------------------|----------|
| Light Source of Back-Light Unit | LED Type |
|---------------------------------|----------|


g. Definition of White Uniformity

$$\text{White Uniformity} = \frac{\text{Min. luminance of white among 9-points}}{\text{Max. luminance of white among 9-points}} \times 100\%$$

h. The definition of Color Gamut -Color Chromaticity CIE 1931

Color coordinate of white & red, green, blue at center point.

$$\text{Color Gamut : NTSC(\%)} = (\text{RGB Triangle Area} / \text{NTSC Triangle Area}) \times 100$$

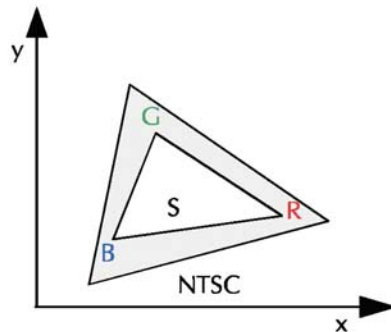

| | | | | |
|--|-------|-------|-------------|------------------|
| HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014 | Q.A.: | REV.: | HDA800S-GHL | SHEET 12 OF 17 |
| | Z.W. | 1.0 | | DATE: 9/16/10 |

5. I/O Terminal

5.1 Pin Assignment (connector part No: MSB24013P20A or equivalent.)

| Pin No. | Symbol | I/O | Function | Remark |
|---------|--------|-----|--|--------|
| 1 | VCC | P | Power Supply +3.3V | |
| 2 | VCC | P | Power Supply +3.3V | |
| 3 | GND | P | Ground | |
| 4 | GND | P | Ground | |
| 5 | RXIN0- | I | Negative LVDS differential data input | |
| 6 | RXIN0+ | I | Positive LVDS differential data input | |
| 7 | GND | P | Ground | |
| 8 | RXIN1- | I | Negative LVDS differential data input | |
| 9 | RXIN1+ | I | Positive LVDS differential data input | |
| 10 | GND | P | Ground | |
| 11 | RXIN2- | I | Negative LVDS differential data input | |
| 12 | RXIN2+ | I | Positive LVDS differential data input | |
| 13 | GND | P | Ground | |
| 14 | CLK- | I | Negative LVDS differential clock input | |
| 15 | CLK+ | I | Positive LVDS differential clock input | |
| 16 | GND | P | Ground | |
| 17 | NC | - | NO Connect | |
| 18 | NC | - | NO Connect | |
| 19 | GND | P | Ground | |
| 20 | GND | P | Ground | |

I: Input, P: Power

Notes:

- 1) NC Pin must be retained; this pin can't contact GND or other signal.
- 2) GND Pin must ground contact, can't be floating.

5.2 Back Light Unit (Connector Part No: JST:BHSR-02VS-01(N) or equivalent.)

| Pin No. | Symbol | Function | Remark |
|---------|--------|--------------------------------|--------|
| 1 | LEDA | Power Supply for LED backlight | PINK |
| 2 | LEDK | GND for LED backlight | WHITE |

HANTRONIX, INC.
10080 BUBB RD.
CUPERTINO, CA 95014


Q.A.:
Z.W.

REV.:
1.0

HDA800S-GHL

SHEET 13 OF 17
DATE: 9/16/10

5.3 Block Diagram

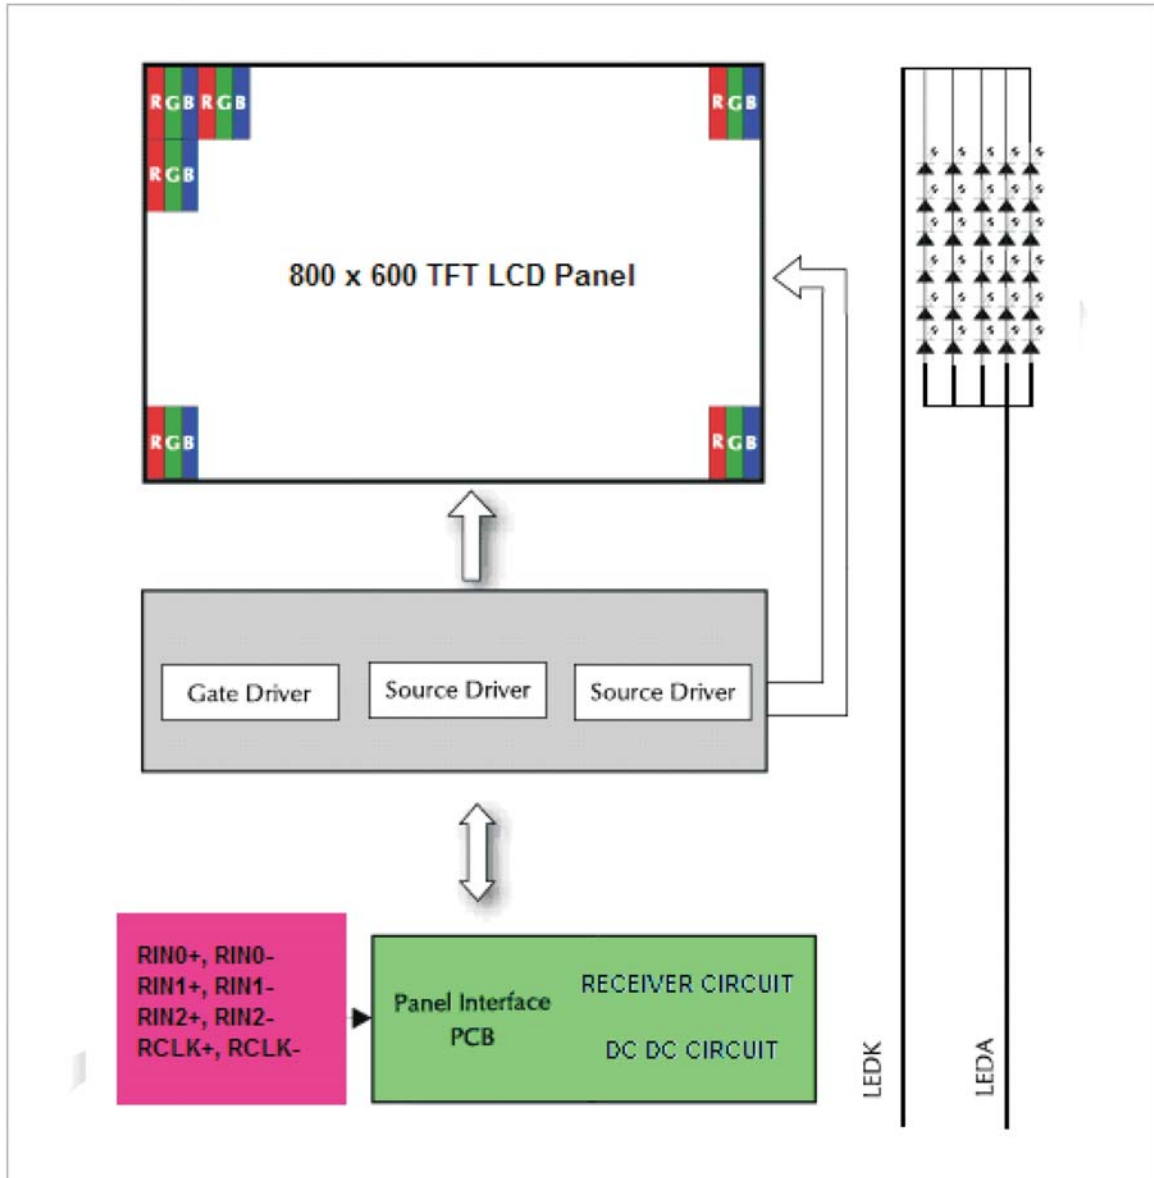

6. Displayed Color and Input Data

| | Color & Gray Scale | Data Signal | | | | | | | | | | | | | | | | | |
|-------------|--------------------|-------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| | | R5 | R4 | R3 | R2 | R1 | R0 | G5 | G4 | G3 | G2 | G1 | G0 | B5 | B4 | B3 | B2 | B1 | B0 |
| Basic Color | Black | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Red(0) | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Green(0) | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Blue(0) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 |
| | Cyan | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| | Magenta | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 |
| | Yellow | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| | White | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Red | Black | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Red(62) | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Red(61) | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : |
| | Red(31) | 0 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : |
| | Red(1) | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Red(0) | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| Green | Black | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Green(62) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Green(61) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : |
| | Green(31) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : |
| | Green(1) | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Green(0) | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | |
| Blue | Black | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Blue(62) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| | Blue(61) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : |
| | Blue(31) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : |
| | Blue(1) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 0 |
| Blue(0) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | |

0 : Low level voltage, 1 :High level voltage

Each basic color can be displayed in 64 gray scales from 6 bit data signals. With the combination of total 18 bit data signals, the 262,144-color display can be achieved on the screen.

7. Reliability Condition


No change on display and in operation under the following test condition.

Condition: Unless otherwise specified, tests will be conducted under the following condition.

Temperature: $20 \pm 5^\circ\text{C}$.

Humidity: $65 \pm 5\% \text{RH}$.


Tests will be not conducted under functioning state.
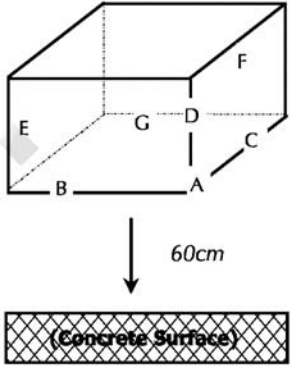
| No. | Parameter | Condition | Notes |
|-----|---|--|-------|
| 1 | High Temperature Operating | $70^\circ\text{C} \pm 2^\circ\text{C}$, 240hrs (Operation state). | |
| 2 | Low Temperature Operating | $-20^\circ\text{C} \pm 2^\circ\text{C}$, 240hrs (Operation state). | 1 |
| 3 | High Temperature Storage | $80^\circ\text{C} \pm 2^\circ\text{C}$, 240hrs. | 2 |
| 4 | Low Temperature Storage | $-30^\circ\text{C} \pm 2^\circ\text{C}$, 240hrs. | 1,2 |
| 5 | High Temperature and High Humidity Operation Test | $60^\circ\text{C} \pm 2^\circ\text{C}$, 90%, 240hrs. | 1,2 |
| 6 | Vibration Test | Total fixed amplitude: 1.5mm. Vibration Frequency: 10~55Hz. One cycle 60 seconds to 3 direction of X, Y, Z each 15 minutes. | 3 |
| 7. | Drop Test | To be measured after dropping from 60cm high on the concrete surface in packing state.  <i>Dropping method corner dropping:</i> <i>A corner: Once edge dropping.</i> <i>B, C, D edge: Once face dropping.</i> <i>E, F, G face: Once.</i> | |

- Notes:
1. No dew condensation to be observed.
 2. The function test shall be conducted after 4 hours storage at the normal temperature and humidity after removed from the test chamber.
 3. Vibration test will be conducted to the product itself without putting I in a container.

| | | | | |
|--|-------|-------|-------------|------------------|
| HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014 | Q.A.: | REV.: | HDA800S-GHL | SHEET 16 OF 17 |
| | Z.W. | 1.0 | | DATE: 9/16/10 |

8. Dimensional Outlines

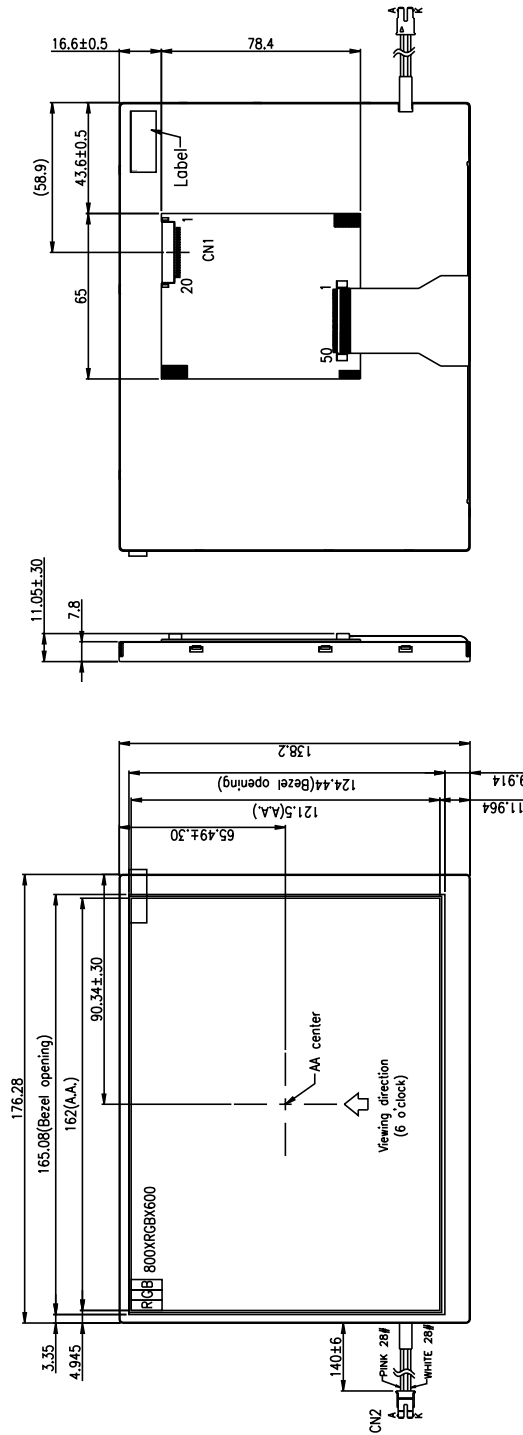

| No. | PIN NAME |
|-----|----------|
| 1 | VCC |
| 2 | VCC |
| 3 | GND |
| 4 | GND |
| 5 | RXIND- |
| 6 | RXIND+ |
| 7 | GND |
| 8 | RXINI- |
| 9 | RXINI+ |
| 10 | GND |
| 11 | RXINZ- |
| 12 | RXINZ+ |
| 13 | GND |
| 14 | CKIN- |
| 15 | CKIN+ |
| 16 | GND |
| 17 | NC |
| 18 | NC |
| 19 | GND |
| 20 | GND |

CN1 : MSB24013P20A
 CN2 : JST BHSR-02VS-1
 or compatible

| | | | | |
|--|-------|-------|--------------------|------------------|
| HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014 | Q.A.: | REV.: | HDA800S-GHL | SHEET 17 OF 17 |
| | Z.W. | 1.0 | | DATE: 9/16/10 |



Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331