




- | | | M | | 1EN329-R | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|---|--|----------------|-----------------|-------|---|---|--------------------|------------------|--------------------|------------------|--------------------|------------------|---|---|---|---|------------|---|---|---|----|---|--------------|---|---|---|----|--|
| SPECIFICATION DETAILS: | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| STANDARD: | | CONFORMS TO
MS24331-1 (MIL-PRF-8805/40), EXCEPT AS NOTED | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CONSTRUCTION: | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ENCLOSURE DESIGN | | WATERTIGHT SEAL PER MIL-PRF-8805, SYMBOL 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CONTACT MATERIAL & CONFIGURATION | | SMOOTH SILVER CONTACTS & SMOOTH GOLD CONTACT | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CIRCUIT CONFIGURATION | | 2 SPDT | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TERMINATION | | CONNECTOR PER MS27471Y9E35PN | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| WEIGHT | | .46 LB MAX | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| EXPOSED METALS | | CORROSION RESISTANT STAINLESS STEEL | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ELECTRICAL CHARACTERISTICS: | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ELECTRICAL RATINGS | | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">VOLTAGE</th> <th colspan="2" style="text-align: center;">RESISTIVE</th> <th colspan="2" style="text-align: center;">LOAD INDUCTIVE</th> <th style="text-align: center;">MOTOR</th> </tr> <tr> <th></th> <th style="text-align: center;">2</th> <th style="text-align: center;">1</th> <th style="text-align: center;">2</th> <th style="text-align: center;">1</th> <th style="text-align: center;">2</th> </tr> </thead> <tbody> <tr> <td>-SEA LEVEL</td> <td style="text-align: center;">4</td> <td style="text-align: center;">1</td> <td style="text-align: center;">2</td> <td style="text-align: center;">.5</td> <td style="text-align: center;">4</td> </tr> <tr> <td>-50,000 FEET</td> <td style="text-align: center;">4</td> <td style="text-align: center;">1</td> <td style="text-align: center;">2</td> <td style="text-align: center;">.5</td> <td></td> </tr> </tbody> </table> | | | | VOLTAGE | RESISTIVE | | LOAD INDUCTIVE | | MOTOR | | 2 | 1 | 2 | 1 | 2 | -SEA LEVEL | 4 | 1 | 2 | .5 | 4 | -50,000 FEET | 4 | 1 | 2 | .5 | |
| VOLTAGE | RESISTIVE | | LOAD INDUCTIVE | | MOTOR | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2 | 1 | 2 | 1 | 2 | | | | | | | | | | | | | | | | | | | | | | | | |
| -SEA LEVEL | 4 | 1 | 2 | .5 | 4 | | | | | | | | | | | | | | | | | | | | | | | | |
| -50,000 FEET | 4 | 1 | 2 | .5 | | | | | | | | | | | | | | | | | | | | | | | | | |
| DIELECTRIC STRENGTH & INSULATION RESISTANCE | | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">DIELECTRIC STRENGTH
≈ 60 Hz. FOR 5 SECONDS)
(MAX LEAKAGE)</th> <th style="text-align: left;">INSULATION RESISTANCE
(500 VDC ±10%)</th> </tr> </thead> <tbody> <tr> <td>1000 V Rms, 500μ A</td> <td>1000 Megohms MIN</td> </tr> <tr> <td>1000 V Rms, 500μ A</td> <td>1000 Megohms MIN</td> </tr> <tr> <td>1000 V Rms, 500μ A</td> <td>1000 Megohms MIN</td> </tr> </tbody> </table> | | | | DIELECTRIC STRENGTH
≈ 60 Hz. FOR 5 SECONDS)
(MAX LEAKAGE) | INSULATION RESISTANCE
(500 VDC ±10%) | 1000 V Rms, 500μ A | 1000 Megohms MIN | 1000 V Rms, 500μ A | 1000 Megohms MIN | 1000 V Rms, 500μ A | 1000 Megohms MIN | | | | | | | | | | | | | | | | |
| DIELECTRIC STRENGTH
≈ 60 Hz. FOR 5 SECONDS)
(MAX LEAKAGE) | INSULATION RESISTANCE
(500 VDC ±10%) | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1000 V Rms, 500μ A | 1000 Megohms MIN | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1000 V Rms, 500μ A | 1000 Megohms MIN | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1000 V Rms, 500μ A | 1000 Megohms MIN | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SWITCH RESISTANCE | | CIRCUIT 1-3 $\triangle 5$; CIRCUIT 4-6 N/A | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RECOMMENDATION OR USE IN APPLICATIONS LESS THAN .5
amps AND/OR 12 volts | | NO $\triangle 9$ CIRCUIT 4-6 YES $\triangle 9$ CIRCUIT 1-3 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MECHANICAL CHARACTERISTICS: | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CHARACTERISTICS: | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| OPERATING FORCE | | 6-12 LBS | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| FULL OVERTRAVEL FORCE | | 30 LB MAX | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RELEASE FORCE | | 4 LB MIN | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PRETRAVEL | | .040 MAX | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DIFFERENTIAL TRAVEL | | .020 MAX | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| OVERTRAVEL | | .250 MIN | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| COINCIDENCE OF OPERATING & RELEASE POINTS | | .010 OF PLUNGER TRAVEL | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MOUNTING STRENGTH | | 15 IN-LBS | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ACTUATOR STRENGTH | | 30 LBS APPLIED IN A DIRECTION TO CAUSE SWITCH ACTUATION | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LIFE: | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MECHANICAL LIFE | | 25,000 MIN. PER MIL-PRF-8805/40 $\triangle 6$ | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ELECTRICAL LIFE AT FULL RATED LOAD | | 25,000 MIN. PER MIL-PRF-8805/40 $\triangle 6$ | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ENVIRONMENTAL: | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TEMPERATURE RANGE | | -55 C TO +85 C | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ALTITUDE RANGE | | SEA LEVEL TO 50,000 FEET | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SHOCK | | PER MIL-PRF-8805 SYMBOL M - 100 g | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| VIBRATION | | PER MIL-PRF-8805 SYMBOL I - 10-500 Hz.& 10 g peak | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MOISTURE RESISTANCE | | PER MIL-PRF-8805 (10 DAY TEST) | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| THERMAL SHOCK | | PER MIL-PRF-8805 (5 CYCLE TEST) | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SALT SPRAY | | PER MIL-PRF-8805 (96 HOUR TEST) | | | | | | | | | | | | | | | | | | | | | | | | | | | |

ANSI Y14.5M-1982 APPLIES

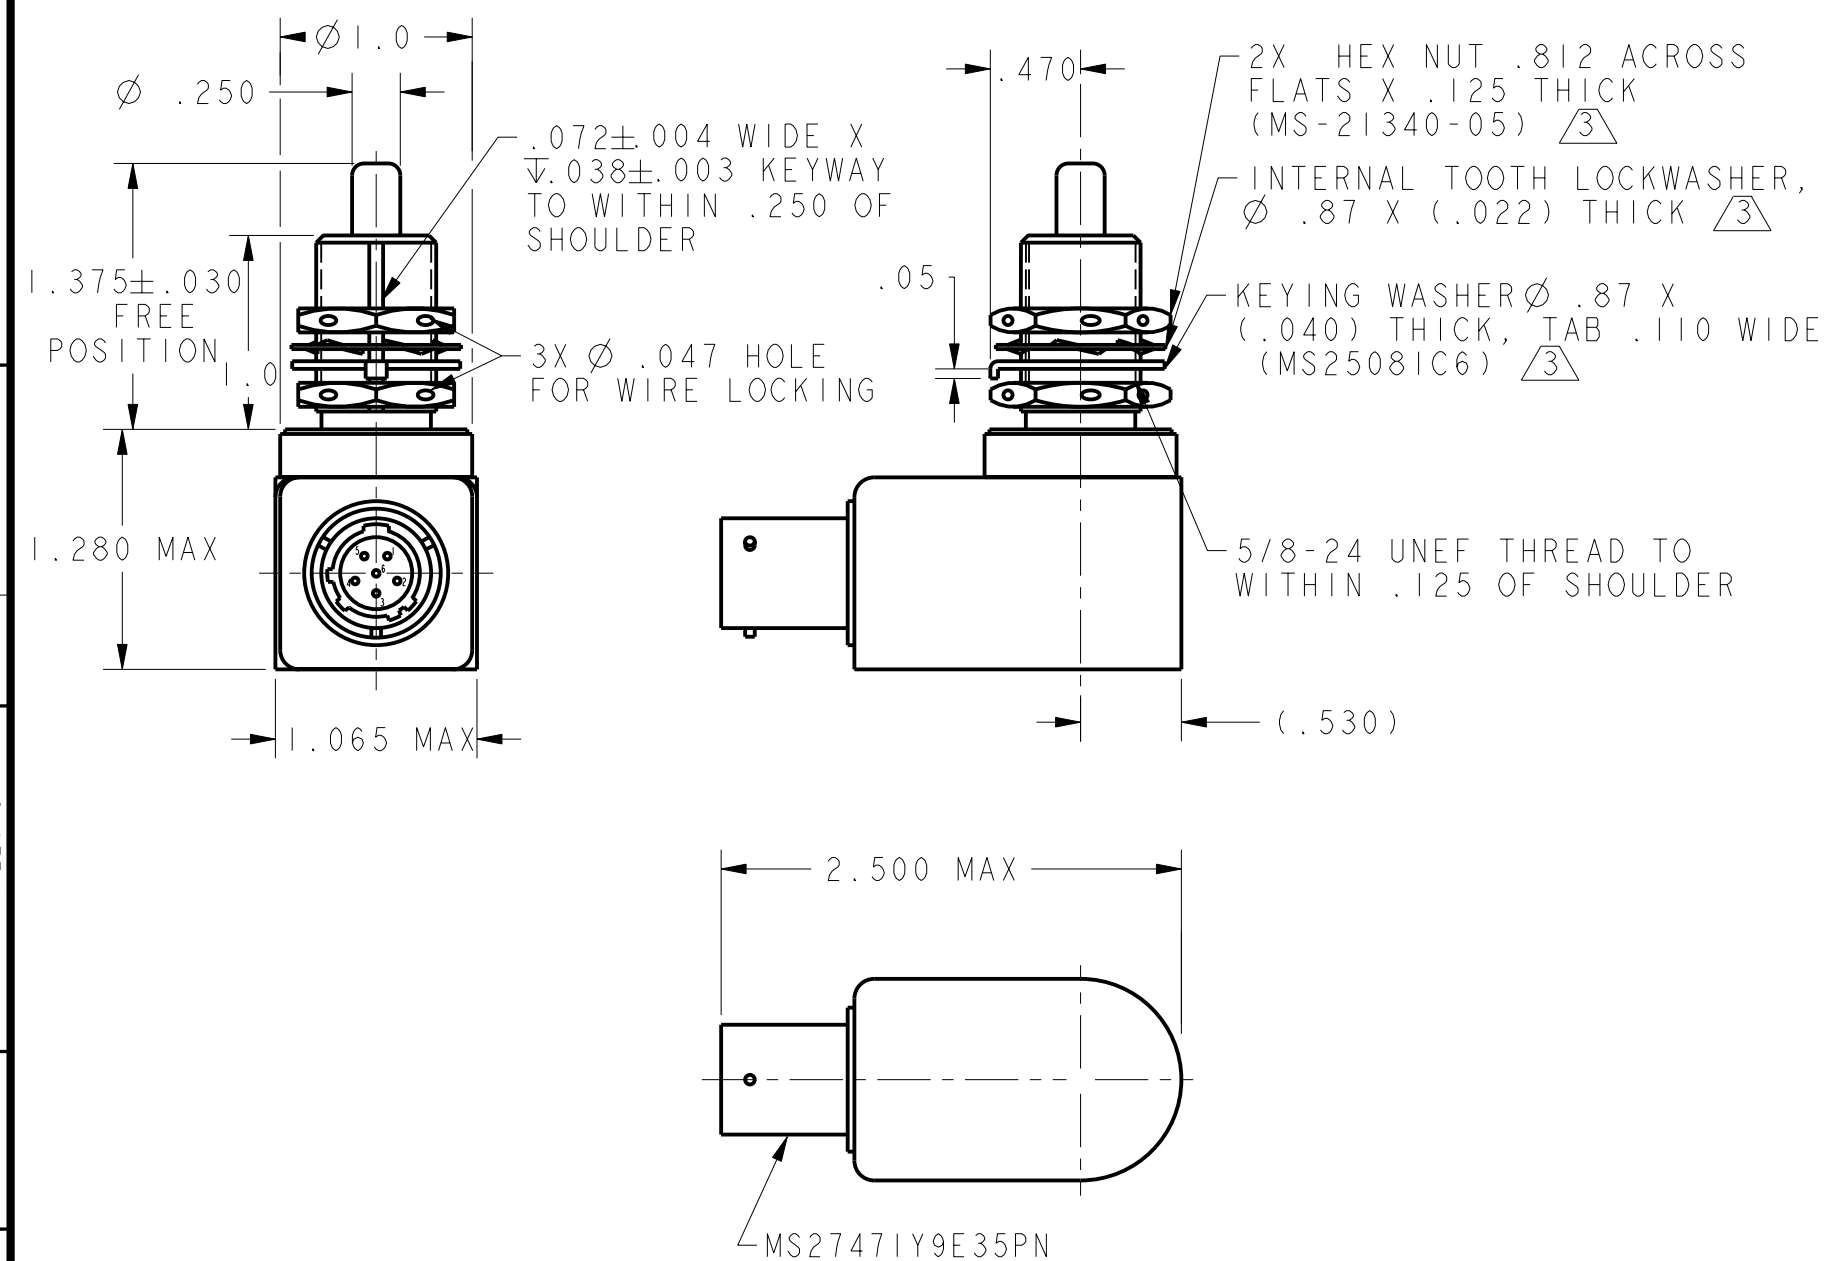

**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331