

# TCN PulseCap™ Series



## High Capacitance Tantalum Solid Electrolytic Chip Capacitors Undertab Series With Conductive Polymer Electrode



### FEATURES


- Large case size for maximum capacitance
- Conductive polymer electrode reduces ignition failure mode
- Low ESR
- Undertab terminations layout:
  - High Volumetric Efficiency
  - High PCB assembly density
  - High capacitance in smaller dimensions
- 3x reflow 260°C compatible
- 1 case size available

### APPLICATIONS

- Pulse energy battery support
- Power backup in SSDs



LEAD-FREE  
LEAD-FREE COMPATIBLE  
COMPONENT

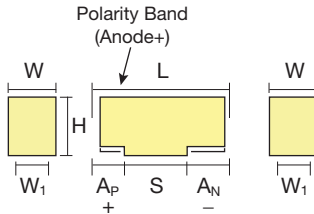


### CASE DIMENSIONS: millimeters (inches)

Code	EIA Code	EIA Metric	L+0.30 (0.012) -0.30 (0.012)	W+0.30 (0.012) -0.30 (0.012)	H max.	W <sub>1</sub> ±0.20 (0.008)	A <sub>p</sub> +0.30 (0.012) -0.20 (0.008)	A <sub>N</sub> +0.30 (0.012) -0.20 (0.008)
4	2924	7361-20	7.30 (0.287)	6.00 (0.240)	2.00 (0.079)	4.75 (0.187)	2.00 (0.079)	3.20 (0.126)

W1 dimension applies to the termination width for A dimensional area only.

### MARKING

#### 4 CASE

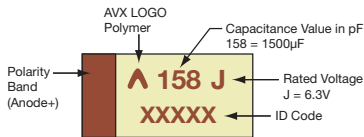

### HOW TO ORDER

**TCN**

Type

**4**

Case Size  
See table above

**158**

Capacitance Code  
pF code: 1st two digits represent significant figures, 3rd digit represents multiplier

**M**

Tolerance  
M = ±20%

**006**

Rated DC Voltage  
006 = 6.3Vdc  
016 = 16Vdc

**R**

Packaging  
R = Pure Tin 7" Reel

**0055**

ESR in mΩ

### TECHNICAL SPECIFICATIONS

Technical Data:	All technical data relate to an ambient temperature of +25°C			
Capacitance Range:	220 µF to 1500 µF			
Capacitance Tolerance:	±20%			
Leakage Current DCL:	0.1CV			
Rated Voltage (V <sub>R</sub> )	6.3	16	25	
Surge Voltage (V <sub>S</sub> )	8	21	33	
Temperature Range:	-55°C to +85°C			
Reliability:	1% per 1000 hours at 85°C, V <sub>R</sub> with 0.1Ω/V series impedance with 60% confidence level			

# TCN PulseCap™ Series



## High Capacitance Tantalum Solid Electrolytic Chip Capacitors Undertab Series With Conductive Polymer Electrode

### CAPACITANCE AND RATED VOLTAGE RANGE (FIGURE DENOTES CASE SIZE)

Capacitance		Voltage Rating DC (V <sub>R</sub> ) to 85°C		
µF	Code	6.3V (G)	16V (J)	25V (C)
100	107			3*
150	157			4(70)*
220	227		4(70)	
330	337		4(70)	
1000	108	3*/4(55)		
1500	158	4(55)		

Available Codes (ESR ratings in mOhms in brackets)

Engineering samples - please contact manufacturer

\*Codes under development – subject to change

Note: Voltage ratings are minimum values. AVX reserves the right to supply higher ratings in the same case size, to the same reliability standards.

### RATINGS & PART NUMBER REFERENCE

AVX Part No.	Case Size	Cap (µF)	Rated Voltage (V)	Rated Temp (°C)	Category Voltage (V)	Category Temp (°C)	DCL (µA) Max.	DF % Max.	ESR Max. (mΩ) @100kHz	MSL	100kHz Ripple Current (mA)			Product Category
											25°C	85°C	105°C	
<b>6.3 Volt @ 85°C</b>														
TCN4108M006#0055	4	1000	6.3	85	6.3	85	600	20	55	4	1860	1302	–	85°C
TCN4158M006#0055	4	1500	6.3	85	6.3	85	900	20	55	4	1860	1302	–	85°C
<b>16 Volt @ 85°C</b>														
TCN4227M016#0070	4	220	16	105	16	105	352	20	70	4	1650	1155	660	105°C
TCN4337M016#0070	4	330	16	85	16	85	528	20	70	4	1650	1155	–	85°C
<b>25 Volt @ 85°C</b>														
TCN4157M025#0070	4	150	25	85	25	85	375	20	70	4	1650	1155	–	85°C

Moisture Sensitivity Level (MSL) is defined according to J-STD-020.

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5 RMS with DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

ESR allowed to move up to 1.25 times catalogue limit post mounting

For typical weight and composition see page 214.

**NOTE: AVX reserves the right to supply a higher voltage rating in the same case size, to the same reliability standards.**

# TCN PulseCap™ Series



## High Capacitance Tantalum Solid Electrolytic Chip Capacitors Undertab Series With Conductive Polymer Electrode

### PRODUCT CATEGORY 105°C

TEST	105°C series (Temperature range -55°C to +105°C)									
	Condition			Characteristics						
Endurance	Determine after application of rated voltage for 2000 +48/-0 hours at 85±2°C and then leaving 1-2 hours at room temperature. Also determine after application of 105°C temperature, category voltage for 2000 +48/-0 hours and then leaving 1-2 hours at room temperature. Power supply impedance to be ≤0.1Ω/V.			Visual examination	no visible damage					
				DCL	1.25 x initial limit					
				ΔC/C	within +20/-30% of initial value					
				DF	1.5 x initial limit					
				ESR	2 x initial limit					
Storage Life	105°C, 0V, 2000h			Visual examination	no visible damage					
				DCL (V <sub>R</sub> ≤ 75V)	1.25 x initial limit					
				DCL (V <sub>R</sub> > 75V)	2 x initial limit					
				ΔC/C	within ±20% of initial value					
				DF	1.5 x initial limit					
				ESR	2 x initial limit					
Humidity	Determine after storage without applied voltage at 65±2°C and 95±2% relative humidity for 500 hours and then recovery 1-2 hours at room temperature.			Visual examination	no visible damage					
				DCL	3 x initial limit					
				ΔC/C	within +30/-20% of initial value					
				DF	1.5 x initial limit					
				ESR	2 x initial limit					
Temperature Stability	Step	Temperature°C	Duration(min)							
	1	+20±2	15							
	2	-55+0/-3	15							
	3	+20±2	15	DCL	+20°C	-55°C	+20°C	+85°C	+105°C	+20°C
	4	+85+3/-0	15	ΔC/C	n/a	+0/-20%	±5%	+20/-0%	+30/-0%	±5%
	5	+105+3/-0	15	DF	IL*	1.5 x IL*	IL*	1.5 x IL*	2 x IL*	IL*
	6	+20±2	15							
Surge Voltage	Test temperature: 105°C+3/0°C Test voltage: Category voltage at 105°C Surge voltage: 1.3 x category voltage at 105°C Series protection resistance 1000±100Ω Discharge resistance: 1000Ω Number of cycles: 1000x Cycle duration: 6 min; 30 sec charge, 5 min 30 sec discharge			Visual examination	no visible damage					
				DCL	initial limit					
				ΔC/C	within +20/-30% of initial value					
				DF	1.25 x initial limit					

\*Initial Limit

### PRODUCT CATEGORY 85°C

TEST	85°C series (Temperature range -55°C to +85°C)								
	Condition			Characteristics					
Endurance	Determine after application of rated voltage for 2000 +48/-0 hours at 85±2°C and then leaving 1-2 hours at room temperature. Power supply impedance to be ≤0.1Ω/V.			Visual examination	no visible damage				
				DCL	1.25 x initial limit				
				ΔC/C	within +20/-30% of initial value				
				DF	1.5 x initial limit				
				ESR	2 x initial limit				
Storage Life	85°C, 0V, 2000 <sub>h</sub>			Visual examination	no visible damage				
				DCL	1.25 x initial limit				
				ΔC/C	within ±20% of initial value				
				DF	1.5 x initial limit				
				ESR	2 x initial limit				
Humidity	Determine after storage without applied voltage at 65±2°C and 95±2% relative humidity for 500 hours and then recovery 1-2 hours at room temperature.			Visual examination	no visible damage				
				DCL	5 x initial limit				
				ΔC/C	within +40/-20% of initial value				
				DF	1.5 x initial limit				
				ESR	2 x initial limit				
Temperature Stability	Step	Temperature°C	Duration(min)						
	1	+20±2	15						
	2	-55+0/-3	15						
	3	+20±2	15	DCL	+20°C	-55°C	+20°C	+85°C	+20°C
	4	+85+3/-0	15	ΔC/C	n/a	+0/-20%	±5%	+20/-0%	±5%
	5	+20±2	15	DF	IL*	1.5 x IL*	IL*	1.5 x IL*	IL*
Surge Voltage	Test temperature: 85+3/0°C Test voltage: Rated voltage Surge voltage: 1.3 x rated voltage Series protection resistance 1000±100Ω. Discharge resistance: 1000Ω Number of cycles: 1000x Cycle duration: 6 min; 30 sec charge, 5 min 30 sec discharge			Visual examination	no visible damage				
				DCL	initial limit				
				ΔC/C	within +20/-30% of initial value				
				DF	1.25 x initial limit				

\*Initial Limit





## Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

### Наши контакты:

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331