Bulletin I25155 rev. C 04/00

International
IOR Rectifier

ST330C..C SERIES

PHASE CONTROL THYRISTORS **Hockey Puk Version**

720A

Features

- Center amplifying gate
- Metal case with ceramic insulator
- International standard case TO-200AB (E-PUK)

case style TO-200AB (E-PUK)

Typical Applications

- DC motor controls
- Controlled DC power supplies
- AC controllers

Major Ratings and Characteristics

Parameters		ST330C..C	Units
$I_{T(AV)}$		720	A
	@ T_{hs}	55	°C
$I_{T(RMS)}$		1420	A
	@ T_{hs}	25	°C
I_{TSM}	@ 50Hz	9000	A
	@ 60Hz	9420	A
I^2t	@ 50Hz	405	KA^2s
	@ 60Hz	370	KA^2s
V_{DRM}/V_{RRM}		400 to 1600	V
t_q	typical	100	µs
T_J		- 40 to 125	°C

ELECTRICAL SPECIFICATIONS

Voltage Ratings

Type number	Voltage Code	V_{DRM}/V_{RRM}, max. repetitive peak and off-state voltage V	V_{RSM}, maximum non-repetitive peak voltage V	I_{DRM}/I_{RRM} max. @ $T_J = T_J$ max mA
ST330C..C	04	400	500	50
	08	800	900	
	12	1200	1300	
	14	1400	1500	
	16	1600	1700	

On-state Conduction

Parameter		ST330C..C	Units	Conditions		
$I_{T(AV)}$	Max. average on-state current	720 (350)	A	180° conduction, half sine wave		
	@ Heatsink temperature	55 (75)	°C	double side (single side) cooled		
$I_{T(RMS)}$	Max. RMS on-state current	1420	A	DC @ 25°C heatsink temperature double side cooled		
I_{TSM}	Max. peak, one-cycle non-repetitive surge current	9000	A	t = 10ms	No voltage reapplied	Sinusoidal half wave, Initial $T_J = T_J$ max.
		9420		t = 8.3ms		
		7570		t = 10ms	100% V_{RRM} reapplied	
		7920		t = 8.3ms		
I^2t	Maximum I^2t for fusing	405	KA^2s	t = 10ms	No voltage reapplied	
		370		t = 8.3ms		
		287		t = 10ms	100% V_{RRM} reapplied	
		262		t = 8.3ms		
$I^2\sqrt{t}$	Maximum $I^2\sqrt{t}$ for fusing	4050	$KA^2\sqrt{s}$	t = 0.1 to 10ms, no voltage reapplied		
$V_{T(TO)1}$	Low level value of threshold voltage	0.91	V	(16.7% x π x $I_{T(AV)}$ < I < π x $I_{T(AV)}$), $T_J = T_J$ max.		
$V_{T(TO)2}$	High level value of threshold voltage	0.92		(I > π x $I_{T(AV)}$), $T_J = T_J$ max.		
r_{t1}	Low level value of on-state slope resistance	0.58	mΩ	(16.7% x π x $I_{T(AV)}$ < I < π x $I_{T(AV)}$), $T_J = T_J$ max.		
r_{t2}	High level value of on-state slope resistance	0.57		(I > π x $I_{T(AV)}$), $T_J = T_J$ max.		
V_{TM}	Max. on-state voltage	1.96	V	I_{pk}= 1810A, $T_J = T_J$ max, t_p = 10ms sine pulse		
I_H	Maximum holding current	600	mA	T_J = 25°C, anode supply 12V resistive load		
I_L	Typical latching current	1000				

Switching

Parameter		ST330C..C	Units	Conditions
di/dt	Max. non-repetitive rate of rise of turned-on current	1000	A/µs	Gate drive 20V, 20Ω, $t_r \leq$ 1µs $T_J = T_J$ max, anode voltage ≤ 80% V_{DRM}
t_d	Typical delay time	1.0	µs	Gate current 1A, di_g/dt = 1A/µs V_d = 0.67% V_{DRM}, T_J = 25°C
t_q	Typical turn-off time	100		I_{TM} = 550A, $T_J = T_J$ max, di/dt = 40A/µs, V_R= 50V dv/dt = 20V/µs, Gate 0V 100Ω, t_p = 500µs

Blocking

	Parameter	ST330C..C	Units	Conditions
dv/dt	Maximum critical rate of rise of off-state voltage	500	V/µs	$T_J = T_J$ max. linear to 80% rated V_{DRM}
I_{RRM} I_{DRM}	Max. peak reverse and off-state leakage current	50	mA	$T_J = T_J$ max, rated V_{DRM}/V_{RRM} applied

Triggering

	Parameter	ST330C..C		Units	Conditions	
P_{GM}	Maximum peak gate power	10.0		W	$T_J = T_J$ max, $t_p \leq 5$ms	
$P_{G(AV)}$	Maximum average gate power	2.0			$T_J = T_J$ max, f = 50Hz, d% = 50	
I_{GM}	Max. peak positive gate current	3.0		A	$T_J = T_J$ max, $t_p \leq 5$ms	
$+V_{GM}$	Maximum peak positive gate voltage	20		V	$T_J = T_J$ max, $t_p \leq 5$ms	
$-V_{GM}$	Maximum peak negative gate voltage	5.0				
		TYP.	MAX.			
I_{GT}	DC gate current required to trigger	200	-	mA	T_J = - 40°C	Max. required gate trigger/ current/ voltage are the lowest value which will trigger all units 12V anode-to-cathode applied
		100	200		T_J = 25°C	
		50	-		T_J = 125°C	
V_{GT}	DC gate voltage required to trigger	2.5	-	V	T_J = - 40°C	
		1.8	3.0		T_J = 25°C	
		1.1	-		T_J = 125°C	
I_{GD}	DC gate current not to trigger	10		mA	$T_J = T_J$ max	Max. gate current/voltage not to trigger is the max. value which will not trigger any unit with rated V_{DRM} anode-to-cathode applied
V_{GD}	DC gate voltage not to trigger	0.25		V		

Thermal and Mechanical Specification

	Parameter	ST330C..C	Units	Conditions
T_J	Max. operating temperature range	-40 to 125	°C	
T_{stg}	Max. storage temperature range	-40 to 150		
R_{thJ-hs}	Max. thermal resistance, junction to heatsink	0.09	K/W	DC operation single side cooled
		0.04		DC operation double side cooled
R_{thC-hs}	Max. thermal resistance, case to heatsink	0.02	K/W	DC operation single side cooled
		0.01		DC operation double side cooled
F	Mounting force, ± 10%	9800	N	
		(1000)	(Kg)	
wt	Approximate weight	83	g	
	Case style	TO - 200AB (E-PUK)		See Outline Table

$\Delta R_{thJ\text{-}hs}$ Conduction

(The following table shows the increment of thermal resistence $R_{thJ\text{-}hs}$ when devices operate at different conduction angles than DC)

Conduction angle	Sinusoidal conduction		Rectangular conduction		Units	Conditions
	Single Side	Double Side	Single Side	Double Side		
180°	0.012	0.011	0.008	0.007	K/W	$T_J = T_J$ max.
120°	0.014	0.012	0.014	0.013		
90°	0.017	0.015	0.019	0.017		
60°	0.025	0.022	0.026	0.023		
30°	0.043	0.036	0.043	0.037		

Ordering Information Table

Device Code

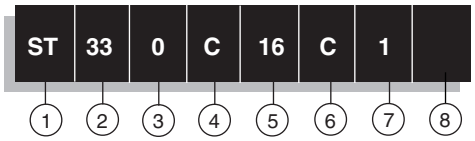

1 - Thyristor
2 - Essential part number
3 - 0 = Converter grade
4 - C = Ceramic Puk
5 - Voltage code: Code x 100 = V_{RRM} (See Voltage Rating Table)
6 - C = Puk Case TO-200AB (E-PUK)
7 - 0 = Eyelet terminals (Gate and Auxiliary Cathode Unsoldered Leads)
1 = Fast-on terminals (Gate and Auxiliary Cathode Unsoldered Leads)
2 = Eyelet terminals (Gate and Auxiliary Cathode Soldered Leads)
3 = Fast-on terminals (Gate and Auxiliary Cathode Soldered Leads)
8 - Critical dv/dt: None = 500V/µsec (Standard selection)
L = 1000V/µsec (Special selection)

Outline Table

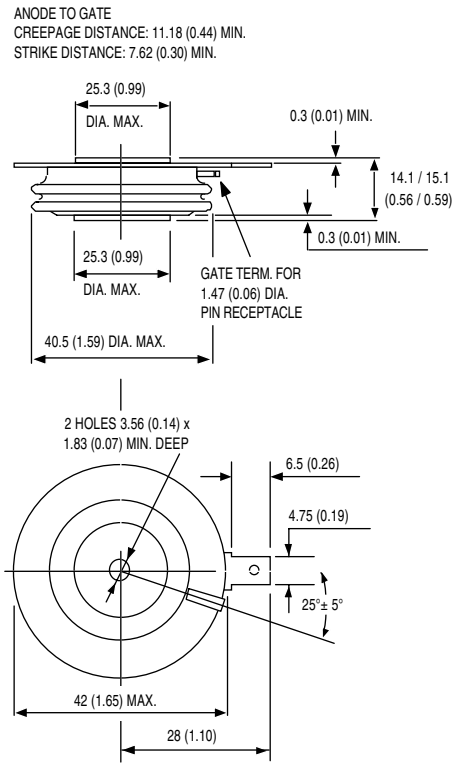

Case Style TO-200AB (E-PUK)

All dimensions in millimeters (inches)

Quote between upper and lower pole pieces has to be considered after application of Mounting Force (see Thermal and Mechanical Specification)

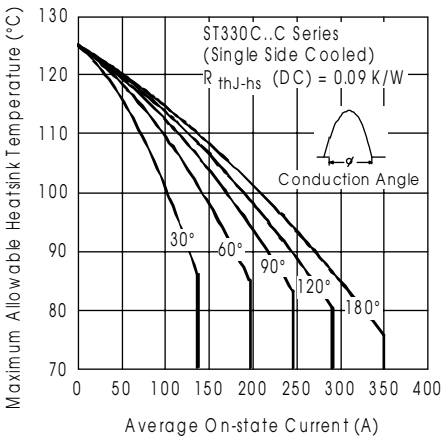

Fig. 1 - Current Ratings Characteristics

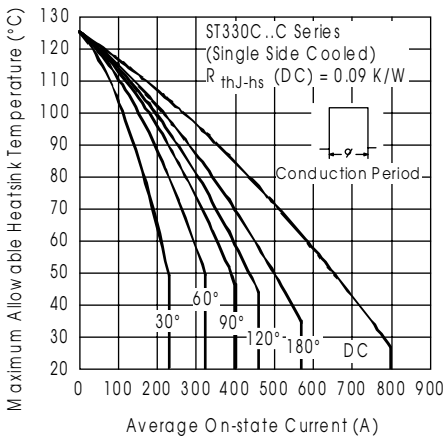

Fig. 2 - Current Ratings Characteristics

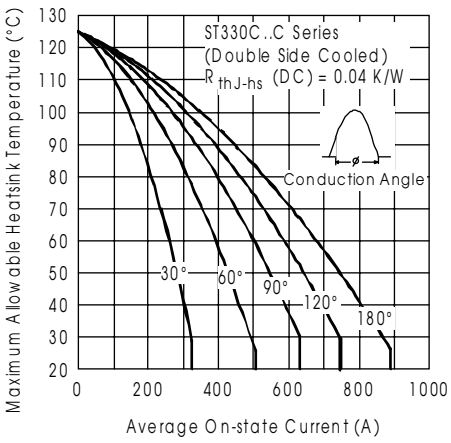

Fig. 3 - Current Ratings Characteristics

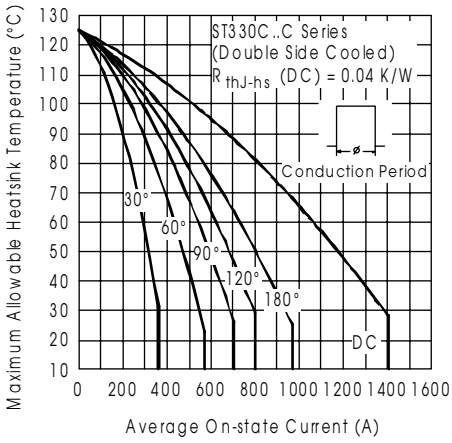

Fig. 4 - Current Ratings Characteristics

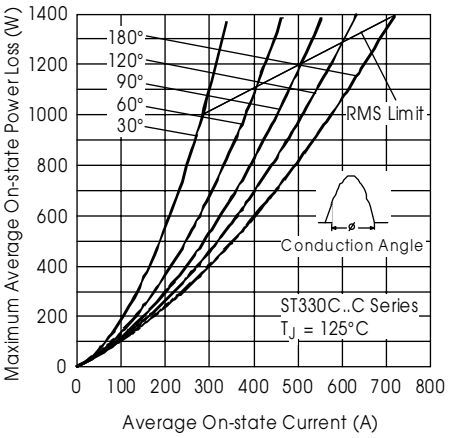

Fig. 5- On-state Power Loss Characteristics

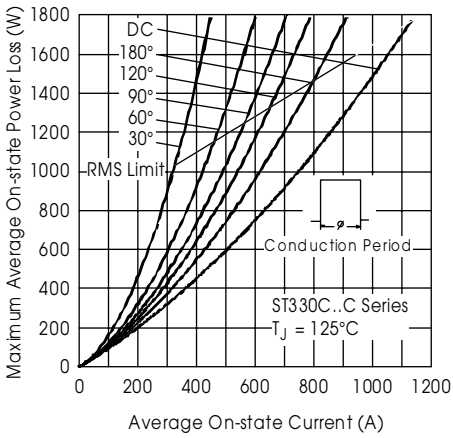

Fig. 6- On-state Power Loss Characteristics

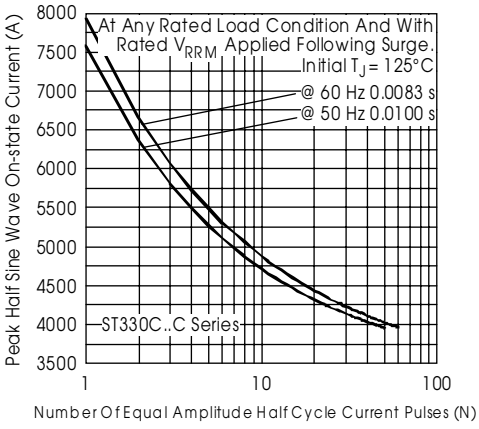

Fig. 7 - Maximum Non-Repetitive Surge Current
Single and Double Side Cooled

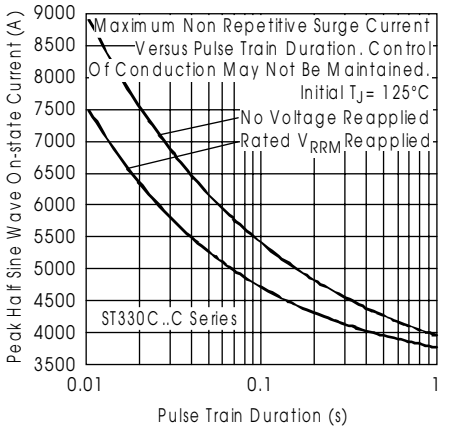

Fig. 8 - Maximum Non-Repetitive Surge Current
Single and Double Side Cooled

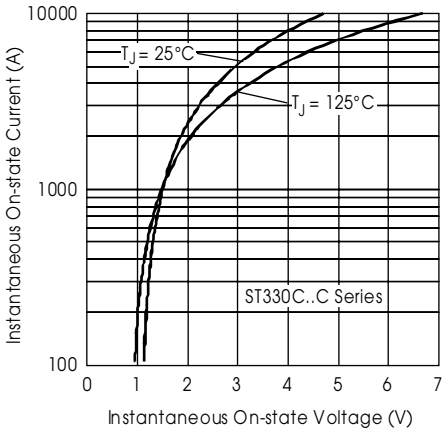

Fig. 9 - On-state Voltage Drop Characteristics

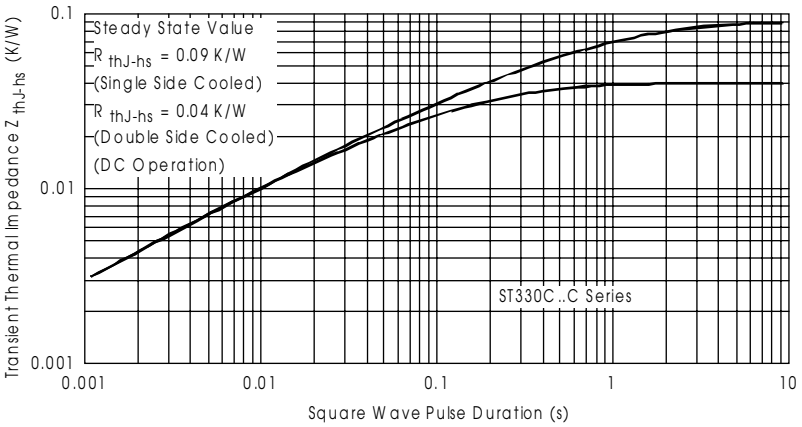

Fig. 10 - Thermal Impedance Z_{thJ-hs} Characteristics

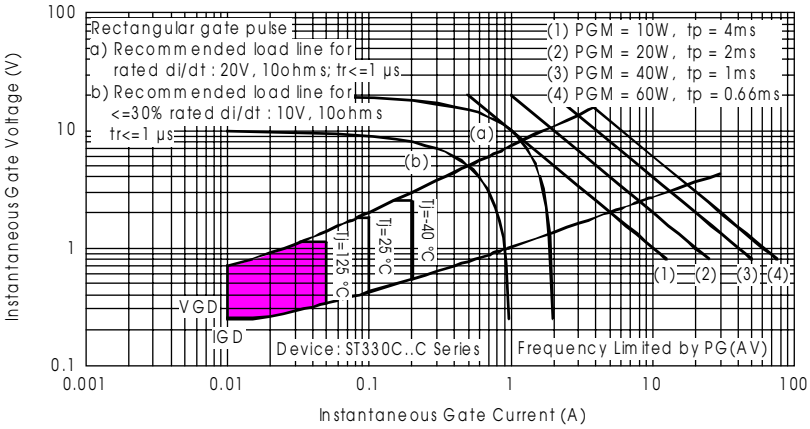

Fig. 11 - Gate Characteristics

Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331