

Part Number	Description
LS24D16C	16A, 240 Vac
LS24D21C	21A, 240 Vac
LS60D22C	22A, 600 Vac
LS24D27C	27A, 240 Vac
LS60D27C	27A, 600 Vac
LS60D30C	30A, 600 Vac

Part Number Explanation

LS 24 D 16 C
 | | | |
 Series Switch Type² Control Range³
 Line Voltage¹ Output Current - Amps

NOTES

- 1) Line Voltage (nominal): 24 = 240 Vac; 60 = 600 Vac
- 2) Switch Type: D = Zero-cross turn-on
- 3) Control Range: C = 4-14 Vdc (N = 8-32 Vdc also available)

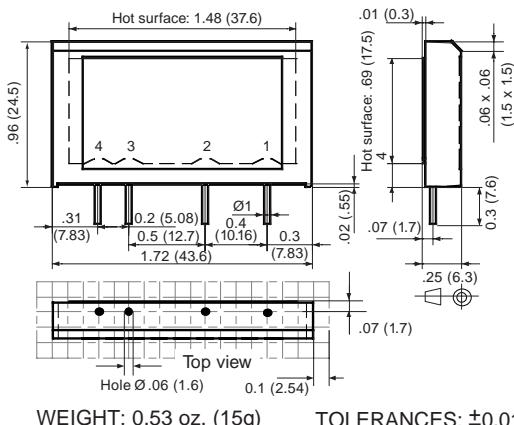
MECHANICAL SPECIFICATION


Figure 1 — LS relays; dimensions in inches (mm)
(See Figure 12 for LS with HS1)

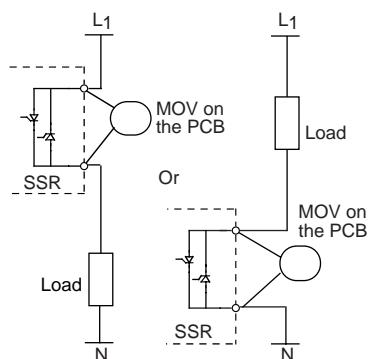
TYPICAL APPLICATION


Figure 2 — LS relays


FEATURES/BENEFITS

- Industry standard package
- Designed for external heat-sink attachment
- Over-sized thyristor ratings
- Direct-copper bonding technology

DESCRIPTION

These solid-state single inline package (SIP) relays are designed for mounting on printed circuit boards. The Series LS relays facilitate heat sinking by providing an interface surface. The relays are designed with 16A, 25A and 50A thyristors. They can switch loads with high starting currents. The nominal switched currents depend on the size of the heat sink and are limited by the cross section of the tracks of the printed circuit (mainly 25A/30A). The relays use a direct-bonded copper substrate for thermal efficiency, thermal stress performance and long-life expectancy.

APPLICATIONS

- Motor control — Pumps, reversing, integration of relays in terminal boxes
- Lamp control — Infrared drying, traffic lights, theater lighting

APPROVALS

All models are UL recognized.
UL File Number: E128555.

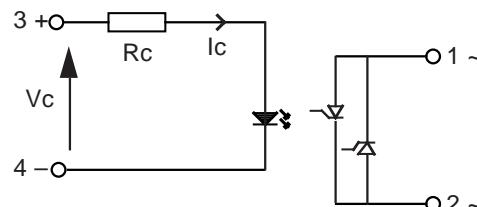
BLOCK DIAGRAM


Figure 3 — LS relays

INPUT (CONTROL) SPECIFICATION

	Min	Max	Units
Control Range	4	14	Vdc
Input Current Range	6.5	30	mAdc
Must Turn-off Voltage	1		Vdc
Input Resistance (Typical)	440		Ohms

OUTPUT (LOAD) SPECIFICATION

	Min	Max	Unit
Operating Range			
LS24	12	280	Vrms
LS60	24	600	Vrms

Peak Voltage

LS24D16C	600	Vpeak
LS60D22C	1200	Vpeak

Load Current Range

LS24D16C	.005	16*	Arms
LS24D21C	.005	25*	Arms
LS60D22C	.005	25*	Arms
LS24D27C	.005	30*	Arms
LS60D27C	.005	30*	Arms
LS60D30C	.005	30*	Arms

*Limited by the heat sink

Maximum Surge Current Rating (Non-Repetitive)

(See Figure 6)

LS24D16C	160	Apeak
LS24D21C	250	Apeak
LS60D22C	300	Apeak
LS24D27C	600	Apeak
LS60D27C	600	Apeak
LS60D30C	1000	Apeak

On-State Voltage Drop

All relays	1.6	V
------------	-----	---

Zero-Cross Window (Typical)

All relays	±12	V
------------	-----	---

Off-State Leakage Current (60Hz)

All relays	1	mA
------------	---	----

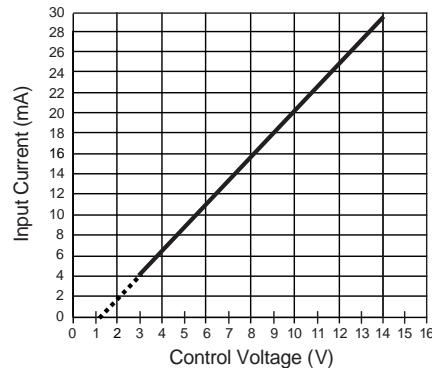
CONTROL CHARACTERISTIC


Figure 4 — LS relays

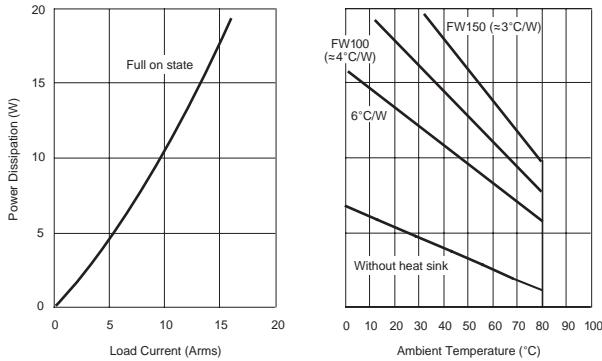
THERMAL CHARACTERISTICS


Figure 5a — LS24D16C relay

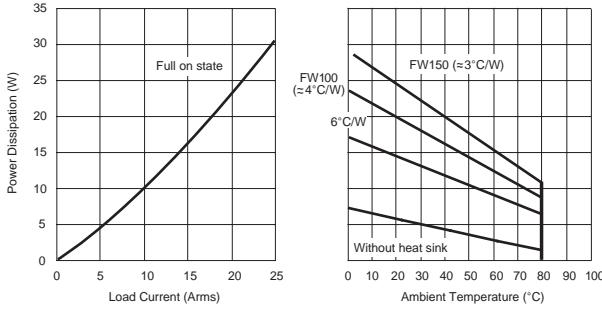


Figure 5b — LS24D21C, LS60D22C relays

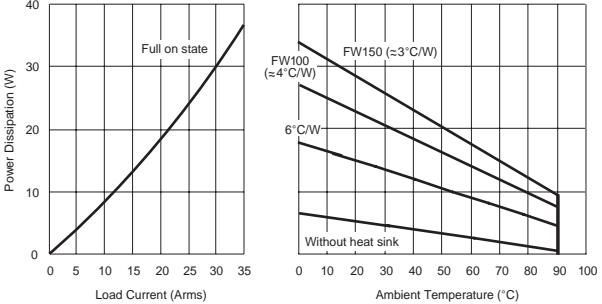


Figure 5c — LS24D27C, LS60D27C, LS60D30C relays

OUTPUT (LOAD) SPECIFICATION (continued)

	Min	Max	Unit
Turn-On Time (60Hz)			
All relays	8.3	ms	
Turn-Off Time (60Hz)			
All relays	8.3	ms	
Off-State dv/dt			
All relays	500	V/ μ s	
Operating Frequency			
All relays	10	440	Hz
I ² t for match fusing (<8.3ms)			
LS24D16C	128	A ² S	
LS24D21C	312	A ² S	
LS60D22C	450	A ² S	
LS24D27C	1800	A ² S	
LS60D27C	1800	A ² S	
LS60D30C	5000	A ² S	

ENVIRONMENTAL SPECIFICATION

	Min	Max	Unit
Operating Temperature	-40	80	°C
Storage Temperature	-40	120	°C
Input-Output Isolation	4000		Vrms
Output-Case Isolation	3300		Vrms

NOTES:

1. MOV across the output recommended for non-resistive loads — minimum size: 14mm
2. Maximum current based on size of the heat sink and the ambient temperature.
3. For 800Hz applications, contact factory.
4. For additional/custom options, contact factory.

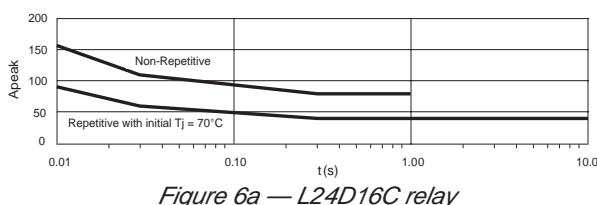
SURGE CURRENTS


Figure 6a — L24D16C relay

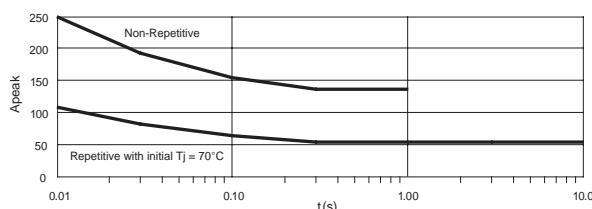


Figure 6b — LS24D21C relay

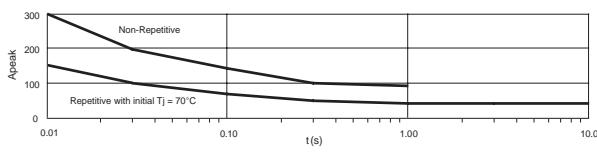


Figure 6c — LS60D22C relay

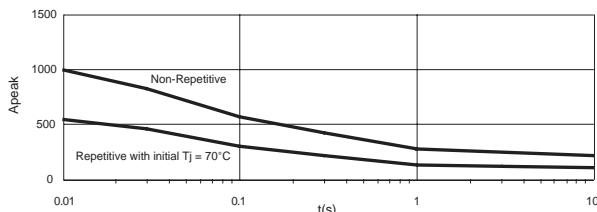


Figure 6e — LS60D30C relay

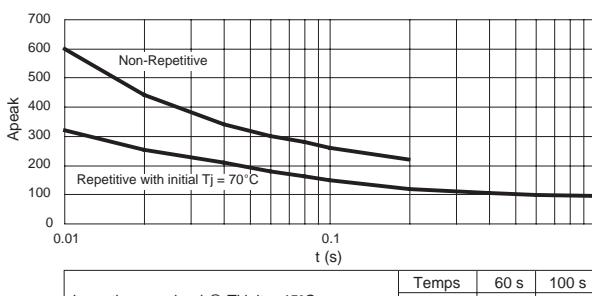



Figure 6d — LS60D27C, LS24D27C relays

MOUNTING EXAMPLES

Heat sinks references:

FW100: L=100mm about 4°C/W (1SSR) without ventilation (3.6°C/W with 4SSRs)

FW150: L=150mm about 3°C/W (1SSR) without ventilation (2.6°C/W with 6SSRs)



Clips reference: L19101

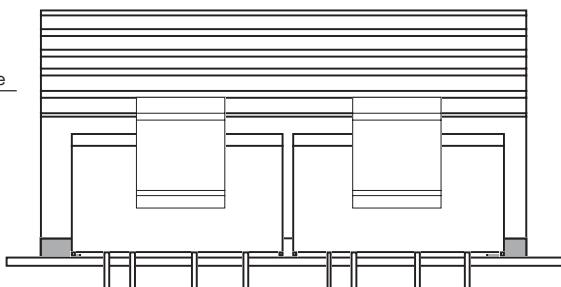
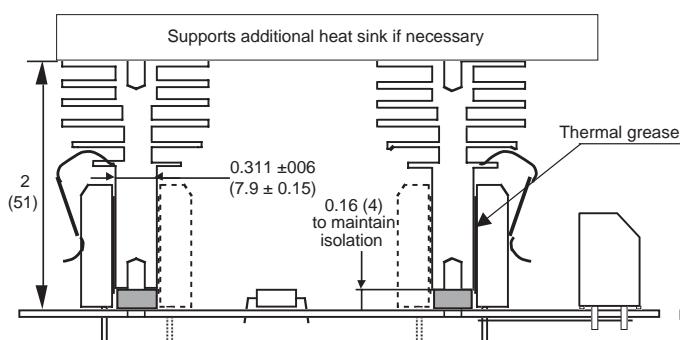


Figure 7a — Thermal heat sinks with mounting clips; dimensions in inches (mm)

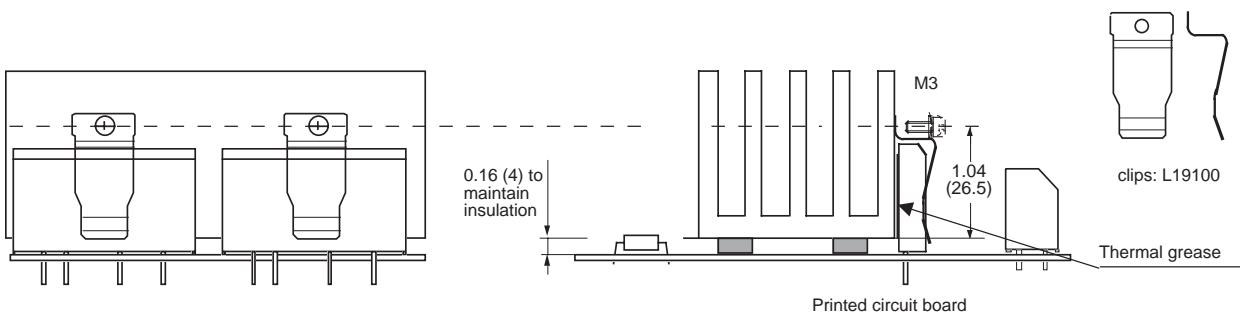


Figure 7b — Clips with screws on standard heat sinks; dimensions in inches (mm)

In each case, allow 0.16 in. (4mm) between the printed circuit board and the heat sink to keep a correct insulation between input to output (0.16 in./4mm insulated washer). To maintain a good contact between the SSR and the heat sink, use thermal grease.

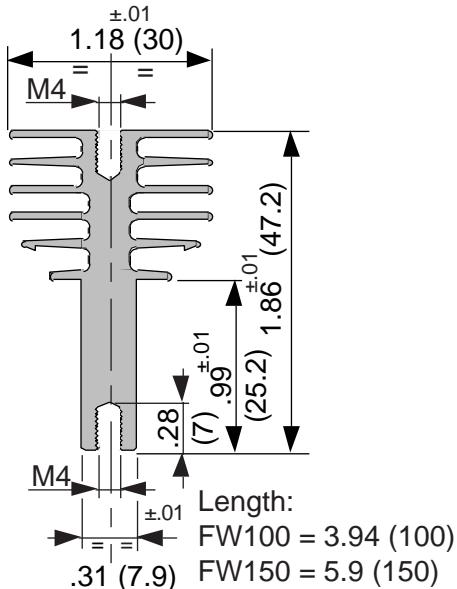
MECHANICAL SPECIFICATION


Figure 8 – FW100 and FW150 heat sinks;
dimensions in inches (mm)

FW100 heat sink with Max Clip System*

R_{th} = 3.6°C/W (4 SSRs)

R_{th} = 4°C/W (1 SSR)

FW150 heat sink with Max Clip System*

R_{th} = 2.6°C/W (4 SSRs)

R_{th} = 3°C/W (1 SSR)

*The Max Clip System of Aavid Thermalloy, patented worldwide

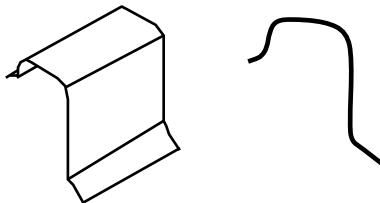
L19101 CLIP


Figure 9a – Clip for FW100 and FW150 heat sinks

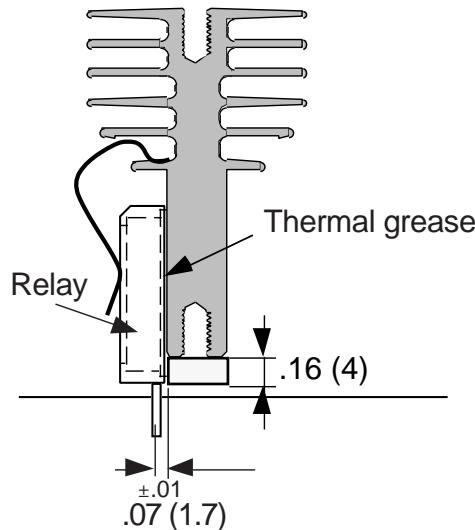


Figure 9b – Mounting with L19101 clip;
dimensions in inches (mm)

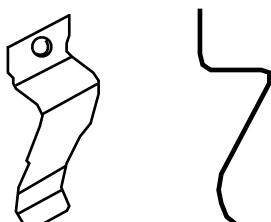
L19100 CLIP


Figure 10a – Clips with
screws for other heat sinks

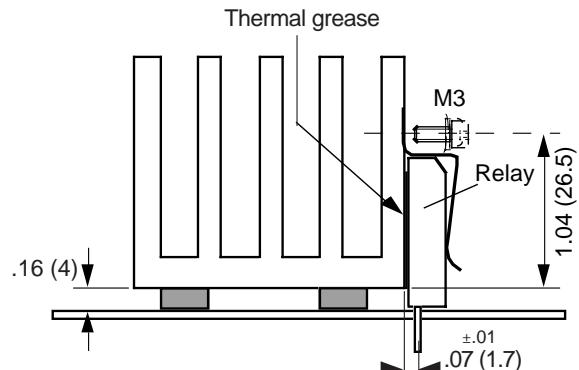


Figure 10b – Mounting with L19100 clip;
dimensions in inches (mm)

NOTES

- 0.16-inch (4mm) mounting washer must have correct insulation between input to output.


HS1 HEAT SINK

Series LS

LS WITH HS1 HEAT SINK



Figure 11 – LS with HS1

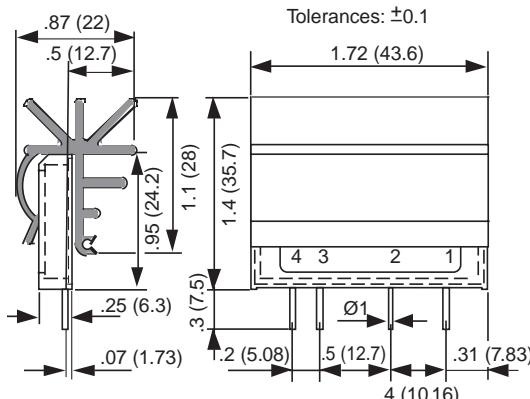

WEIGHT:
1.06 oz. (30g)

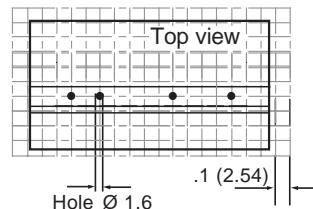


Figure 12 — LS relays with HS1;
dimensions in inches (mm)

INPUT (CONTROL) SPECIFICATION

	Min	Max	Units
Control Range			
LS24D16C-HS1	4	14	Vdc
LS60D22C-HS1	4	14	Vdc
LS24D16N-HS1	8	32	Vdc

Input Current Range

LS24D16C-HS1	6.5	30	mAdc
LS60D22C-HS1	6.5	30	mAdc
LS24D16N-HS1	3.5	18	mAdc

Must Turn-Off Voltage

All relays	1	Vdc
------------	---	-----

Input Resistance (Typical)

LS24D16C-HS1	440	Ohms
LS60D22C-HS1	440	Ohms
LS24D16N-HS1	1640	Ohms

LOAD CURRENT DERATING CURVE

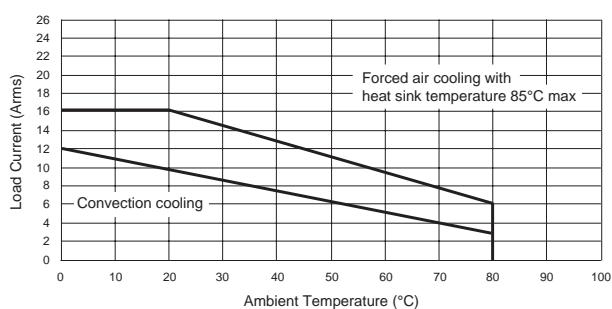


Figure 13a — LS24D16X-HS1 relays

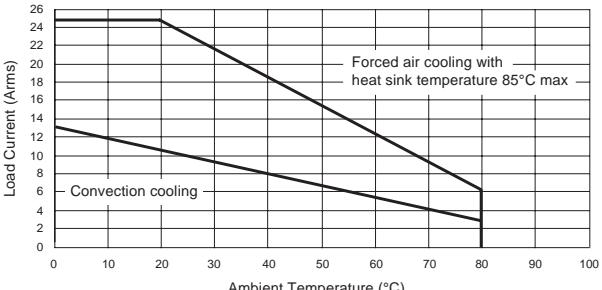


Figure 13b — LS60D22N-HS1 relays

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Teledyne Relays:](#)

[LS24D16C-HS1](#) [LS60D30C](#) [LS60DC10C-21](#)



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литер Н,
помещение 100-Н Офис 331