

Coin Cell Supercapacitors

KW Series



Description

Cooper Bussmann PowerStor supercapacitors are unique, ultra-high capacitance devices utilizing electrochemical double layer capacitor (EDLC) construction combined with new, high performance materials. This combination of advanced technologies allows Cooper Bussmann to offer a wide variety of capacitor solutions tailored to specific applications that range from a few micro-amps for several days to several amps for milliseconds.

The KW Series offers a wide range of high capacitance coin cell style products for use in memory and RTC back-up applications. End products include electricity meters, motor control units and solar inverters.

Features & Benefits

- High specific capacitance
- Low leakage current
- Long cycle life
- Eco-friendly

Applications

- RTC Back-up
- Electric utility meters
- Motor control units
- Solar inverters



Leaded Coin Cell Device

Specifications

Working Voltage	5.5V
Surge Voltage	6.3V
Capacitance	0.1F to 1.0F
Capacitance Tolerance	-20% to +80% (20°C)
Operating Temperature Range	-40°C to 85°C

Standard Product


Capacitance (F)	Part Number	Maximum Initial ESR (Ω) (Equivalent Series Resistance) Measured @ 1kHz	Maximum Dimensions (mm)	Typical Mass (grams/piece)
0.1	KW-5R5C104-R	50	$\varnothing = 13.5\text{mm}$; H = 8.30mm; P = 5mm	3.7
0.22	KW-5R5C224-R	50	$\varnothing = 13.5\text{mm}$; H = 8.30mm; P = 5mm	3.7
0.33	KW-5R5C334-R	50	$\varnothing = 13.5\text{mm}$; H = 8.30mm; P = 5mm	3.7
0.68	KW-5R5C684-R	30	$\varnothing = 21.5\text{mm}$; H = 9.00mm; P = 5mm	10.2
1.0	KW-5R5C105-R	30	$\varnothing = 21.5\text{mm}$; H = 9.00mm; P = 5mm	10.4

Performance


Parameter	Capacitance Change (% of initial measured value)	ESR (% of maximum initial ESR)
Life (1000 hrs @ 85°C @ 5.5Vdc)	$\leq 30\%$	$\leq 200\%$
Storage - Low and High Temperature (1000 hrs @ -40°C and 85°C)	$\leq 30\%$	$\leq 200\%$

Dimensions - mm								
Part Number	ØD Max	H±0.20	H1 Max	L(-)±0.20	L(+)±0.20	P±0.30	T	W±0.10
KW-5R5C104-R	13.5	8.05	8.30	6.10	5.70	5.00	0.40	0.80
KW-5R5C224-R	13.5	8.05	8.30	6.10	5.70	5.00	0.40	0.80
KW-5R5C334-R	13.5	8.05	8.30	6.10	5.70	5.00	0.40	0.80
KW-5R5C684-R	21.5	8.80	9.00	6.50	5.80	5.00	0.40	0.80
KW-5R5C105-R	21.5	8.80	9.00	6.50	5.80	5.00	0.40	0.80

0.1F to 0.33F

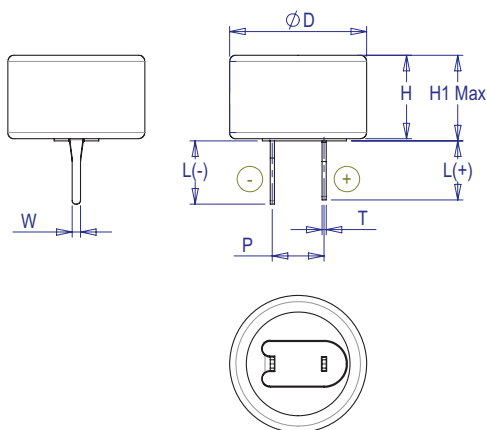

0.68F to 1.0F

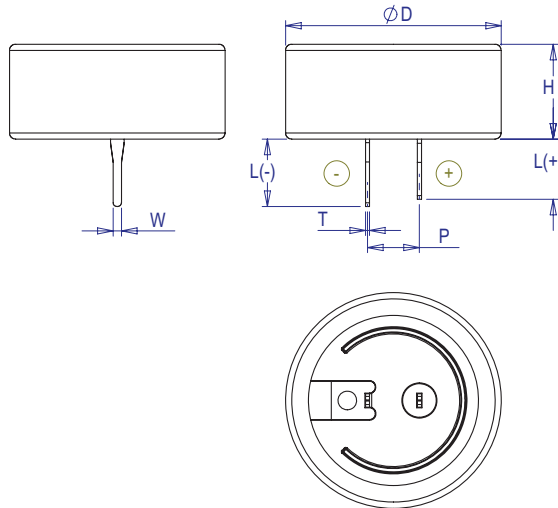

Part Numbering System										
KW	-	5	R	5	□	□	□	□	-	R
Series Code		Voltage (V)		Configuration	Capacitance (μF)				RoHS Compliant	
		R = Decimal			Value		Multiplier			
KW Series Wide Temperature		5R5 = 5.5V		C = Cylindrical	Example: 104 = 10 x 10*μF or 0.1F					

Packaging Information

Standard bulk packaging:

KW-5R5C104-R, KW-5R5C224-R, KW-5R5C334-R - 400 units

KW-5R5C684-R, KW-5R5C105-R - 500 units

Part Marking

Manufacturer

Capacitance (F)

Nominal Working Voltage (V)

Series Code (or part number)

Polarity

North America

Cooper Bussmann
1225 Broken Sound Parkway NW
Suite F
Boca Raton, FL 33487-3533
Tel: 1-561-998-4100
Fax: 1-561-241-6640
Toll Free: 1-888-414-2645

Cooper Bussmann
P.O. Box 14460
St. Louis, MO 63178-4460
Tel: 1-636-394-2877
Fax: 1-636-527-1607

Europe

Cooper Bussmann
Cooper (UK) Limited
Burton-on-the-Wolds
Leicestershire • LE12 5TH UK
Tel: +44 (0) 1509 882 737
Fax: +44 (0) 1509 882 786

Cooper Bussmann
Avda. Santa Eulalia, 290
08223
Terrassa, (Barcelona), Spain
Tel: +34 937 362 812
+34 937 362 813
Fax: +34 937 362 719

Asia Pacific

Cooper Bussmann
1 Jalan Kilang Timor
#06-01 Pacific Tech Centre
Singapore 159303
Tel: +65 278 6151
Fax: +65 270 4160

The only controlled copy of this Data Sheet is the electronic read-only version located on the Cooper Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Cooper Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Cooper Bussmann does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

© 2012 Cooper Bussmann
www.cooperbussmann.com





**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331