


DIMENSIONS FOR LARGE POLARIZATION RIB TERMINAL ONLY



NOTES: (UNLESS OTHERWISE SPECIFIED)

- MATING TERMINAL SHOWN ON SD-33000-001
- MATERIAL: ASTM B422, UNS C19025, HR04
THICKNESS: 0.30 mm ±0.01
TEMPER: FULL HARD (REF)
TENSILE: 496 MIN MPA
- TIN PLATED TERMINAL FINISH:
OVERALL UNDERPLATE ELECTRODEPOSITED NICKEL
OVERALL ELECTRODEPOSITED REFLOW TIN
- GOLD PLATED TERMINAL FINISH:
OVERALL UNDERPLATE ELECTRODEPOSITED DUCTILE SULFAMATE NICKEL
CONTACT AREA - ELECTRODEPOSITED GOLD
GRIP AREA - ELECTRODEPOSITED 100% TIN MATTE FINISH
- SILVER PLATED TERMINAL FINISH:
OVERALL UNDERPLATE ELECTRODEPOSITED DUCTILE SULFAMATE NICKEL
CONTACT AREA - ELECTRODEPOSITED PURE SILVER (0.5% MAX IMPURITIES) SEMI-BRIGHT FINISH
- SILVER ANTI-TARNISH : EVABRITE
GRIP AREA - ELECTRODEPOSITED 100% TIN MATTE FINISH
- MEETS PERFORMANCE SPECIFICATION FOR CABLE TO TERMINAL ELECTRICAL CRIMPS PER SAE/USCAR-21 (8/2001)
- MEETS PERFORMANCE STANDARD FOR AUTOMOTIVE ELECTRICAL CONNECTOR SYSTEMS FOR SAE/USCAR-2, REV. 4 (TEMP CLASS 3) (4/2001)
- MEETS ELECTRICAL CONNECTION SYSTEM DESIGN SPECIFICATION (SDS) REV.11 (5/2002)
- MEETS FIELD CORRELATED LIFE TEST (FCLT) PER SAE/USCAR-20 (11/2001)
- MEETS WIRING COMPONENT DESIGN GUIDELINES SAE/USCAR-12 REV 2 (12/2001)
- TSC ON A DIMENSION TO BE INTERPRETED AS DISTANCE TO A THEORETICAL SHARP CORNER AS IF THE RADIUS WERE NOT PRESENT
- REFERENCE 97BG-14474-AAB FOR LARGE POLARIZATION RIB CAVITY SPECIFICATION
- INSERTION FORCE (TIN) AVG. FROM PV TESTING =
3.8N LARGE POLARIZATION RIB
3.5N SMALL POLARIZATION RIB (REFERENCE)
- ALL DIMENSIONS EXCEPT (1), (2), (3) & (4) ARE COMMON TO BOTH SMALL AND LARGE POLARIZATION RIB TERMINALS
- REFERENCE PK-31300-516 FOR REEL DIRECTION
- REFERENCE AS-33012-002 FOR CRIMP INFORMATION

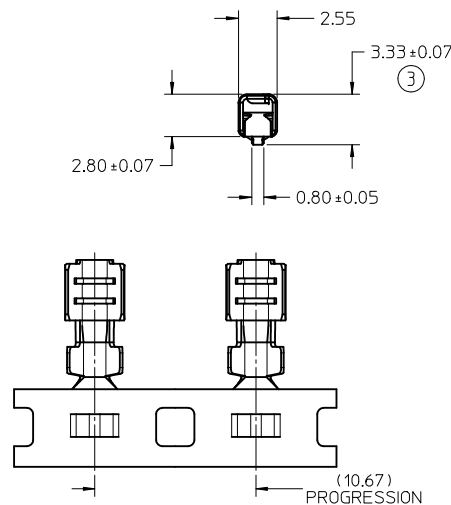


STAMP PLATING TYPE
Sn-TIN, Au-GOLD OR
Ag-SILVER IN THIS
AREA

SEE SHEET 5
0.35mm² AND 0.50mm²
ISO WIRE SIZE P/N'S
33012-2004/3004
33001-4005/5005

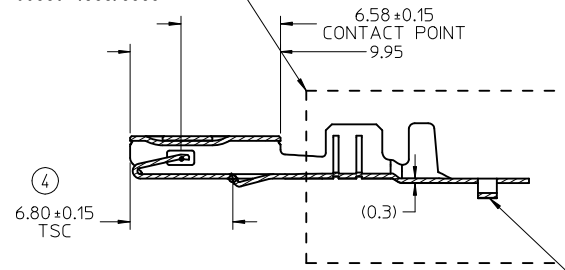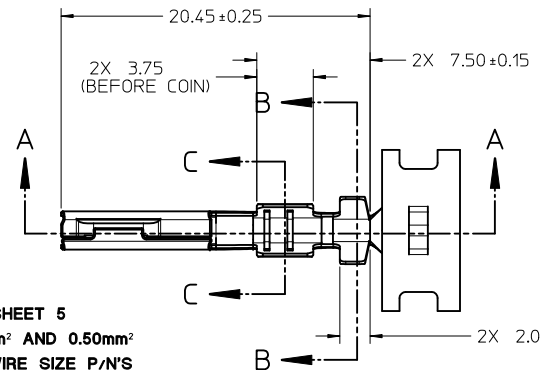


SECTION A-A


CARRIER BUMP DIRECTION
POINTS DOWN FOR TIN PLATED TERMINALS
POINTS UP FOR PRECIOUS PLATED TERMINALS



SCALE 2:1



SECTION B-B SCALE 5:1



SECTION C-C SCALE 5:1

ENTER DESCRIPTION
EC NO: UAU2011-1208
DRAWN:ADHIR 2011/06/28
CHKD:
APPR:BMOSER 2011/07/06
REV

QUALITY SYMBOLS
▽=0
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± 0.10	± 0.004
3 PLACES	± 0.005	± 0.0002
2 PLACES	± 0.10	± 0.004
1 PLACE	± 0.3	± 0.012
ANGULAR ± 3 °		

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM ONLY

DRAWN BY	DATE
L. PULLIAM	2005/06/21
CHECKED BY	DATE
A. DHIR	2005/06/21
APPROVED BY	DATE
B. MOSER	2005/06/22

MATERIAL NO.
SEE TABLE

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
4:1	METRIC	

MX150
RECEPTACLE TERMINAL

MOLEX INCORPORATED

DOCUMENT NO. SD-33012-002

SHEET NO. 1 OF 5



THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

	13	12	11	10	9	8	7	6	5	4	3	2	1			
J	TABLE													J		
	SUPPLIER PART NUMBER	PLATING	GRIP CODE	WIRE APPLICATION		A ±0.30	B ±0.30	C ±0.30	D ±0.30	COMMENTS						
	SMALL POLARIZATION RIB															
	RIGHT PAYOFF DIRECTION B	LEFT PAYOFF DIRECTION D			SAE (AWG)	METRIC (mm²)										
	33012-2001	33012-3001	TIN	14	14/16	2.0-15	3.9	4.4	1.7	1.6						
	33012-2002	33012-3002	TIN	18	18/20	1.0-0.75	3.3	3.1	1.3	1.4						
	33012-2003	33012-3003	TIN	22	22	0.35-0.50	2.5	2.6	0.9	1.0						
I	33012-2004	33012-3004	TIN	M3	N/A	0.35-0.50	2.5	2.7	0.9	154±0.1	PREFERRED TERMINAL FOR USE IN SEALED APPLICATION WITH 0.35& 0.50 WIRES (OD 1.2-1.7mm)					
	33001-2003	33001-3003	GOLD	14	14/16	2.0-15	3.9	4.4	1.7	1.6						
	33001-2004	33001-3004	GOLD	18	18/20	1.0-0.75	3.3	3.1	1.3	1.4						
	33001-2005	33001-3005	GOLD	22	22	0.35-0.50	2.5	2.6	0.9	1.0						
	33001-4001	33001-5001	SILVER	14	14/16	2.0-15	3.9	4.4	1.7	1.6						
H	33001-4002	33001-5002	SILVER	18	18/20	1.0-0.75	3.3	3.1	1.3	1.4						
	33001-4003	33001-5003	SILVER	22	22	0.35-0.50	2.5	2.6	0.9	1.0						
	33001-4005	33001-5005	SILVER	M3	N/A	0.35-0.50	2.5	2.7	0.9	154±0.1	PREFERRED TERMINAL FOR USE IN SEALED APPLICATION WITH 0.35& 0.50 WIRES (OD 1.2-1.7mm) USE IN CLASS 3 (125° C) APPLICATIONS ONLY					
	LARGE POLARIZATION RIB - NOT TO BE USED IN MX150 SEALED CONNECTORS															
	G	33012-2021	33012-3021	TIN	14	14/16	2.0-15	3.9	4.4	1.7	1.6					
33012-2022		33012-3022	TIN	18	18/20	1.0-0.75	3.3	3.1	1.3	1.4						
33012-2023		33012-3023	TIN	22	22	0.35-0.50	2.5	2.6	0.9	1.0						
33001-2021		33001-3021	GOLD	14	14/16	2.0-15	3.9	4.4	1.7	1.6						
33001-2022		33001-3022	GOLD	18	18/20	1.0-0.75	3.3	3.1	1.3	1.4						
F	33001-2023	33001-3023	GOLD	22	22	0.35-0.50	2.5	2.6	0.9	1.0						
	33001-4021	33001-5021	SILVER	14	14/16	2.0-15	3.9	4.4	1.7	1.6						
	33001-4022	33001-5022	SILVER	18	18/20	1.0-0.75	3.3	3.1	1.3	1.4						
	33001-4023	33001-5023	SILVER	22	22	0.35-0.50	2.5	2.6	0.9	1.0						
E														E		
D														D		
C														C		
B														B		
A														A		
ENTER DESCRIPTION EC NO: UAU2011-1208 DRWN:ADHIR CHKD: B3 2011/06/28 2011/07/06 APPR:BMOSER REV																
QUALITY SYMBOLS ▽=0 ▽=0 ▽=0 DESCRIPTION																
GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± 0.005 ± --- 2 PLACES ± 0.10 ± --- 1 PLACE ± 0.3 ± --- ANGULAR ± 3 ° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS																
DIMENSION STYLE MM ONLY DRAWN BY DATE L. PULLIAM 2005/06/21 CHECKED BY DATE A. DHIR 2005/06/21 APPROVED BY DATE B. MOSER 2005/06/22 MATERIAL NO. SEE TABLE SIZE C																
SCALE DESIGN UNITS METRIC TITLE MX150 RECEPTACLE TERMINAL MOLEX INCORPORATED DOCUMENT NO. SD-33012-002 SHEET NO. 2 OF 5																
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																
ib_frame_C_P_AM_T Rev. F 2009/06/18																
	12	11	10	9	8	7	6	5	4	3	2	1				

HOUSING
GROMMET SEAL
GROMMET CAP
SECTION G-G

G
G
GROMMET CAP OPENING

GROMMET SEAL / CAP CONFIGURATION TO MODIFY
LARGE POLARIZATION RIB CAVITY TO ACCEPT
SMALL POLARIZATION RIB APPLICATIONS







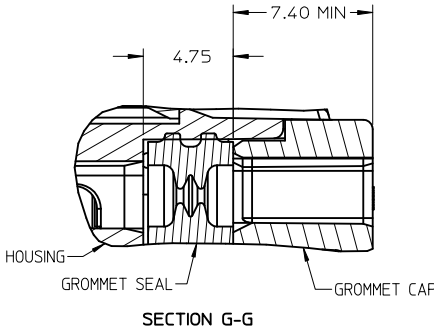


GROMMET SEAL / CAP CONFIGURATION TO MODIFY
LARGE POLARIZATION RIB CAVITY TO ACCEPT
SMALL POLARIZATION RIB APPLICATIONS

THIS CHECKING - AID IS FOR SMALL POLARIZATION RIB TERMINALS ONLY



CHECKING - AID ASSEMBLY
SCALE 1:1

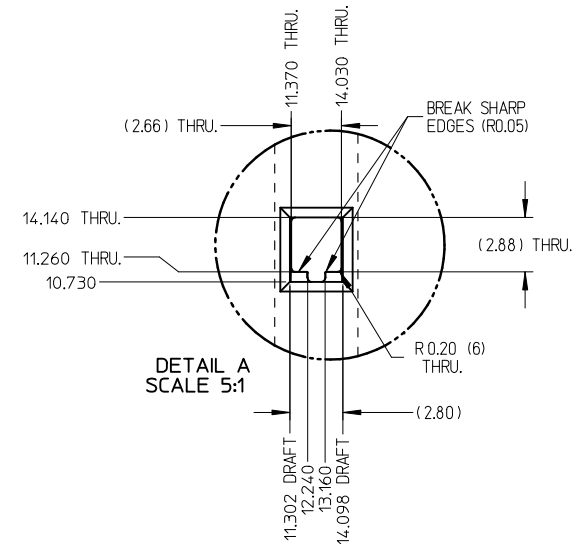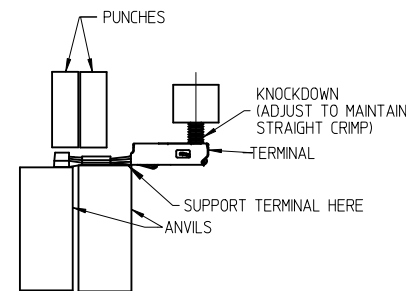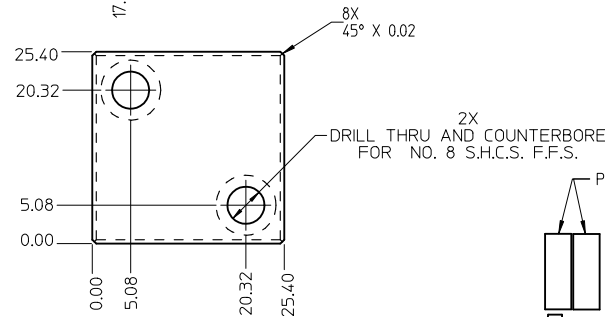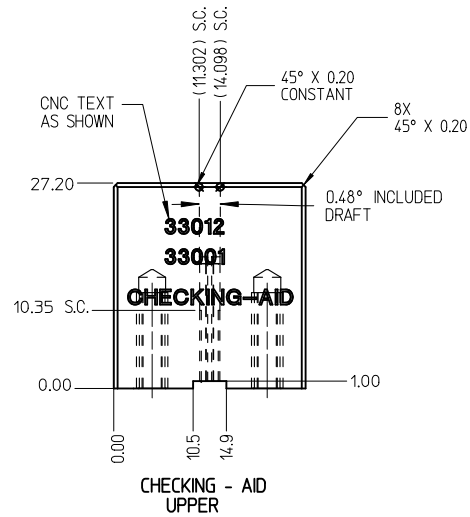

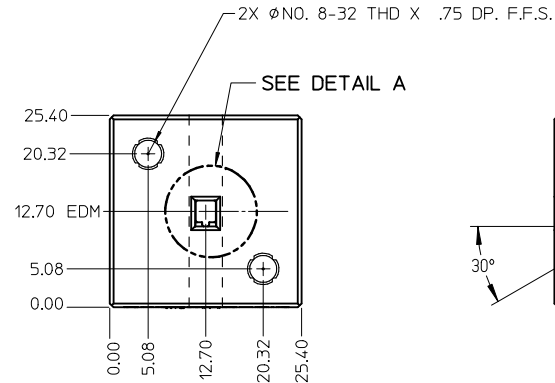


CRIMP REQUIREMENTS:

1. CRIMP STRAIGHTNESS MUST BE MAINTAINED
USE A KNOCKDOWN TOOL LOCATED AS SHOWN
TERMINAL BOX MUST NOT BE DEFORMED
2. AFTER CRIMPING, THE CRIMPED TERMINAL (AND UP TO 5 mm
OF WIRE PAST THE INSULATOR CUTOFF TAB) MUST FIT FREELY
INTO THE CHECKING-AID SHOWN ON THIS PAGE
3. FOR OTHER MECHANICAL REQUIREMENTS ON CRIMPED
TERMINALS, REFER TO SAE/USCAR-21 (5-13-02)
SECTIONS 4.2 (VISUAL INSPECTION), 4.2 (CROSS SECTION
ANALYSIS) AND 4.4 (CONDUCTOR CRIMP PULLOUT FORCE)





UPPER & LOWER
CHECKING-AID
A2 TOOL STEEL
HARDEN & GRIND
ROCKWELL "C" 56-58

ENTER DESCRIPTION EC NO: UAU2011-1208 DRWN:ADHIR CHKD: APPR:BMOSER	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION			
					mm	INCH	DRAWN BY L. PULLIAM	DATE 2005/06/21	TITLE MX150 RECEPTACLE TERMINAL				
			4 PLACES		± ---	± ---	CHECKED BY A. DHIR	DATE 2005/06/21					
			3 PLACES		± 0.005	± ---	APPROVED BY B. MOSER	DATE 2005/06/22					
			2 PLACES		± 0.10	± ---	MATERIAL NO.				DOCUMENT NO.	SHEET NO. 3 OF 5	
			1 PLACE		± 0.3	± ---	SEE TABLE		SD-33012-002				
			ANGULAR ± 3 °			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE C			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

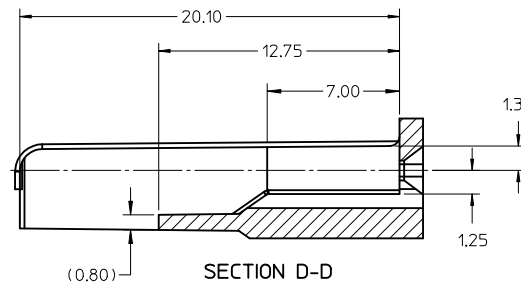


NOTES: UNLESS OTHERWISE SPECIFIED

1. TOLERANCES: LINEAR ± 0.10
ANGULAR $\pm 3^\circ$
2. ALL DRAFT WITHIN TOLERANCE.
3. MAX RADII ON ALL CORNERS SHOWN SHARP: 0.10
4. MAX FLASH PERMISSIBLE: 0.1
5. EJECTOR PIN MARKS PERMISSIBLE IF FLUSH TO 0.25 BELOW SURFACE.
6. MATERIAL: HOUSING/FINGER SPECIFICATION ENGINEERED FOR MATERIAL WITH THE FOLLOWING PROPERTIES:
A. FLEXURAL MODULUS = 4,500 TO 9,400 MPa
PER ASTM TEST D790
B. ELONGATION AT YIELD = 2.3% OR BETTER
PER ASTM TEST D638 TYPE V
7. CAVITY SPEC FOR USE ONLY WITH MOLEX RECEPTACLE
TERMINAL PART NUMBERS SPECIFIED ELSEWHERE ON THIS
DRAWING

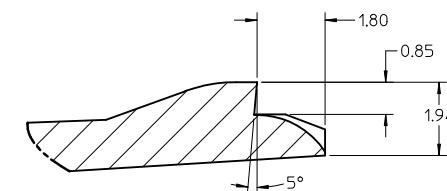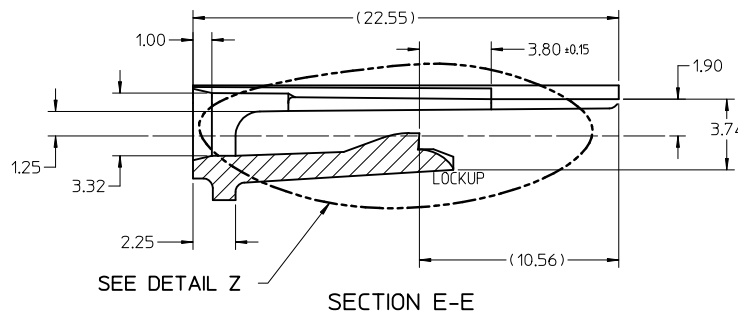



DETAIL Z
SCALE 20:1

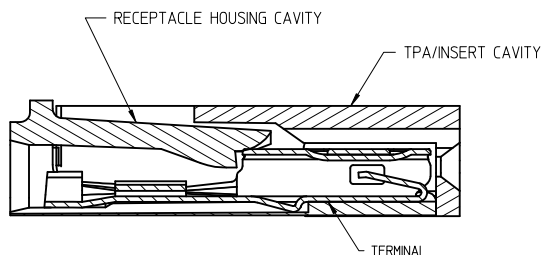


SECTION F-F

RECEPTACLE CAVITY ASSEMBLED VIEWS
FOR SMALL POLARIZATION RIB APPLICATIONS
FIG. 1



SECTION D-D
FOR LARGE POLARIZATION RIB APPLICATIONS
FIG. 2



PROBING DOWN THE
THROAT MUST USE
THIS TERMINAL PROBE

PROBE PIN DETAILS:
MANUFACTURER: LONE STAR INDUSTRIAL
PART NUMBER: LS054R-403-N-4.6
PIN DIAMETER: 0.025 IN (0.64mm)
TIP SHAPE: SPHERICAL
TEL: 915-779-7255

PREFERRED PROBING LOCATION
IS NOT ON SPRING MEMBER

IF ELECTRICAL CONTINUITY PROBE
TOUCHES SPRING MEMBER USE
PROBING AS SHOWN IN FIG. 2


ENTER DESCRIPTION
EC NO: UAU2011-1208
DRAWN BY: DRWN:ADHR
CHKD: APPR:BMOSER
2011/06/28
2011/07/06

QUALITY
SYMBOLS
▽=0
▽=0
▽=0






GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± 0.005	± ---
2 PLACES	± 0.10	± ---
1 PLACE	± 0.3	± ---
ANGULAR $\pm 3^\circ$		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE MM ONLY	
DRAWN BY	DATE
L. PULLIAM	2005/06/21
CHECKED BY	DATE
A. DHIR	2005/06/21
APPROVED BY	DATE
B. MOSER	2005/06/22
MATERIAL NO.	
SEE TABLE	
SIZE	
C	

SCALE 5:1	DESIGN UNITS METRIC		THIRD ANGLE PROJECTION
TITLE MX150 RECEPTACLE TERMINAL			
MOLEX INCORPORATED			
DOCUMENT NO. SD-33012-002			SHEET NO. 4 OF 5
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			



ISO VIEW
SCALE 2:1

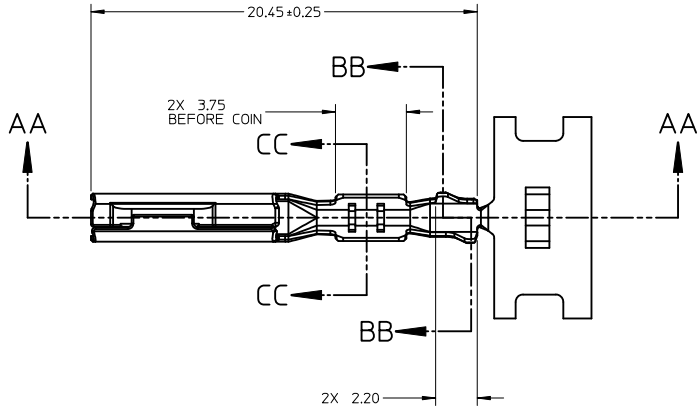

SECTION AA-AA

P/N'S 33012-2004/3004
33001-4005/5005

CARRIER BUMP DIRECTION
POINTS DOWN FOR TIN PLATED TERMINAL
POINTS UP FOR PRECIOUS METAL PLATED
TERMINAL

ENTER DESCRIPTION EC NO: UAU2011-1208 2011/06/28 DRWN:ADHIR CHKD: APPR:BMOSER 2011/07/06		DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	 THIRD ANGLE PROJECTION
						MM ONLY		5:1	METRIC	
						DRAWN BY DATE		TITLE		
						L. PULLIAM 2005/06/21		MX150 RECEPTACLE TERMINAL		
B3		REV		4 PLACES ± --- ± ---		CHECKED BY DATE		 MOLEX INCORPORATED		SHEET NO. 5 OF 5
				3 PLACES ±0.005 ± ---		A. DHIR 2005/06/21				
				2 PLACES ±0.10 ± ---		APPROVED BY DATE				
				1 PLACE ±0.3 ± ---		B. MOSER 2005/06/22				
B3		REV		ANGULAR ± 3 °		MATERIAL NO.		DOCUMENT NO.		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-33012-002		
				SIZE						
				C						



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331