

## Hook and Loop Cable Ties


The comprehensive family of hook and loop cable ties delivers reliability by protecting against over-tensioning of high performance fiber and copper cables. These ties are adjustable, releasable, and reusable to effectively support frequent moves, adds, and changes (MACs). A wide range of designs, sizes, and colors provides flexibility and an aesthetically pleasing appearance.



### Key Features

### Benefits

<b>Soft hook and loop material</b>	<b>Reliability</b> – Safe way to effectively bundle cables while maintaining network data integrity by protecting against over-tensioning; minimal installation time; no tools required
<b>Releasable design</b>	<b>Scalability</b> – Adjustable, releasable, and reusable to accommodate frequent moves, adds, and changes (MACs) which supports evolving changes to equipment and cabling for future growth; supports rapid deployment
<b>Wide range of designs, sizes, and colors</b>	<b>Aesthetics</b> – Allows design flexibility and provides a professional, finished appearance
<b>Plenum rated styles</b>	UL listed cable ties can be safely applied in plenum or air handling spaces per NEC, Section 300-22 (C) and (D)
<b>Comprehensive product offering</b>	Supports a wide range of applications; allows maximum installation flexibility



**TAK-TY® Loop Ties**  
Slot allows for pre-wrapping of bundles



**TAK-TY® Strip Ties**  
Rolls perforated in convenient 6", 12" or 18" strips



**TAK-TY® Stacked Strips**  
Eliminates cutting and staging 7" Strips (100 pieces)



**TAK-TY® Rolls**  
Lengths: 15' and 75' can be cut to any length



**TAK-TY® Cable Ties – Plenum-rated**  
UL Listed loop style and strip style



**ULTRA-CINCH™ Ties**  
Cinch ring provides extra strength




**ULTRA-CINCH™ Ties**  
Grommet styles for mounting applications



**TAK-TAPE™ Rolls**  
General purpose fastener

# TAK-TY® Hook & Loop Cable Ties

- Soft, premium material is safe to use on high performance cabling
- Adjustable, releasable, and reusable up to hundreds of times
- Broad selection of durable designs and sizes
- Select ties are UL listed for use in plenum or air handling spaces (such as ceiling voids and under floor areas) per NEC, Section 300-22 (C) and (D); flammability rating: UL 94V-2
- A full range of colors; see Color Chart on page 4



Rack application  
X-Out for #10 Truss Head Screw  
Loop Tie: HLT2I-X0



Available in eight colors


## Ordering Information




Overhead application  
Continuous rolls  
HLS-15R6



Convenient packaging (100 pcs.)  
HLB2S-CO



Underfloor (Plenum application)  
HLSP3S-X12  
HLTP3I-X12



Rack application  
Continuous rolls  
HLS-15R10, HLS-15R6

Part Number	Length		Width		Max. Bundle Dia.		Min. Loop Tensile Str.*		Std. Pkg. Qty.	Std. Ctn. Qty.
	In.	mm	In.	mm	In.	mm	Lbs.	N		

Loop Ties – Slot allows for pre-wrapping of bundles; X-Out allows for use with #10 truss head screw

HLT2I-X0	8.0	203	.500	12.7	1.91	49	40	178	10	100
HLT3I-X0	12.0	305	.500	12.7	3.18	81	40	178	10	100

UL Listed Loop Ties (Maroon) for plenum applications

HLTP2I-X12	8.0	203	.500	12.7	1.91	49	40	178	10	100
HLTP3I-X12	12.0	305	.500	12.7	3.18	81	40	178	10	100

UL Listed Loop Ties (Black) for plenum applications

HLTP2I-X0	8.0	203	.500	12.7	1.91	49	18	80	10	100
HLTP3I-X0	12.0	305	.500	12.7	3.18	81	18	80	10	100

Strip Ties – Perforated in convenient 6", 12", and 18" strips

HLS1.5S-X0	6.0	152	.750	19.1	1.50	38	50	222	10	100
HLS3S-X0	12.0	305	.750	19.1	3.20	81	50	222	10	100
HLS5S-X0	18.0	457	.750	19.1	5.00	127	50	222	10	100

**NEW!**

Stacked Strip Ties – Eliminates cutting ties to length and staging them for each job  
Rounded edges for installer safety - 100 pcs.

HLB2S-CO	7.0	178	.750	19.1	1.60	41	50	222	1	10
----------	-----	-----	------	------	------	----	----	-----	---	----

UL Listed Strip Ties (Maroon) for plenum applications

HLSP1.5S-X12	6.0	152	.750	19.1	1.50	38	50	222	10	100
HLSP3S-X12	12.0	305	.750	19.1	3.20	81	50	222	10	100
HLSP5S-X12	18.0	457	.750	19.1	5.00	127	50	222	10	100

UL Listed Strip Ties (Black) for plenum applications

HLSP1.5S-X0	6.0	152	.750	19.1	1.50	38	18	80	10	100
HLSP3S-X0	12.0	305	.750	19.1	3.20	81	18	80	10	100
HLSP5S-X0	18.0	457	.750	19.1	5.00	127	18	80	10	100

Part Number	Length		Width		Max. Bundle Dia.		Min. Loop Tensile Str.*		Std. Pkg. Qty.	Std. Ctn. Qty.
	Ft.	m	In.	mm	In.	mm	Lbs.	N		

Continuous Rolls – 15' and 75' Lengths – Can be cut to desired length, eliminating waste

HLM-15R0	15	4.6	.330	8.4	Various	Various	18	80	1	10
HLS-15R0	15	4.6	.750	19.1	Various	Various	50	222	1	10
HLS-75R0	75	22.9	.750	19.1	Various	Various	50	222	1	10

\*Minimum 2" overlap required to achieve loop tensile rating.


- Soft, premium material is safe to use on high performance cabling
- Adjustable, releasable, and reusable multiple times
- Unique material with hooks and loops on same side allows user to secure a greater range of bundle diameters, including smaller diameter bundles
- Low profile contoured cinch ring provides extra strength and bundle tightness, while reducing overall bundle size
- Grommet styles offer strength and assure reliable installations that resist pullout when bundling and mounting cables within cabinet applications
- Tapered tip facilitates easy, snag-free threading
- A full range of colors; see Color Chart on page 4




Three styles available in eight colors




Cinch tie on bundle  
UCT3S-X0

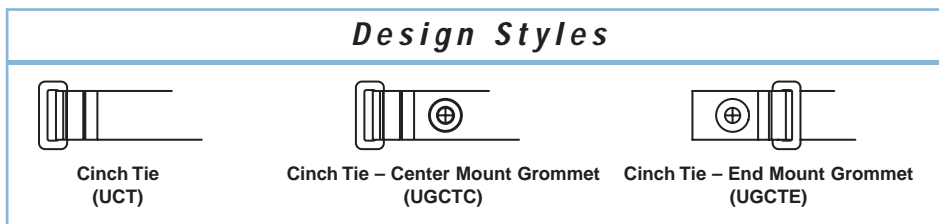

## Ordering Information




Cinch Tie mounted on rack  
UGTC3S-X0




Cinch Tie mounted within cabinet  
UGTC3S-X10

Part Number	Length		Width		Max. Bundle Dia.		Min. Loop Tensile Str.*		Std. Pkg. Qty.	Std. Ctn. Qty.
	In.	mm	In.	mm	In.	mm	Lbs.	N		
<b>Cinch Ties</b>										
UCT3S-X0	12.0	305	.850	21.6	3.00	76	50	222	10	100
UCT5S-X0	18.0	457	.850	21.6	5.00	127	50	222	10	100
<b>Cinch Ties – Center Mount Grommet (Bundle is centered over mounting point)</b>										
UGTC3S-X0	12.0	305	.850	21.6	3.00	76	50	222	10	100
UGTC5S-X0	18.0	457	.850	21.6	5.00	127	50	222	10	100
<b>Cinch Ties – End Mount Grommet (Bundle is offset from mounting point)</b>										
UGTE3S-X0	12.0	305	.850	21.6	3.00	76	50	222	10	100
UGTE5S-X0	18.7	475	.850	21.6	5.00	127	50	222	10	100

Note: 1/4" (6mm) diameter mounting hole on grommet style cinch ties.  
\*Minimum 2" overlap required to achieve loop tensile rating.



**UGTC**  
Bundle is centered  
over mounting point

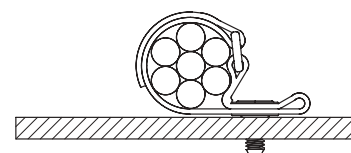

**UGTE**  
Bundle is offset from  
mounting point

Part Number	Part Description	Std. Pkg. Qty.	Std. Ctn. Qty.
<b>Flat Head Screws for Grommet Cinch Ties</b>			
UCTGS1224-X	12-24 UNC x 5/8mm (.625") flat head phillips screw.	10	100
UCTGSM5-X	M5 x 16mm flat head phillips screw.	10	100
UCTGSM6-X	M6 x 16mm flat head phillips screw.	10	100

## TAK-TAPE™ Hook & Loop Cable Tie Rolls

- Strong, low profile flexible material; safe to use on high performance cabling
- Adjustable, releasable, and reusable
- Cost effective for general purpose bundling
- Continuous rolls can be easily cut to size
- Leaves no residue
- Available in black color



Convenient packaging



TTS-35RX0

## Ordering Information

Part Number	Length		Width		Max. Bundle Dia.		Min. Loop Tensile Str.*		Packaging Description	Std. Pkg. Qty.	Std. Ctn. Qty.
	Ft.	m	In.	mm	In.	mm	Lbs.	N			
TTS-20R0	20	6.1	.750	19.1	Various	Various	40	178	One 20' roll in reusable plastic case.	1	10
TTS-35R3-0	35	10.7	.750	19.1	Various	Various	40	178	One package of three 35' rolls shrink wrapped.	1	8
TTS-35RX0	35	10.7	.750	19.1	Various	Various	40	178	One package of ten 35' rolls shrink wrapped; PANDUIT cutter included.	1	10

\*Minimum 2" overlap required to achieve loop tensile rating.

## Color Chart for Hook and Loop Cable Ties

	Black	Red	Orange	Yellow	Green	Blue	Gray	White	Maroon
Part Prefix	0	2	3	4	5	6	8	10	12
HLT, HLS, HLB, HLM	•	•	•	•	•	•	•	•	
HLTP, HLSP (Plenum)	•								•
UCT, UGCTC, UGCTE	•	•	•	•	•	•	•	•	
TTS	•								

## Related Network Bundling Products

### Elastomeric Cable Ties



- Elastic, flexible tie; safe on network cables and installers
- UL 94V-0 flammability rating meets telecommunication requirements
- Releasable and reusable

### Cable Bundle Organizing Tool



- Reduces cable installation time up to 50%
- Arranges 24 cables optimizing bundle size and improving installed appearance
- Accommodates a wide range of data cable diameters

### Cable Tie Mounts



- For use with hook and loop cable ties
- Unique cradle design provides maximum stability for cable bundle
- Choice of adhesive backed or screw mount styles provides installer flexibility

## WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA  
Markham, Ontario  
cs-dn@panduit.com  
Phone: 800.777.3300

PANDUIT EUROPE LTD.  
London, UK  
cs-emea@panduit.com  
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
cs-ap@panduit.com  
Phone: 65.6305.7575

PANDUIT JAPAN  
Tokyo, Japan  
cs-japan@panduit.com  
Phone: 81.3.3767.7011

PANDUIT LATIN AMERICA  
Jalisco, Mexico  
cs-la@panduit.com  
Phone: 52.333.777.6000

PANDUIT AUSTRALIA PTY. LTD.  
Victoria, Australia  
cs-aus@panduit.com  
Phone: 61.3.9794.9020

For a copy of PANDUIT product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)



For more information  
Visit us at [www.panduit.com](http://www.panduit.com)  
Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800-777-3300 and reference CTGB34

©2008 PANDUIT Corp.  
ALL RIGHTS RESERVED.  
Printed in the U.S.A.  
Product Bulletin Number SA-CTGB34  
3/2008



## Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

### Наши контакты:

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331