

### PL-1200RG-N FEATURES

Specifically designed for electro-surgical catheter applications, the compact and cost effective PL-1200 Series offers more features, contacts and termination options than the competition

#### Packaging (intuitive, compact, configurable)

- **Pulse-Lok®** auto-latch / quick release mechanism confirms continuity in critical surgical applications
- 14 standard color combinations
- Proprietary keying protects your single-use from being copied, or mated with the wrong connector
- Custom configurations including passive and active devices for coding or limiting catheter usage

#### Performance (for harsh environments)

- Water proof (IP-67 rated)
- Sterilizable
- Chemical resistant housing
- Up to 5,000 mating cycles (with std. Contacts)
- Factory terminated, overmolded cable assemblies for enhanced flex and stain relief

### SPECIFICATIONS

#### Electrical (see below)

Mating Life: 5,000 cycles min.  
Contact Resistance: < 10 milliohms\*

#### Material

Connector Housing: Thermoplastic  
Flex Reliefs: Thermoplastic Rubber  
Contacts/Sockets: Brass / BeCu,  
Gold Plate per MIL-G-45204  
Reusable Socket = 30-45µ" Gold over 50-200µ" Nickel strike  
Disposable Pin = 10-30µ" Gold over 50-200µ" Nickel strike

#### Mechanical

Mating Cycles: 5K cycles max  
Retention Force:  
• Mated Connectors: 50 lbs. Minimum  
• Cable to Connector: 50 lbs. Typical  
• Backshell to Connector: 50 lbs. Minimum

#### Environmental

- Operating Temp: -20C to +105C\*\*
- Moisture Resistance: to IP-67 (encapsulated)
- Sterilizable: gamma, EtO & Autoclave
- Chem. Resistance: common OR cleaning solvents

\* post conditioning

\*\*Dependent on overmold material


TABLE A:

STANDARD CONTACT CONFIGURATIONS & SPECIFICATIONS


| Number of Poles | Contact Size Pin $\phi$ (mm) | Max Wire Gauge | Operating Voltage Max | Operating Current Max (A) | Contact Resistance (ohms) |
|-----------------|------------------------------|----------------|-----------------------|---------------------------|---------------------------|
| 78              | 0.5                          | 26             | 300 V RMS             | 1.5                       | <10m                      |
| 59              | 0.5                          | 26             | 300 V RMS             | 1.5                       | <10m                      |
| 52              | 0.5                          | 26             | 300 V RMS             | 1.5                       | <10m                      |
| 45              | 0.5                          | 26             | 300 V RMS             | 1.5                       | <10m                      |
| 26              | 0.5                          | 26             | 300 V RMS             | 1.5                       | <10m                      |
| 19              | 0.5                          | 26             | 300 V RMS             | 1.5                       | <10m                      |

Custom contact inserts are available. Consult factory.

#### Up to 78 Contact Positions



#### Disposable Receptacle Assembly

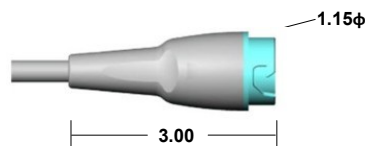

Shown with optional backshell (See Table C)


#### Disposable Receptacle



Select this component from Table B


#### Rear Panel-Mount Receptacle Assembly

Mounts from back of panel to achieve an IP-67 Seal



Panel Thickness Range = 0.063 to 0.250


#### Rear Panel-Mount Receptacle



Select this component from Table B

### STANDARD HOUSING OPTIONS

#### In-Line Plug Assembly

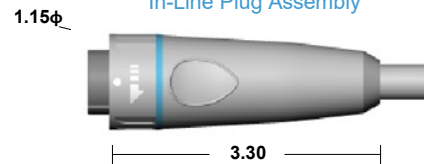

Shown with Overmolded Strain Relief  
In-Line Plug (For overmolding)



Select this component from Table B

# PL-1200RG-N SERIES

Plastic Shell Auto-Coupling Connectors **78 pole capacity interconnect system**

TABLE B:

STANDARD PART NUMBERS

| Number of Poles | Disposable Receptacle | Rear Panel-Mount Receptacle |        | In-Line Plug |
|-----------------|-----------------------|-----------------------------|--------|--------------|
|                 | Solder Cup            | Solder Cup                  | PCB    | Solder Cup   |
| 78              | 380588                | 380700                      | 380707 | 380000       |
| 59              | 380532                | 380728                      | 380735 | 380056       |
| 52              | 380504                | 380756                      | 380763 | 380112       |
| 45              | 380476                | 380784                      | 380791 | 380168       |
| 26              | 380448                | 380812                      | 380819 | 380224       |
| 19              | 380420                | 380840                      | 380847 | 380280       |

Note: Part numbers cover black housings in Key 1 configuration. For other color and housing options utilize the Amphenol Alden connector configurator located at [www.amphenolalden.com/configurator](http://www.amphenolalden.com/configurator)

**Options Include:**

Indicator Color Options

Black (std.), Gray, White, Blue, Red, Green, Yellow

Mating Key Options

2 Standard Keys, Proprietary Keys Available


Panel-Mount Thickness Options

.125 (std.), .063, .187, .250

## CONTACT TERMINATION OPTIONS


### Termination Styles

#### Pin Length & Application



Intended for termination to flex circuit

#### Pin Length & Applications



Intended for mounting on rigid PC Board

#### Flex Circuits Benefits


Facilitates the automated internal application of passive and active electronic components

Facilitates the introduction of automated mass termination techniques. These termination methods are extremely cost effective when terminating 52 pole connectors

### Panel 1

### Panel 2

#### PCB (Panel-Mount Receptacles only)



Request Sales Drawing for PCB mounting template

#### Features & Benefits


- Available in most pole counts from 9 to 52 Poles
- PCB stand-offs ensure proper positioning
- Convenient packaging high temperature contact cures may be soldered to PCB and snapped into panel-mounted receptacle housing later



#### Features & Benefits

Tiered solder cups provide easy access to center positions. Canted cups facilitate quick and easy wire positioning. Standard on 9-52 pole configurations

#### Panel-Mount, Cut-Out Template

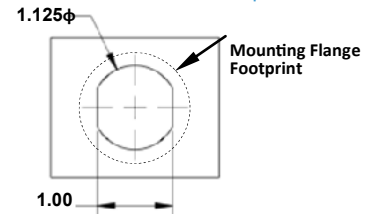

Applies to Rear Panel-Mount Receptacles

TABLE C:

## ACCESSORIES

#### Backshell



Standard color is black. Gray is optional.

(Wire exit i.d.)

A

Dimension A

0.260

0.260

Part Number

107802-01

107802-02



P/N 108552-01  
Standard material is black PVC

#### Disposable Receptacle Backshell:

In applications where the disposable receptacle is attached directly to a cable or catheter this one piece backshell is available to protect light gauge wire terminations and provide an anchor point for the catheter jacket. These backshells snap into place and may be encapsulated

#### Panel-Mount Receptacle Dust Cover



P/N 109767-01  
Black (std.) Gray (opt.)

#### Panel-Mount Receptacle Dust Cover:

The PL1200 Series receptacle dust cover protects the receptacles contact system from dust, moisture, and mechanical stress when the connector pair is disengaged. When secured the dust cover will provide an IP-67 environmental seal. The cover is equipped with a tether for security.

#### Plug Soaking Cap



P/N 109766-01  
Black (std.) Gray Optional

#### Plug Soaking Cap:

The PL1200 Series Plug Soaking Cap is designed to protect the plug's contact system when a cable assembly is being cleaned or not in use. The soaking cap locks onto the plug providing an IP-67 seal that is ideal for soaking in liquid disinfectants. The soaking cap can be permanently attached to a cable assembly by means of a light weight tether.

#### Receptacles:

AI-PL1200RGN-ILR01  
AI-PL1200RGN-RPM01

#### Plugs:

AI-PL1200RGN-P01

## ASSEMBLY INSTRUCTIONS

For additional information about this, or any other Amphenol Alden product, please contact an Amphenol Alden specialist today.

Phone: 508-427-7000  
Fax: 508-583-0164  
[www.amphenolalden.com](http://www.amphenolalden.com)



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331