



**ANALOG  
DEVICES**

# 2.5 V to 5.5 V, 500 $\mu$ A, Quad Voltage Output 12-Bit DAC in 10-Lead Package

Enhanced Product

**AD5324-EP**

## FEATURES

### Enhanced product features

- Supports defense and aerospace applications (AQEC)
- Military temperature range ( $-55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ )
- Controlled manufacturing baseline
- One assembly/test site
- One fabrication site
- Enhanced product change notification
- Qualification data available on request
- Four buffered 12-Bit DACs in 10-lead MSOP
- S Version:  $\pm 10$  LSB INL
- Low power operation: 500  $\mu\text{A}$  at 3 V, 600  $\mu\text{A}$  at 5 V
- 2.5 V to 5.5 V power supply
- Guaranteed monotonic by design over all codes
- Power-down to 80 nA at 3 V, 200 nA at 5 V
- Double-buffered input logic
- Output range: 0 V to  $V_{\text{REF}}$
- Power-on reset to 0 V
- Simultaneous update of outputs ( $\overline{\text{LDAC}}$  function)
- On-chip, rail-to-rail output buffer amplifiers
- Temperature range  $-55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$

## APPLICATIONS

- Portable battery-powered instruments
- Digital gain and offset adjustment
- Programmable voltage and current sources
- Programmable attenuators
- Industrial process control

## GENERAL DESCRIPTION

The AD5324-EP<sup>1</sup> is a quad 12-bit buffered voltage output digital-to-analog converter (DAC) in a 10-lead MSOP package that operates from a single 2.5 V to 5.5 V supply, consuming 500  $\mu\text{A}$  at 3 V. The on-chip output amplifiers allow rail-to-rail output swing to be achieved with a slew rate of 0.7 V/ $\mu\text{s}$ . A 3-wire serial interface is used; it operates at clock rates up to 30 MHz and is compatible with standard serial peripheral interface (SPI), QSPI™, MICROWIRE™, and DSP interface standards.

The references for the four DACs are derived from one reference pin. The outputs of all DACs can be updated simultaneously using the software  $\overline{\text{LDAC}}$  function. The part incorporates a power-on reset circuit and ensures that the DAC outputs power up to 0 V and remains there until a valid write takes place to the device. The part contains a power-down feature that reduces the current consumption of the device to 200 nA at 5 V (80 nA at 3 V).

The low power consumption of this part in normal operation makes it ideally suited to portable battery-operated equipment. The power consumption is 3 mW at 5 V, and 1.5 mW at 3 V, reducing to 1  $\mu\text{W}$  in power-down mode.

Full details about this enhanced product are available in the [AD5324](#) data sheet, which must be consulted in conjunction with this data sheet.

<sup>1</sup> Protected by U.S. Patent No. 5,969,657.

## FUNCTIONAL BLOCK DIAGRAM

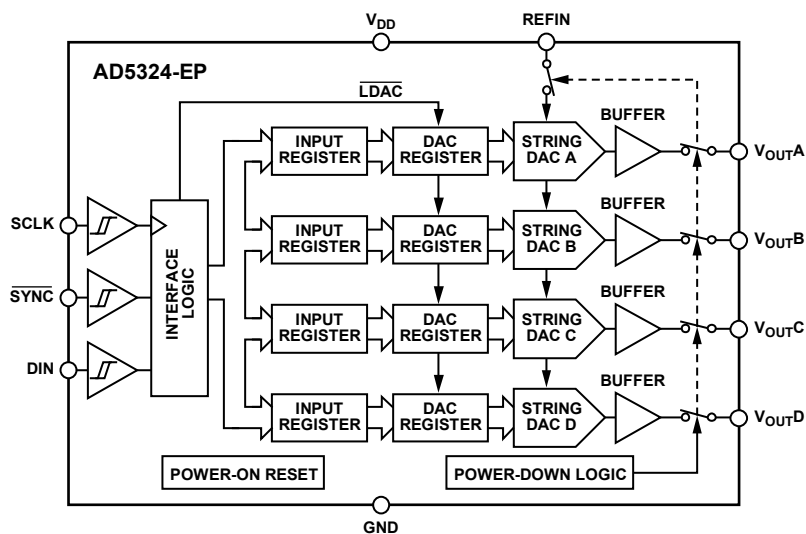


Figure 1.

Rev. A

[Document Feedback](#)

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.  
Tel: 781.329.4700 ©2010–2019 Analog Devices, Inc. All rights reserved.  
[Technical Support](#) [www.analog.com](http://www.analog.com)

TABLE OF CONTENTS

|                                |   |                                                  |    |
|--------------------------------|---|--------------------------------------------------|----|
| Features .....                 | 1 | Timing Characteristics .....                     | 5  |
| Applications .....             | 1 | Absolute Maximum Ratings .....                   | 6  |
| General Description .....      | 1 | ESD Caution.....                                 | 6  |
| Functional Block Diagram ..... | 1 | Pin Configuration and Function Descriptions..... | 7  |
| Revision History .....         | 2 | Typical Performance Characteristics .....        | 8  |
| Specifications.....            | 3 | Outline Dimensions .....                         | 11 |
| AC Characteristics.....        | 4 | Ordering Guide .....                             | 11 |

REVISION HISTORY

6/2019—Rev. 0 to Rev. A

|                                                                                      |    |
|--------------------------------------------------------------------------------------|----|
| Changes to Patent Information.....                                                   | 1  |
| Changes to Offset Error Parameter, Table 1 and Gain Error<br>Parameter, Table 1..... | 3  |
| Changes to Peak Temperature Parameter, Table 4 .....                                 | 6  |
| Updated Outline Dimensions .....                                                     | 11 |

4/2010—Revision 0: Initial Version

## SPECIFICATIONS

$V_{DD} = 2.5\text{ V to }5.5\text{ V}$ ;  $V_{REF} = 2\text{ V}$ ;  $R_L = 2\text{ k}\Omega$  to GND;  $C_L = 200\text{ pF}$  to GND; all specifications  $T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted.

Table 1.

| Parameter                                    | S Version |                  |          | Unit                           | Conditions/Comments                                                                                                                                                                                                                             |
|----------------------------------------------|-----------|------------------|----------|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                              | Min       | Typ              | Max      |                                |                                                                                                                                                                                                                                                 |
| DC PERFORMANCE <sup>1</sup>                  |           |                  |          |                                |                                                                                                                                                                                                                                                 |
| Resolution                                   |           | 12               |          | Bits                           | Guaranteed monotonic by design over all codes<br>See Figure 6 and Figure 8<br>See Figure 6 and Figure 8<br>Lower dead band exists only if offset error is negative<br>$\Delta V_{DD} = \pm 10\%$<br>$R_L = 2\text{ k}\Omega$ to GND or $V_{DD}$ |
| Relative Accuracy                            |           | $\pm 2$          | $\pm 10$ | LSB                            |                                                                                                                                                                                                                                                 |
| Differential Nonlinearity <sup>2</sup>       |           | $\pm 0.2$        | $\pm 1$  | LSB                            |                                                                                                                                                                                                                                                 |
| Offset Error                                 |           | $\pm 0.4$        | $\pm 3$  | % of FSR                       |                                                                                                                                                                                                                                                 |
| Gain Error                                   |           | $\pm 0.15$       | $\pm 1$  | % of FSR                       |                                                                                                                                                                                                                                                 |
| Lower Dead Band                              |           | 20               | 60       | mV                             |                                                                                                                                                                                                                                                 |
| Offset Error Drift <sup>3</sup>              |           | -12              |          | ppm of FSR/ $^{\circ}\text{C}$ |                                                                                                                                                                                                                                                 |
| Gain Error Drift <sup>3</sup>                |           | -5               |          | ppm of FSR/ $^{\circ}\text{C}$ |                                                                                                                                                                                                                                                 |
| DC Power Supply Rejection Ratio <sup>3</sup> |           | -60              |          | dB                             |                                                                                                                                                                                                                                                 |
| DC Crosstalk <sup>3</sup>                    |           | 200              |          | $\mu\text{V}$                  |                                                                                                                                                                                                                                                 |
| DAC REFERENCE INPUTS <sup>3</sup>            |           |                  |          |                                |                                                                                                                                                                                                                                                 |
| $V_{REF}$ Input Range                        | 0.25      |                  | $V_{DD}$ | V                              | Normal operation<br>Power-down mode<br>Frequency = 10 kHz                                                                                                                                                                                       |
| $V_{REF}$ Input Impedance                    | 37        | 45               |          | k $\Omega$                     |                                                                                                                                                                                                                                                 |
|                                              |           | >10              |          | M $\Omega$                     |                                                                                                                                                                                                                                                 |
| Reference Feedthrough                        |           | -90              |          | dB                             |                                                                                                                                                                                                                                                 |
| OUTPUT CHARACTERISTICS <sup>3</sup>          |           |                  |          |                                |                                                                                                                                                                                                                                                 |
| Minimum Output Voltage <sup>4</sup>          |           | 0.001            |          | V                              | Measurement of the minimum and maximum<br>V drive capability of the output amplifier                                                                                                                                                            |
| Maximum Output Voltage <sup>4</sup>          |           | $V_{DD} - 0.001$ |          |                                |                                                                                                                                                                                                                                                 |
| DC Output Impedance                          |           | 0.5              |          | $\Omega$                       | $V_{DD} = 5\text{ V}$<br>$V_{DD} = 3\text{ V}$                                                                                                                                                                                                  |
| Short Circuit Current                        |           | 25               |          | mA                             |                                                                                                                                                                                                                                                 |
|                                              |           | 16               |          | mA                             |                                                                                                                                                                                                                                                 |
| Power-Up Time                                |           | 2.5              |          | $\mu\text{s}$                  | Coming out of power-down mode $V_{DD} = 5\text{ V}$                                                                                                                                                                                             |
|                                              |           | 5                |          | $\mu\text{s}$                  | Coming out of power-down mode $V_{DD} = 3\text{ V}$                                                                                                                                                                                             |
| LOGIC INPUTS <sup>3</sup>                    |           |                  |          |                                |                                                                                                                                                                                                                                                 |
| Input Current                                |           |                  | $\pm 1$  | $\mu\text{A}$                  | $V_{DD} = 5\text{ V} \pm 10\%$<br>$V_{DD} = 3\text{ V} \pm 10\%$<br>$V_{DD} = 2.5\text{ V}$<br>$V_{DD} = 5\text{ V} \pm 10\%$<br>$V_{DD} = 3\text{ V} \pm 10\%$<br>$V_{DD} = 2.5\text{ V}$                                                      |
| $V_{IL}$ , Input Low Voltage                 |           |                  | 0.8      | V                              |                                                                                                                                                                                                                                                 |
|                                              |           |                  | 0.6      | V                              |                                                                                                                                                                                                                                                 |
|                                              |           |                  | 0.5      | V                              |                                                                                                                                                                                                                                                 |
| $V_{IH}$ , Input High Voltage                | 2.4       |                  |          | V                              |                                                                                                                                                                                                                                                 |
|                                              | 2.1       |                  |          | V                              |                                                                                                                                                                                                                                                 |
|                                              | 2.0       |                  |          | V                              |                                                                                                                                                                                                                                                 |
| Pin Capacitance                              |           | 3                |          | pF                             |                                                                                                                                                                                                                                                 |
| POWER REQUIREMENTS                           |           |                  |          |                                |                                                                                                                                                                                                                                                 |
| $V_{DD}$                                     | 2.5       |                  | 5.5      | V                              | $V_{IH} = V_{DD}$ and $V_{IL} = \text{GND}$<br>$V_{IH} = V_{DD}$ and $V_{IL} = \text{GND}$                                                                                                                                                      |
| $I_{DD}$ (Normal Mode) <sup>5</sup>          |           |                  |          |                                |                                                                                                                                                                                                                                                 |
| $V_{DD} = 4.5\text{ V to }5.5\text{ V}$      |           | 600              | 900      | $\mu\text{A}$                  | $V_{IH} = V_{DD}$ and $V_{IL} = \text{GND}$<br>$V_{IH} = V_{DD}$ and $V_{IL} = \text{GND}$                                                                                                                                                      |
| $V_{DD} = 2.5\text{ V to }3.6\text{ V}$      |           | 500              | 700      | $\mu\text{A}$                  |                                                                                                                                                                                                                                                 |
| $I_{DD}$ (Power-Down Mode)                   |           |                  |          |                                | $V_{IH} = V_{DD}$ and $V_{IL} = \text{GND}$<br>$V_{IH} = V_{DD}$ and $V_{IL} = \text{GND}$                                                                                                                                                      |
| $V_{DD} = 4.5\text{ V to }5.5\text{ V}$      |           | 0.2              | 1        | $\mu\text{A}$                  |                                                                                                                                                                                                                                                 |
| $V_{DD} = 2.5\text{ V to }3.6\text{ V}$      |           | 0.08             | 1        | $\mu\text{A}$                  |                                                                                                                                                                                                                                                 |

<sup>1</sup> DC specifications tested with the outputs unloaded.

<sup>2</sup> Linearity is tested using a reduced code range: Code 115 to Code 3981.

<sup>3</sup> Guaranteed by design and characterization, not production tested.

<sup>4</sup> For the amplifier output to reach the minimum voltage, offset error must be negative. For the amplifier output to reach the maximum voltage,  $V_{REF} = V_{DD}$  and offset plus gain error must be positive.

<sup>5</sup>  $I_{DD}$  specification is valid for all DAC codes; interface inactive; all DACs active; load currents excluded.

**AC CHARACTERISTICS**

$V_{DD} = 2.5 \text{ V}$  to  $5.5 \text{ V}$ ;  $R_L = 2 \text{ k}\Omega$  to GND;  $C_L = 200 \text{ pF}$  to GND; all specifications  $T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted.

**Table 2.**

| Parameter <sup>1</sup>              | S Version <sup>2</sup> |     |     | Unit                       | Conditions/Comments                                                                                    |
|-------------------------------------|------------------------|-----|-----|----------------------------|--------------------------------------------------------------------------------------------------------|
|                                     | Min                    | Typ | Max |                            |                                                                                                        |
| Output Voltage Settling Time        |                        | 8   | 10  | $\mu\text{s}$              | $V_{REF} = V_{DD} = 5 \text{ V}$<br>$\frac{1}{4}$ scale to $\frac{3}{4}$ scale change (0x400 to 0xC00) |
| Slew Rate                           |                        | 0.7 |     | $\text{V}/\mu\text{s}$     |                                                                                                        |
| Major Code Transition Glitch Energy |                        | 12  |     | $\text{nV}\cdot\text{sec}$ | 1 LSB change around major carry                                                                        |
| Digital Feedthrough                 |                        | 1   |     | $\text{nV}\cdot\text{sec}$ |                                                                                                        |
| Digital Crosstalk                   |                        | 1   |     | $\text{nV}\cdot\text{sec}$ |                                                                                                        |
| DAC-to-DAC Crosstalk                |                        | 3   |     | $\text{nV}\cdot\text{sec}$ |                                                                                                        |
| Multiplying Bandwidth               |                        | 200 |     | $\text{kHz}$               | $V_{REF} = 2 \text{ V} \pm 0.1 \text{ V p-p}$                                                          |
| Total Harmonic Distortion           |                        | -70 |     | $\text{dB}$                | $V_{REF} = 2.5 \text{ V} \pm 0.1 \text{ V p-p}$ ; frequency = 10 kHz                                   |

<sup>1</sup> Guaranteed by design and characterization, not production tested.

<sup>2</sup> Temperature range (S Version):  $-55^\circ\text{C}$  to  $+125^\circ\text{C}$ ; typical at  $+25^\circ\text{C}$ .

**TIMING CHARACTERISTICS**

$V_{DD} = 2.5\text{ V to }5.5\text{ V}$ ; all specifications  $T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted.

**Table 3.**

| Parameter <sup>1, 2, 3</sup> | Limit at $T_{MIN}$ , $T_{MAX}$          |                                         | Unit   | Conditions/Comments                                       |
|------------------------------|-----------------------------------------|-----------------------------------------|--------|-----------------------------------------------------------|
|                              | $V_{DD} = 2.5\text{ V to }3.6\text{ V}$ | $V_{DD} = 3.6\text{ V to }5.5\text{ V}$ |        |                                                           |
| $t_1$                        | 40                                      | 33                                      | ns min | SCLK cycle time                                           |
| $t_2$                        | 16                                      | 13                                      | ns min | SCLK high time                                            |
| $t_3$                        | 16                                      | 13                                      | ns min | SCLK low time                                             |
| $t_4$                        | 16                                      | 13                                      | ns min | $\overline{\text{SYNC}}$ to SCLK falling edge setup time  |
| $t_5$                        | 5                                       | 5                                       | ns min | Data setup time                                           |
| $t_6$                        | 4.5                                     | 4.5                                     | ns min | Data hold time                                            |
| $t_7$                        | 0                                       | 0                                       | ns min | SCLK falling edge to $\overline{\text{SYNC}}$ rising edge |
| $t_8$                        | 80                                      | 33                                      | ns min | Minimum $\overline{\text{SYNC}}$ high time                |

<sup>1</sup> Guaranteed by design and characterization, not production tested.

<sup>2</sup> All input signals are specified with  $t_r = t_f = 5\text{ ns}$  (10% to 90% of  $V_{DD}$ ) and timed from a voltage level of  $(V_{IL} + V_{IH})/2$ .

<sup>3</sup> See Figure 2.

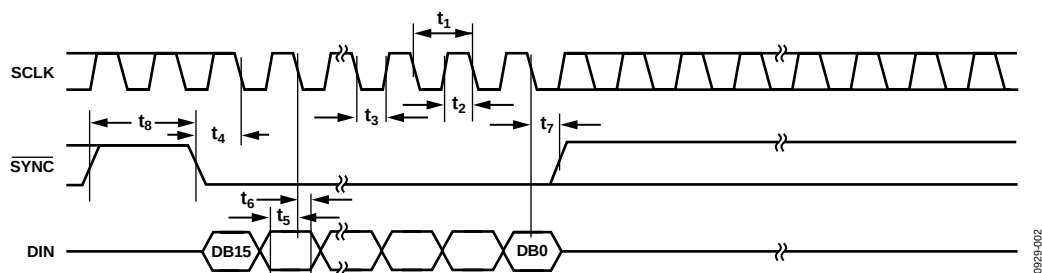


Figure 2. Serial Interface Timing Diagram

00929-002

## ABSOLUTE MAXIMUM RATINGS

$T_A = 25^\circ\text{C}$ , unless otherwise noted.

Table 4.

| Parameter <sup>1</sup>               | Rating                                  |
|--------------------------------------|-----------------------------------------|
| $V_{DD}$ to GND                      | –0.3 V to +7 V                          |
| Digital Input Voltage to GND         | –0.3 V to $V_{DD} + 0.3$ V              |
| Reference Input Voltage to GND       | –0.3 V to $V_{DD} + 0.3$ V              |
| $V_{OUTA}$ through $V_{OUTD}$ to GND | –0.3 V to $V_{DD} + 0.3$ V              |
| Operating Temperature Range          |                                         |
| Industrial (EP Version)              | –55°C to +125°C                         |
| Storage Temperature Range            | –65°C to +150°C                         |
| Junction Temperature ( $T_J$ max)    | 150°C                                   |
| 10-Lead MSOP                         |                                         |
| Power Dissipation                    | $(T_J \text{ max} - T_A) / \theta_{JA}$ |
| $\theta_{JA}$ Thermal Impedance      | 206°C/W                                 |
| $\theta_{JC}$ Thermal Impedance      | 44°C/W                                  |
| Reflow Soldering                     |                                         |
| Peak Temperature                     | 260°C                                   |
| Time at Peak Temperature             | 10 sec to 40 sec                        |

<sup>1</sup> Transient currents of up to 100 mA do not cause SCR latch-up.

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.

### ESD CAUTION



**ESD (electrostatic discharge) sensitive device.** Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

## PIN CONFIGURATION AND FUNCTION DESCRIPTIONS




Figure 3. MSOP Pin Configuration

Table 5. Pin Function Descriptions

| Pin No. | Mnemonic                 | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1       | V <sub>DD</sub>          | Power Supply Input. This part can be operated from 2.5 V to 5.5 V and the supply can be decoupled to GND.                                                                                                                                                                                                                                                                                                                                                    |
| 2       | V <sub>OUTA</sub>        | Buffered Analog Output Voltage from DAC A. The output amplifier has rail-to-rail operation.                                                                                                                                                                                                                                                                                                                                                                  |
| 3       | V <sub>OUTB</sub>        | Buffered Analog Output Voltage from DAC B. The output amplifier has rail-to-rail operation.                                                                                                                                                                                                                                                                                                                                                                  |
| 4       | V <sub>OUTC</sub>        | Buffered Analog Output Voltage from DAC C. The output amplifier has rail-to-rail operation.                                                                                                                                                                                                                                                                                                                                                                  |
| 5       | REFIN                    | Reference Input Pin for All Four DACs. It has an input range from 0.25 V to V <sub>DD</sub> .                                                                                                                                                                                                                                                                                                                                                                |
| 6       | V <sub>OUTD</sub>        | Buffered Analog Output Voltage from DAC D. The output amplifier has rail-to-rail operation.                                                                                                                                                                                                                                                                                                                                                                  |
| 7       | GND                      | Ground Reference Point for All Circuitry on the Part.                                                                                                                                                                                                                                                                                                                                                                                                        |
| 8       | DIN                      | Serial Data Input. This device has a 16-bit shift register. Data is clocked into the register on the falling edge of the serial clock input. The DIN input buffer is powered down after each write cycle.                                                                                                                                                                                                                                                    |
| 9       | SCLK                     | Serial Clock Input. Data is clocked into the input shift register on the falling edge of the serial clock input. Data can be transferred at clock speeds up to 30 MHz. The SCLK input buffer is powered down after each write cycle.                                                                                                                                                                                                                         |
| 10      | $\overline{\text{SYNC}}$ | Active Low Control Input. This is the frame synchronization signal for the input data. When $\overline{\text{SYNC}}$ goes low, it enables the input shift register and data is transferred in on the falling edges of the following 16 clocks. If $\overline{\text{SYNC}}$ is taken high before the 16 <sup>th</sup> falling edge of SCLK, the rising edge of $\overline{\text{SYNC}}$ acts as an interrupt and the write sequence is ignored by the device. |

## TYPICAL PERFORMANCE CHARACTERISTICS

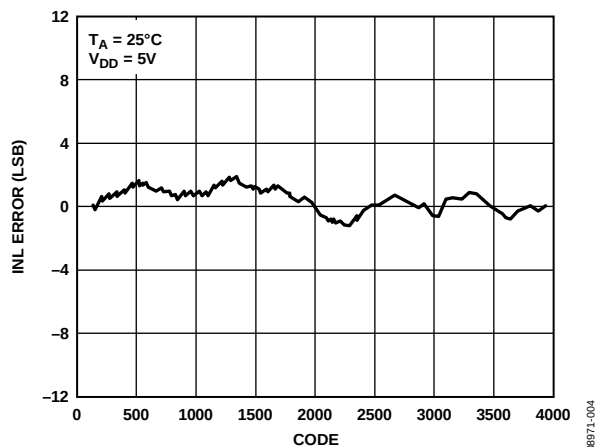


Figure 4. Typical Integral Nonlinearity (INL) Plot

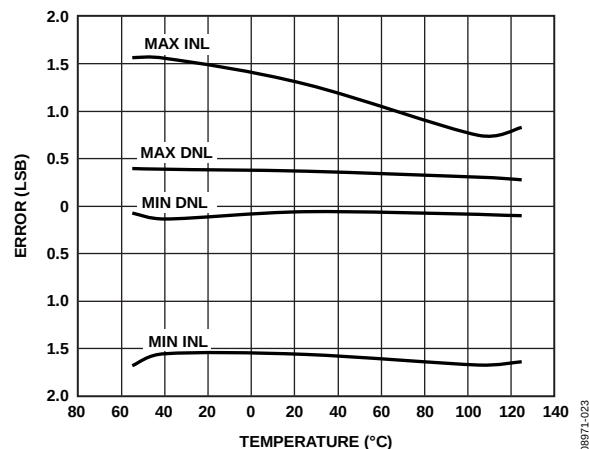


Figure 7. INL and DNL Error vs. Temperature

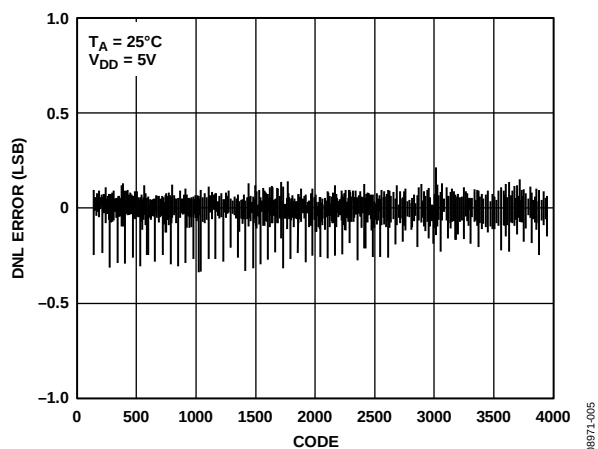


Figure 5. Typical Differential Nonlinearity (DNL) Plot

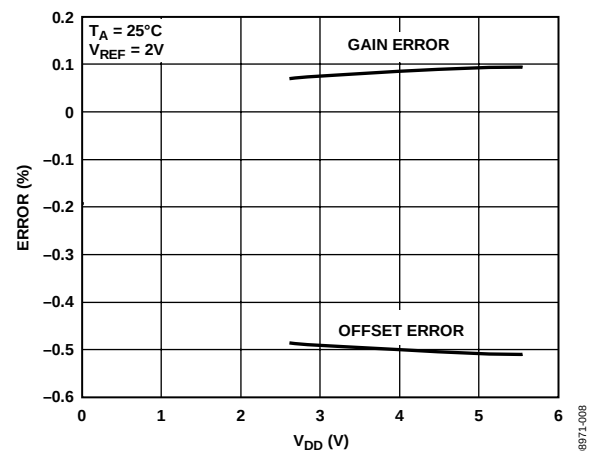
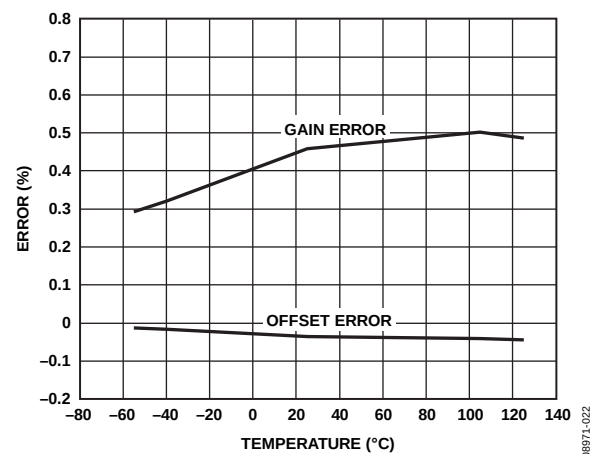
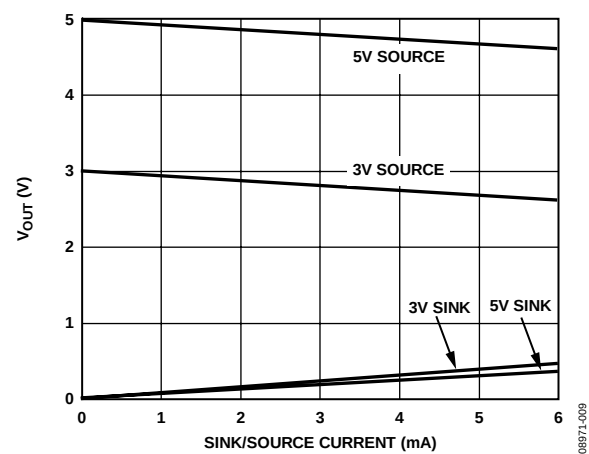
Figure 8. Offset Error and Gain Error vs.  $V_{DD}$ 

Figure 6. Offset Error and Gain Error vs. Temperature

Figure 9.  $V_{OUT}$  Source and Sink Current Capability



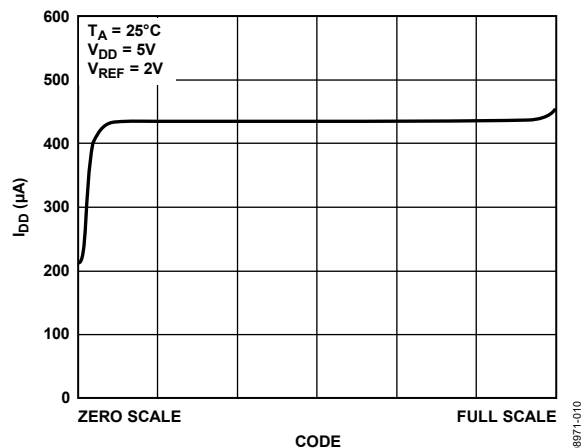


Figure 10. Supply Current vs. DAC Code

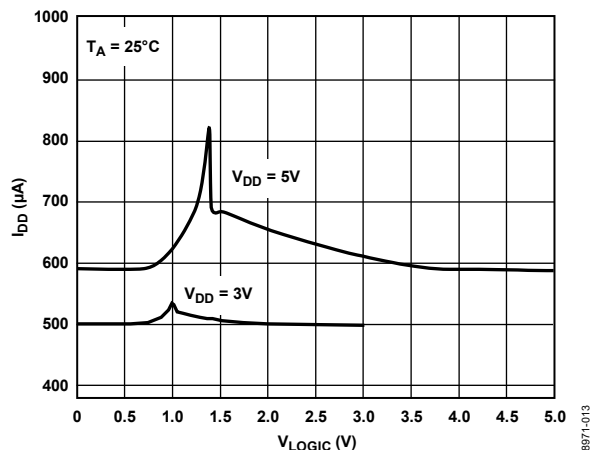


Figure 13. Supply Current vs. Logic Input Voltage

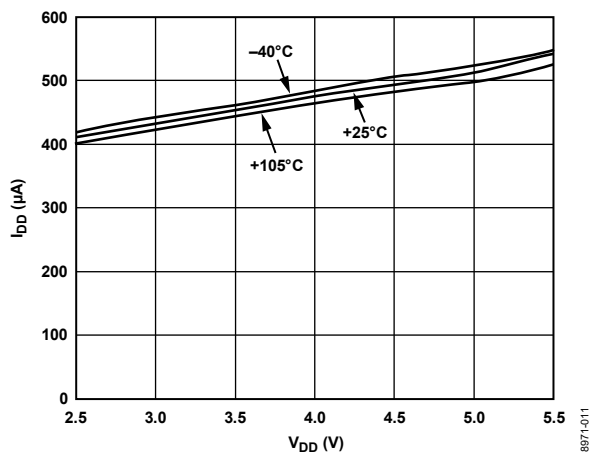


Figure 11. Supply Current vs. Supply Voltage

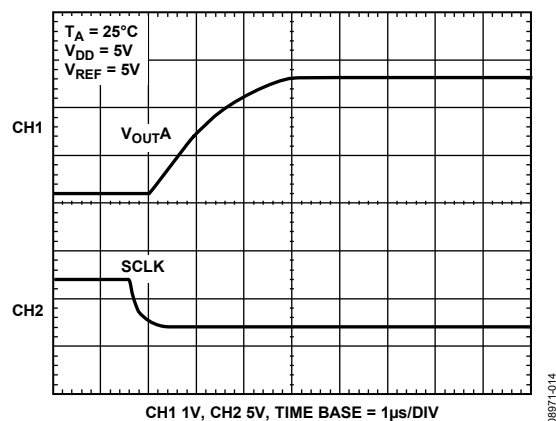


Figure 14. Half-Scale Settling (1/4 to 3/4 Scale Code Change)

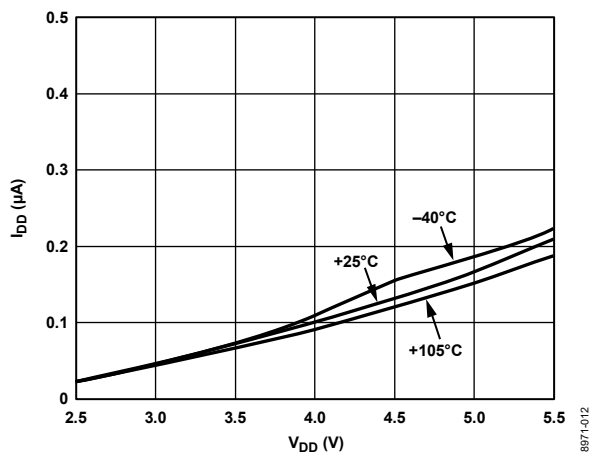


Figure 12. Power-Down Current vs. Supply Voltage

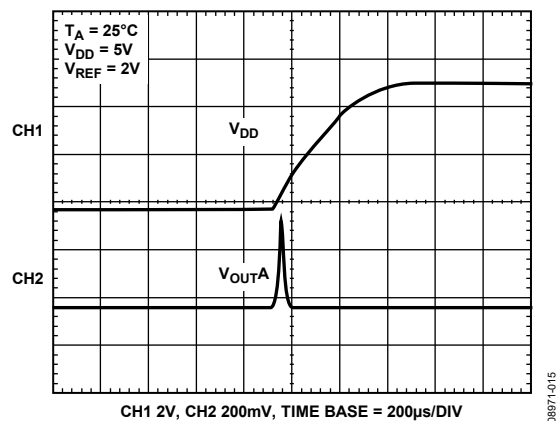


Figure 15. Power-On Reset to 0V

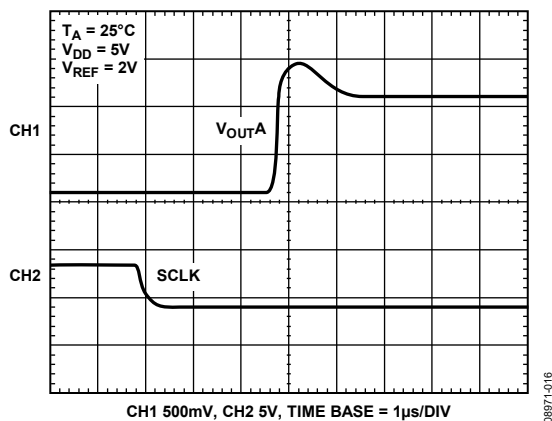


Figure 16. Exiting Power-Down to Midscale

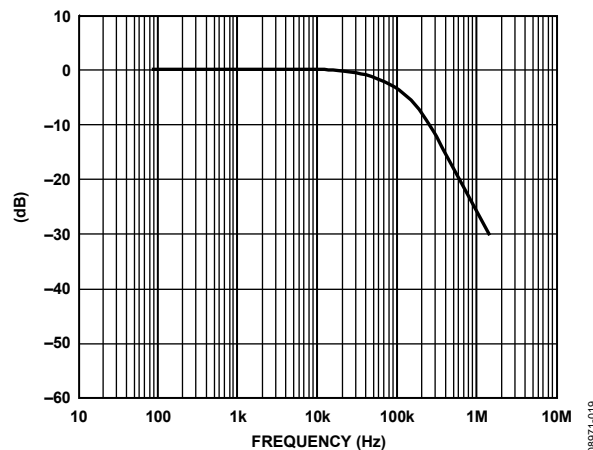


Figure 19. Multiplying Bandwidth (Small-Signal Frequency Response)




Figure 17.  $I_{DD}$  Histogram with  $V_{DD} = 3V$  and  $V_{DD} = 5V$ Figure 20. Full-Scale Error vs.  $V_{REF}$ 

Figure 18. Major-Code Transition Glitch Energy





Figure 21. DAC-to-DAC Crosstalk

## OUTLINE DIMENSIONS

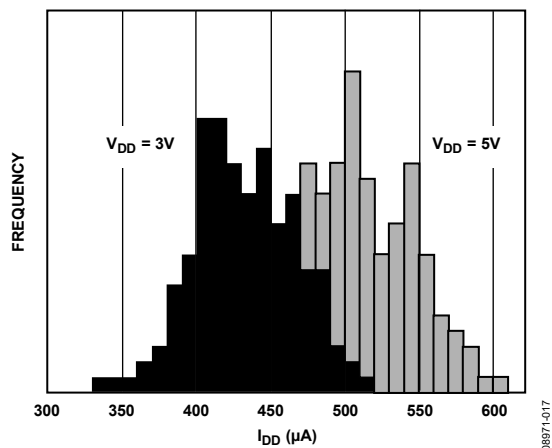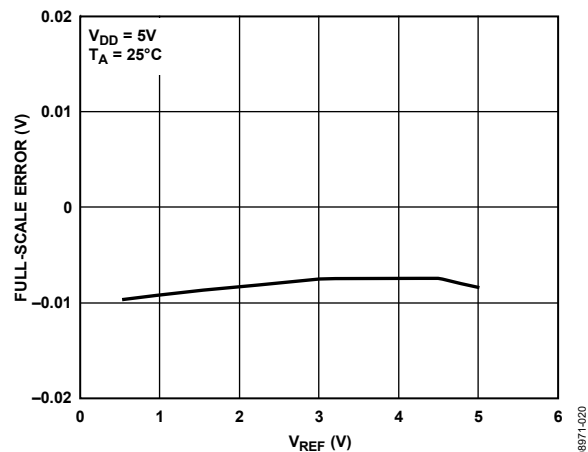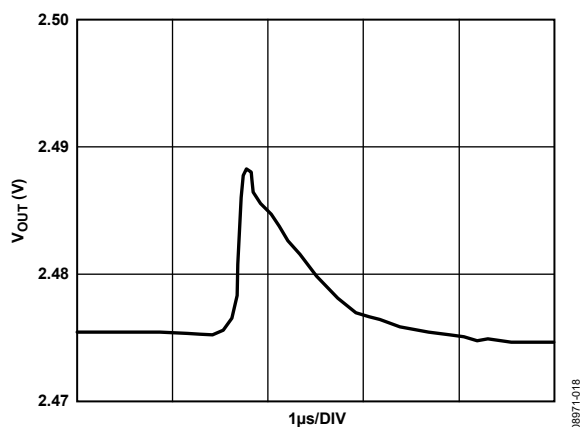

COMPLIANT TO JEDEC STANDARDS MO-187-BA  
 Figure 22. 10-Lead Mini Small Outline Package [MSOP]  
 (RM-10)  
 Dimensions shown in millimeters

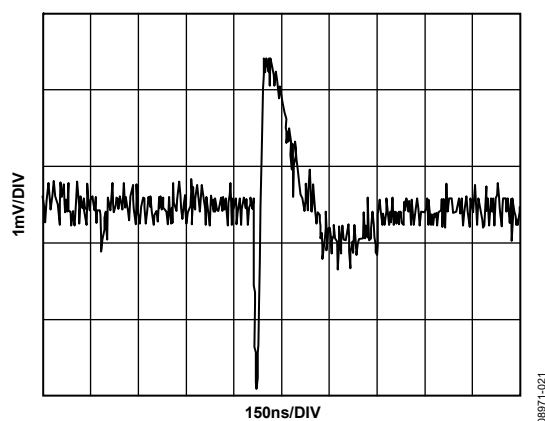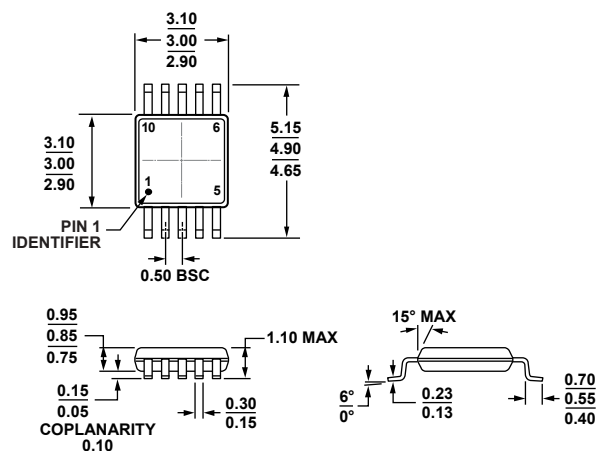091709-A

## ORDERING GUIDE

| Model <sup>1</sup> | Temperature Range | Package Description                       | Package Option | Marking Code |
|--------------------|-------------------|-------------------------------------------|----------------|--------------|
| AD5324SRMZ-EP-RL7  | -55°C to +125°C   | 10-Lead Mini Small Outline Package (MSOP) | RM-10          | DFT          |

<sup>1</sup> Z = RoHS Compliant Part.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331