

IN145403 IN145404 IN145405 IN145408


DRIVERS/RECEIVERS RS-232-E

These devices are silicon gate CMOS ICs that combine both the transmitter and receiver to fulfill the electrical specifications of EIA Standard 232-E and CCITT V.28. The drivers feature true TTL input compatibility, slew rate limiting outputs, 300 Ω power-off source impedance, and output typically switching to within 25% of the supply rails. The receivers can handle up to $\pm 25V$ while presenting 3 to 7 k Ω impedance. Hysteresis in the receivers aid in the reception of noisy signals. By combining both drivers and receivers in a single CMOS chip, these devices provide efficient, low-power solutions for both EIA-232-E and V.28 applications. These devices offer the following performance features:


DRIVERS	RECEIVERS
<ul style="list-style-type: none"> • ± 5 to ± 12 V Supply Range • 300 Ω Power-Off Source Impedance • Output Current Limiting • TTL and CMOS Compatible Inputs • Driver Slew Rate Range Limited to 30 V/μs Maximum 	<ul style="list-style-type: none"> • $\pm 25V$ Input Range • 3 to 7 kΩ Input Impedance • 0.8V of Hysteresis for Enhanced Noise Immunity • TTL and CMOS Compatible Outputs • Available Driver/Receiver Combinations

Device	Drivers	Receivers	Figure	No. of Pins
IN145403	3	5	1	20
IN145404	4	4	2	20
IN145405	5	3	3	20
IN145408	5	5	4	24


IN145403
3 DRIVERS/5 RECEIVERS

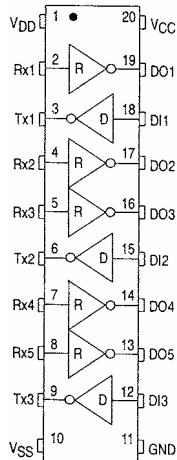


IN145404
4 DRIVERS/4 RECEIVERS

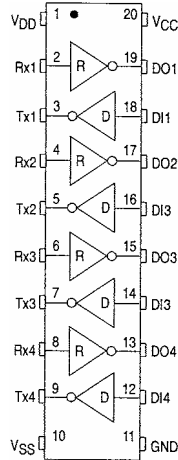

IN145405
5 DRIVERS/3 RECEIVERS

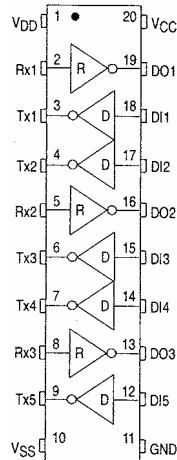


IN145408
5 DRIVERS/5 RECEIVERS

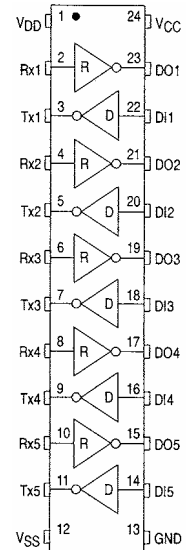

IN145403 IN145404 IN145405 IN145408

FUNCTIONAL DIAGRAM

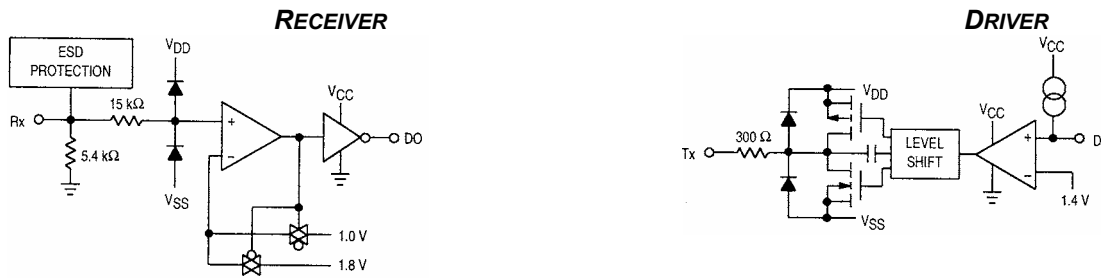

ABSOLUTE MAXIMUM RATINGS (Voltages referenced to GND, except where noted)

Rating	Symbol	Value	Unit
DC Supply Voltage ($V_{DD} \geq V_{CC}$)	V_{DD}	-0.5 to +13.5	V
	V_{SS}	+0.5 to -13.5	
	V_{CC}	-0.5 to +6.0	
Input Voltage Range Rx1 - Rxn DI1 - DIIn	V_{IR}	$V_{GG} - 15 \text{ to } V_{DO} + 15$ $0.5 \text{ to } V_{CC} + 15$	V
DC Current Drain per Pin	I	± 00	mA
Power Dissipation	P_D	1	W
Operating Temperature Range	T_A	-40 to +85	$^{\circ}\text{C}$
Storage Temperature Range	T_{stg}	-85 to +150	$^{\circ}\text{C}$

This device contains circuitry to protect the inputs and outputs against damage due to high static voltages or electric fields; however, it is advised that normal precautions be taken to avoid applications of any voltage higher than maximum rated voltages to this high impedance circuit.

For proper operation it is recommended that V_{out} and V_{in} be constrained to the ranges described as follows: Digital I/O:

Driver Inputs (DI):

$(GND \leq V_{DI} \leq V_{CC})$

Receiver Outputs (DO):

$(GND \leq V_{DO} \leq V_{CC})$

EIA-232 I/O: Driver Outputs (Tx):

$(V_{SS} \leq V_{Tx1-Txn} \leq V_{DD})$

Receiver Inputs (Rx):

$(V_{SS} - 15V \leq V_{Rx1-Rxn} \leq V_{DD} + 15V)$

Reliability of operation is enhanced if unused outputs are tied off to an appropriate logic voltage level (e.g., either GND or V_{CC} for DI, and GND for Rx).

DC ELECTRICAL CHARACTERISTICS (All polarities referenced to GND=0V, $T_A = -40$ to $+85^{\circ}\text{C}$)

Parameter	Symbol	Min	Typ	Max	Unit
DC Supply Voltage	V_{DD}	4.5	5 to 12	13.2	V
	V_{SS}	-4.5	-5 to -12	-13.2	
	V_{CC}	4.5	5	5.5	
Quiescent Supply Current (Outputs Unloaded, Inputs Low)	I_{DD}	-	425	635	nA
	I_{SS}	-	-400	-600	
	I_{CC}	-	110	200	
	$V_{DD} = +12V$ $V_{SS} = -12V$ $V_{CC} = +5V$				

IN145403 IN145404 IN145405 IN145408

RECEIVER ELECTRICAL SPECIFICATIONS (Voltage polarities referenced to GND=0V, $V_{DD}=+12V$, $V_{SS}=-12V$, $T_A=-40$ to $+85^\circ C$, $V_{CC}=+5V \pm 10\%$)

Characteristic	Symbol	Min	Typ	Max	Unit
Input Turn-On Threshold Rx1 - Rxn $V_{DD}=V_{OL}$	V_{on}	1.35	1.8	2.35	V
Input Turn-Off Threshold Rx1 - Rxn $V_{DD}=V_{OH}$	V_{off}	0.75	1	1.25	V
Input Threshold Hysteresis $\Delta=V_{on}-V_{off}$	V_{hys}	0.6	0.8	—	V
Input Resistance ($V_{SS}=-15V$) $\leq V_{Rx1}$ - $R_{Xn} \leq (V_{DD}+15V)$	R_{in}	3	5.4	7	k Ω
High Level Output Voltage $V_{Rx}=-3$ to $-25V^*$ (D01-D0n) $I_{out}=-20 \mu A$ $I_{out}=-1.0mA$	V_{OH}	4.9 3.8	4.9 4.3	- -	V
Low Level Output Voltage $V_{Rx}=+3$ to $+25V$ (D01 - D0n) $I_{out}=+2mA$ $I_{out}=+4 mA$	V_{OL}	- -	0.02 0.5	0.5 0.7	V

* This is the range of input voltages as specified by EIA-232-E to cause a receiver to be in the high or low.

DRIVER ELECTRICAL SPECIFICATIONS (Voltage Polarities Referenced to GND =0V, $V_{DD}=+12V$, $V_{SS}=-12V$, $T_A=-40$ to $+85^\circ C$, $V_{CC}=+5V \pm 10\%$)

Characteristic	Symbol	Min	Typ	Max	Unit
Digital Input Voltage Logic 0 Logic 1	DII-DIn V_{IL} V_{IH}	- 2	- -	0.8 -	V
Input Current $V_{DI}=GND$ $V_{DI}=V_{CC}$	DII - DIn I_{IL} I_{IH}	- -	7 -	- ± 1.0	nA
Output High Voltage $V_{DI}=Logic\ 0$, $R_L=3k\Omega$ $V_{DD}=+5.0V$, $V_{SS}=-5.0V$ $V_{DD}=+6.0V$, $V_{SS}=-6.0V$ $V_{DD}=+12.0V$, $V_{SS}=-12.0V$	Txl-Txn V_{OH}	3.5 4.3 9.2	3.9 4.7 9.5	- - -	V
Output Low Voltage* $V_{DI}=Logic\ 1$, $R_L=3k\Omega$ $V_{DD}=+5.0V$, $V_{SS}=-5.0V$ $V_{DD}=+6.0V$, $V_{SS}=-6.0V$ $V_{DD}=+12.0V$, $V_{SS}=-12.0V$	Txl - Txn V_{OL}	-4 -4.5 -10	-4.3 -5.2 -10.3	- - -	V
Output Short Circuit Current $V_{DD}=+12V$, $V_{SS}=-12V$ Tx Shorted to GND Tx Shorted to $\pm 15V$	Txl-Txn I_{SC}	-	$\pm 22 \pm 60$	$\pm 60 \pm 100$	mA

* Voltage specifications are in terms of absolute values.

SWITCHING CHARACTERISTICS ($V_{CC}=+5V \pm 10\%$, $V_{DD}=+12V$, $V_{SS}=-12V$, $T_A=-40$ to $+85^\circ C$; See Figures 2 and 3)

Characteristic	Symbol	Min	Typ	Max	Unit
Drivers					
Propagation Delay Time Tx Low-to-High $R_L=3k\Omega$, $C_L=50 pF$ High-to-Low $R_L=3k\Omega$, $C_L=50pF$	t_{PLH} t_{PHL}	- -	500 700	1000 1000	ns
Output Slew Rate Minimum Load $R_L=7k\Omega$, $C_L=0 pF$ ($V_{DD}=6$ to $12V$, $V_{SS}=-6$ to $-12V$) Maximum Load $R_L=3k\Omega$, $C_L=2500 pF$ ($V_{DD}=12V$, $V_{SS}=-12V$, $V_{CC}=5V$)	SR	- 4	± 6 -	± 30 -	V/ps
Receivers ($C_L=50 pF$)					
Propagation Delay Time Low-to-High High-to-Low	t_{PLH} t_{PHL}	— -	360 130	610 610	ns
Output Rise Time	t_r	-	250	400	ns
Output Fall Time	t_f	-	40	100	ns



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331