



Temperature Compensated Zener Reference Diodes

Qualified per MIL-PRF-19500/156

Qualified Levels:
JAN, JANTX,
JANTXV and JANS

DESCRIPTION

The popular 1N935BUR-1 through 1N938BUR-1 series of Zero-TC (Temperature Compensated) reference diodes provides a selection of 9.0 V nominal voltages and temperature coefficients to as low as 0.001 %/°C for minimal voltage change with temperature when operated at 7.5 mA. These glass surface mount DO-213AA reference diodes are also available in JAN, JANTX, JANTXV and JANS military qualifications. For commercial applications it is also available as RoHS compliant (not applicable to military).

Important: For the latest information, visit our website <http://www.microsemi.com>.

FEATURES

- Surface mount equivalent of JEDEC registered 1N935 through 1N938 number series.
- Standard reference voltage of 9.0V +/- 5%.
- Temperature compensated.
- Internal metallurgical bond.
- Double plug construction.
- JAN, JANTX, JANTXV and JANS qualification are available per MIL-PRF-19500/156.
- RoHS compliant versions available (commercial grade only).


APPLICATIONS / BENEFITS

- Provides minimal voltage changes over a broad temperature range.
- For instrumentation and other circuit designs requiring a stable voltage reference.
- Maximum temperature coefficient selections available from 0.01 %/°C to 0.001 %/°C.
- MELF surface mount.
- Non-sensitive to ESD per MIL-STD-750 method 1020.

MAXIMUM RATINGS @ T_A = 25 °C unless otherwise stated

Parameters/Test Conditions	Symbol	Value	Unit
Junction and Storage temperature	T _J and T _{STG}	-65 to +175	°C
Power Dissipation ⁽¹⁾	P _D	500	mW
Maximum Zener Current	I _{ZM}	50	mA
Solder Pad Temperatures at 10 s	T _{SP}	260	°C

Notes: 1. @ T_{EC} = 50 °C (see [figure 1](#)). For optimum voltage-temperature stability, I_Z = 7.5 mA (less than 50 mW in dissipated power). Derate at 3.33 mW/°C above T_A = +25 °C.



**DO-213AA MELF
Package**

Also available in:

**DO-35 (DO-204AH)
package**
(axial-leaded)

 [1N935B-1 – 1N938B-1](#)

MSC – Lawrence

6 Lake Street,
Lawrence, MA 01841
1-800-446-1158
Tel: (978) 620-2600
Fax: (978) 689-0803

MSC – Ireland

Gort Road Business Park,
Ennis, Co. Clare, Ireland
Tel: +353 (0) 65 6840044
Fax: +353 (0) 65 6822298


Website:

www.microsemi.com

MECHANICAL and PACKAGING

- CASE: Hermetically sealed glass case package.
- TERMINALS: Tin/lead plated or RoHS compliant matte-tin (on commercial grade only) over copper clad steel. Solderable per MIL-STD-750, method 2026.
- POLARITY: Cathode end is banded.
- MOUNTING: The axial coefficient of expansion (COE) of this device is approximately +6PPM/°C. The COE of the mounting surface system should be selected to provide a suitable match with this device.
- MARKING: Part number.
- TAPE & REEL option: Standard per EIA-296. Consult factory for quantities.
- WEIGHT: Approximately 0.04 grams.
- See [Package Dimensions](#) on last page.

PART NOMENCLATURE

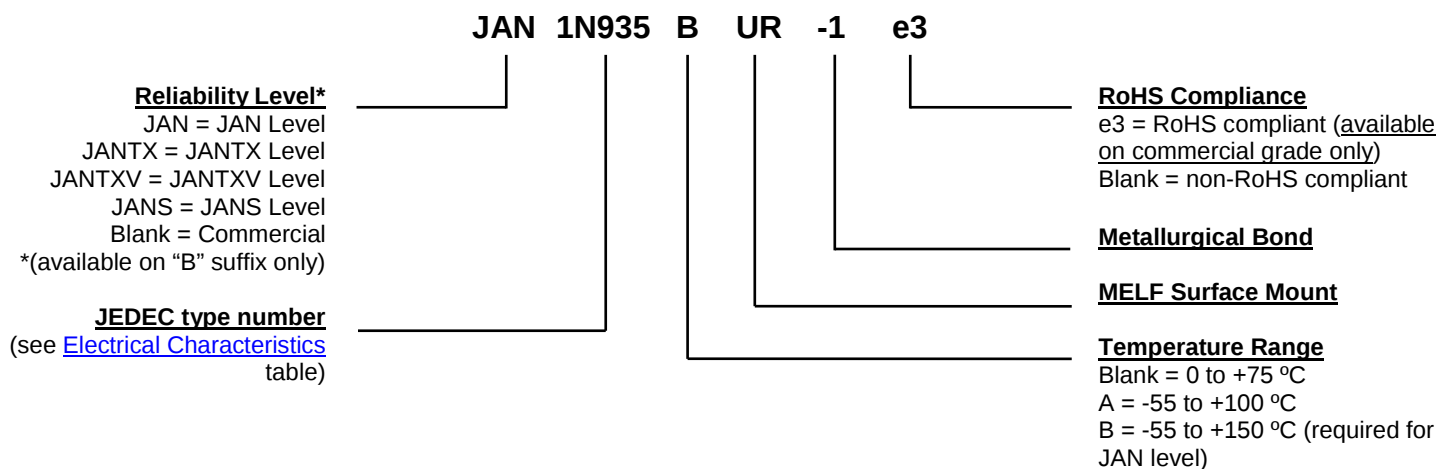

SYMBOLS & DEFINITIONS

Symbol	Definition
I_{ZM}	Maximum Zener Current: The maximum rated dc current for the specified power rating.
I_Z, I_{ZT}, I_{ZK}	Regulator Current: The dc regulator current (I_Z), at a specified test point (I_{ZT}), near breakdown knee (I_{ZK}).
V_Z	Zener Voltage: The Zener voltage the device will exhibit at a specified current (I_Z) in its breakdown region.
Z_{ZT} or Z_{ZK}	Dynamic Impedance: The small signal impedance of the diode when biased to operate in its breakdown region at a specified rms current modulation (typically 10% of I_{ZT} or I_{ZK}) and superimposed on I_{ZT} or I_{ZK} respectively.

ELECTRICAL CHARACTERISTICS @ 25 °C unless otherwise specified

MIL-PRF-19500/156	MSC TYPE NUMBER (Note 1)	ZENER VOLTAGE $V_Z @ I_{ZT}$	ZENER TEST CURRENT I_{ZT}	MAXIMUM ZENER IMPEDANCE (Note 2) Z_{ZT}	VOLTAGE TEMPERATURE STABILITY ΔV_{ZT} MAXIMUM (Note 3)	TEMPERATURE RANGE	EFFECTIVE TEMPERATURE COEFFICIENT α_{VZ}
		Volts	mA	Ohms	mV	°C	% / °C
1N935BUR-1	CDLL935	8.55 – 9.45	7.5	20	67	0 to +75	0.01
	CDLL935A	8.55 – 9.45	7.5	20	139	-55 to +100	0.01
	CDLL935B	8.55 – 9.45	7.5	20	184	-55 to +150	0.01
	CDLL936	8.55 – 9.45	7.5	20	34	0 to +75	0.005
	CDLL936A	8.55 – 9.45	7.5	20	70	-55 to +100	0.005
	CDLL936B	8.55 – 9.45	7.5	20	92	-55 to +150	0.005
1N937BUR-1	CDLL937	8.55 – 9.45	7.5	20	13	0 to +75	0.002
	CDLL937A	8.55 – 9.45	7.5	20	28	-55 to +100	0.002
	CDLL937B	8.55 – 9.45	7.5	20	37	-55 to +150	0.002
1N938BUR-1	CDLL938	8.55 – 9.45	7.5	20	6.7	0 to +75	0.001
	CDLL938A	8.55 – 9.45	7.5	20	13.9	-55 to +100	0.001
	CDLL938B	8.55 – 9.45	7.5	20	19	-55 to +150	0.001

NOTE 1: Microsemi CDLL prefixed numbers are commercial use only. For high-reliability applications JAN prefixed 1N numbers must be selected along with the B suffix.

NOTE 2: Zener impedance is derived by superimposing on I_{ZT} A 60 Hz rms ac current equal to 10% of I_{ZT} .

NOTE 3: The maximum allowable change observed over the entire temperature range i.e., the diode voltage will not exceed the specified mV at any discrete temperature between the established limits, per JEDEC standard No. 5.

GRAPHS

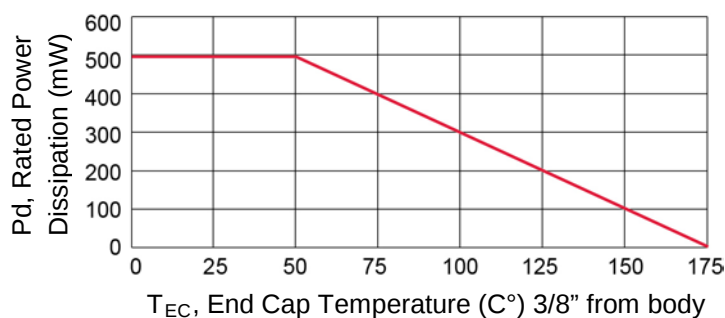


FIGURE 1
Power Derating Curve

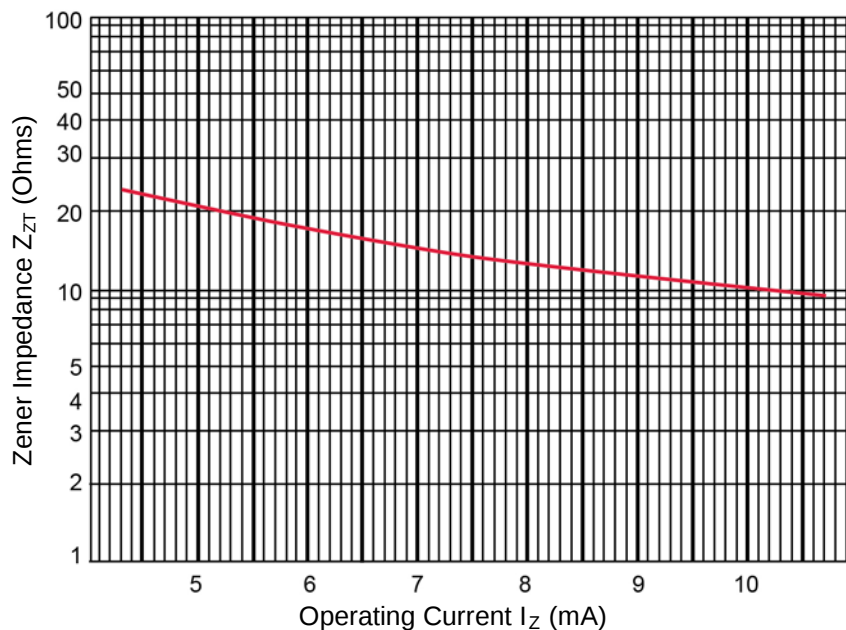


FIGURE 2
Zener Impedance vs. Operating Current



GRAPHS



FIGURE 3
Typical Change of Temperature Coefficient with Change in Operating Current

PACKAGE DIMENSIONS


DIM	INCH		MILLIMETERS	
	MIN	MAX	MIN	MAX
BD	0.063	0.067	1.60	1.70
BL	0.130	0.146	3.30	3.71
ECT	0.016	0.022	0.41	0.56
S	0.001	-	0.03	-

NOTES:

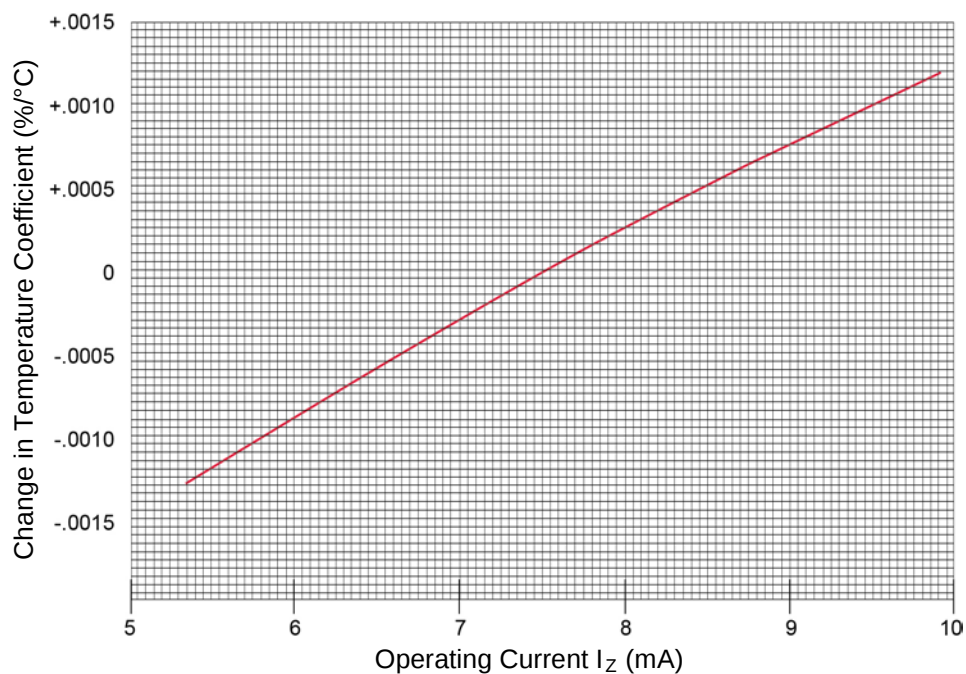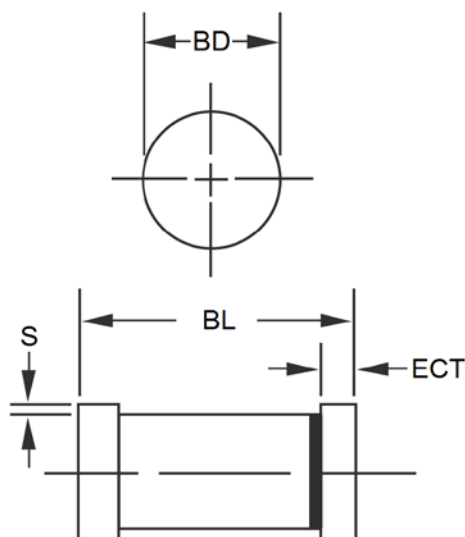1. Dimensions are in inches. Millimeters are given for general information only.
2. Dimensions are pre-solder dip.
3. Referencing to dimension S, minimum clearance of glass body to mounting surface on all orientations.
4. In accordance with ASME Y14.5M, diameters are equivalent to Φ x symbology.

PAD LAYOUT


	INCH	mm
A	0.200	5.08
B	0.055	1.40
C	0.080	2.03

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Microchip:

[CDLL938A/TR](#) [CDLL936/TR](#) [CDLL936B/TR](#) [CDLL937/TR](#) [CDLL936A/TR](#) [CDLL937A/TR](#) [1N935BUR-1/TR](#)
[CDLL935B/TR](#) [CDLL935A/TR](#) [CDLL938/TR](#) [CDLL938B/TR](#) [CDLL937B/TR](#) [CDLL935/TR](#) [JANTX1N937BUR-1](#)
[JANS1N935BUR-1](#) [JANTX1N935BUR-1](#)



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331