

The IE-MiniMc Series are Industrial Equipment (IE) versions of the popular MiniMc Series, offering a wide range of transmission speeds, extended temperature, and multiple powering and mounting options.

Features and Benefits

The most cost-effective fiber converter available

- Low cost and feature rich
- Value add industrial grade extended temperature performance

Versatile Solution

- Stand-alone unit with small, rugged metal enclosure with compact, external power supply
- Also available in Gigabit Switching models (IE-Giga-MiniMc)¹
- -48 VDC terminal for Telco applications²
- Available for a variety of fiber types and connectors, including single-strand fiber

More power options than other converters, for a variety of applications

- Includes country-specific AC power adapter
- Terminal DC power block (non-Telco) with extended voltage range (7 to 50 VDC)
- Installs in the IE-PowerTray/18-AC
- IEEE 802.3af Power Over Ethernet
- Powering options can be combined for AC/DC redundancy
- USB power

Plug-and-Play Operation

- User-friendly Auto Negotiation
- Auto-Cross feature for twisted pair connection on all converters

"Industrial Equipment" (IE) features for operation in difficult environments


- Extended temperature functionality, up to -25° to +85° C
- DIN Rail mountable (DIN clips sold separately)



Measuring less than 3.5 inches deep and 2 inches wide, the IE-MiniMc and IE-Giga-MiniMc Series converters are some of the industry's smallest copper-to-fiber media converters, with both data connections on the same side. The IE-MiniMc family of media converters are a fraction of the cost of other industrial grade alternatives. These products provide the ease and convenience of plug-and-play operation with features including Auto Negotiation and Auto-Cross.

Advanced features such as Link Fault Pass-Through (LFPT) assist operators in identifying breaks in the network when using unmanaged network hardware.

Multiple powering options include Power over Ethernet (PoE/PD), -48 VDC for Telco, AC wall adapter and USB which offer unsurpassed flexibility for a variety of installations.

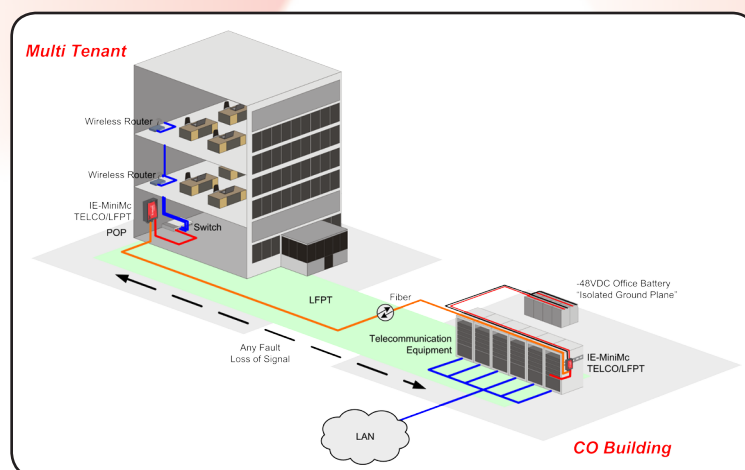

Application Example

Here we see one IE-MiniMc TELCO/LFPT installed at a Telco (powered by a -48 VDC office battery) and one installed at an MTU. The LFPT function assists in identifying a break in the network if one were to occur.

¹ For more information, visit the IE-GigaMinic page at <http://www.imcnetworks.com/Products/product.cfm?family=11>

² For models with Telco Power with Link Fault Pass-Through

Technical Specifications

- IEEE 802.3 10Base-T twisted pair
- IEEE 802.3u 100Base-TX twisted pair
- IEEE 802.3u 100Base-FX fiber
- IEEE 802.3af Power Over Ethernet
- FCC Class A (using DC terminal or PoE power)
- FCC Class B (using any DC jack, optional)
- Supports jumbo packets up to 1916 bytes
- Plug-and-play operation
- RJ-45 and ST or SC ports available (ST connectors not offered for Gigabit speeds)
- 50/125µm or 62.5/125µm multi-mode fiber
- 9/125µm single-mode fiber
- Available with single-strand fiber support
- Includes terminal DC power block
- Country-specific, high-reliability power adapter
- Auto Negotiation
- Auto-Cross for MDI/MDIX
- Layer 2 packet switching, store and forward (forwarding rate: 14,881 pps for 10 Mbps, 148,100 pps for 100 Mbps, 1,481,000 Mbps for 1,000 Mbps)

Regulatory Approvals:

- UL/cUL, CE, CSA

Dimensions:

0.83"H x 1.80"W x 3.35"D
(2.11 x 4.57 x 8.51 cm)

Humidity:

5% to 95% (non-condensing)

Input Specifications:

DC Terminal: 7 - 50 VDC, 1A - 0.1A
Barrel Connector: 5 VDC
DC Terminal (Telco): 12 to 48 VDC
Barrel Connector (Telco): 5 to 24 VDC
PoE: Maximum supply voltage is 50V

Operating Temperature:

-13° F to 185° F (-25° C to +85° C)
using DC or PoE (PD) power
+14° F to +122° F (-10° C to +50° C)
with AC wall adapter

Storage Temperature:

-31° F to +167° F (-35° C to +75° C)



IE-PowerTray/18-AC

- 18 slots for powering MiniMc, MiniMc SFP, Giga-MiniMc, MiniMc-Gigabit, IE-MiniMc and IE-Giga-MiniMc fiber converters
- 1.5U high rack mountable enclosure

Regulatory Approvals:

- FCC Class A
- UL/cUL, CSA, CE

Dimensions

2.30"H x 16.97"W x 9.25"D
(5.80 x 43.10 x 23.5 cm)

Shipping Weight

10 lbs (4.5 kg)

Power Information

AC Input Load: 100-240V AC
±10%, 50/60Hz, 1.5 - 0.75A

Operating Temperature

-40° to +185° F (-40° to +85° C)
5% to 95% (non-condensing),
0 - 10,000 ft. altitude

Storage Temperature

-40° to +185° F (-40° to +85° C)
5% to 95% (non-condensing)

Fiber Optics Specifications

For each product listed below in the Ordering Information section, DISTANCE represents an approximate fiber distance based on industry-standard fiber attenuation specifications. Actual distances will vary for each installation. For complete power budgets and information on calculating specific distances, visit www.imcnetworks.com/go/fcs or contact IMC Networks Fiber Consulting Services at 949-465-3000.

Ordering Information

PART NUMBER	DESCRIPTION	DISTANCE
IE-MiniMc 10/100 *		
855-19720	IE-MiniMc, TP-TX/FX-MM850-ST	2 km
855-19721	IE-MiniMc, TP-TX/FX-MM850-SC	2 km
855-19722	IE-MiniMc, TP-TX/FX-MM1300-ST	5 km
855-19723	IE-MiniMc, TP-TX/FX-MM1300-SC	5 km
855-19724	IE-MiniMc, TP-TX/FX-SM1310/PLUS-ST	40 km
855-19725	IE-MiniMc, TP-TX/FX-SM1310/PLUS-SC	40 km
855-19726	IE-MiniMc, TP-TX/FX-SM1310/LONG-ST	80 km
855-19727	IE-MiniMc, TP-TX/FX-SM1310/LONG-SC	80 km
855-19730	IE-MiniMc, TP-TX/FX-SM1550/LONG-SC	80 km
IE-MiniMc 10/100 Single-Strand Fiber * **		
855-19750	IE-MiniMc, TP-TX/SSFX-MM1310-SC	2 km
855-19751	IE-MiniMc, TP-TX/SSFX-MM1550-SC	2 km
855-19752	IE-MiniMc, TP-TX/SSFX-SM1310-SC	20 km
855-19753	IE-MiniMc, TP-TX/SSFX-SM1550-SC	20 km
855-19754	IE-MiniMc, TP-TX/SSFX-SM1310/PLUS-SC	40 km
855-19755	IE-MiniMc, TP-TX/SSFX-SM1550/PLUS-SC	40 km
855-19756	IE-MiniMc, TP-TX/SSFX-SM1310/LONG-SC	60 km
855-19757	IE-MiniMc, TP-TX/SSFX-SM1550/LONG-SC	60 km

* Modular versions without AC adapter, change the two Part Numbers after the 8 to 54.
(i.e. 855-19724 becomes 854-19724)

** These products have single-strand fiber technology. Deploy in pairs, or connect to another compatible IMC Networks single-strand fiber product.
For more information go to: www.imcnetworks.com/products/SSFX.cfm

PART NUMBER	DESCRIPTION
IE-PowerTray/18-AC ¹	
850-13086	IE-PowerTray/18-AC (1.5U high, Rackmountable Enclosure)

¹ Modules compatible with the IE-PowerTray/18-AC include MiniMc, MiniMc SFP, MiniMc-Gigabit, Giga-MiniMc, IE-MiniMc, IE-MiniMc/Telco-LFPT, IE-MiniMc/LFPT, IE-Giga-MiniMc and IE-ModeConverter SFP/SFP.
For more information, go to: www.imcnetworks.com/Products/ExternalPowerSupply.cfm



IMC Networks

Headquarters

19772 Pauling
Foothill Ranch, CA 92610
TEL: 949-465-3000
FAX: 949-465-3020
sales@imcnetworks.com

IMC Networks

Europe

Herseltsesteenweg 268
B-3200 Aarschot, Belgium
TEL: +32-16-550880
FAX: +32-16-550888
eurosales@imcnetworks.com

IMC Networks

Eastern US/Latin America

28050 U.S. Hwy. 19 North, Suite 306
Clearwater, FL 33761
TEL: 727-797-0300
FAX: 727-797-0331
latinsales@imcnetworks.com

IMC Networks

Fiber Consulting Services

For information call:
TEL: 949-465-3000
1-800-624-1070 (US/CAN)
+32-16-550880 (Europe)
fcs@imcnetworks.com

Copyright © 2012 IMC Networks. All rights reserved.
The information in this document is subject to change without notice. IMC Networks assumes no responsibility for any errors that may appear in this document. Specific product names may be trademarks or registered trademarks and are the property of their respective companies.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331