

## LOW-POWER J-FET INPUT OPERATIONAL AMPLIFIERS

### ■ GENERAL DESCRIPTION

The NJM062C/064C is a J-FET input operational amplifier designed as low-power versions of the NJM072C/074C. It features high input impedance, high slew rate and low input offset and bias current.

The NJM062C/064C is suitable for audio amplifier applications and measurement applications. In addition, the realization of a wide operating temperature reaches by a new design.


### ■ FEATURES

- Wide power supply range :  $\pm 2$  to  $\pm 18V$
- High Input Resistance :  $10^{12}\Omega$  typ.
- Low Operating Current :  $200\mu A/\text{amp}$  typ.
- Internal ESD protection : Human body model (HBM)  $\pm 2000V$  typ.
- Bipolar Technology
- Slew Rate :  $3.5V/\mu s$  typ.
- Wide temperature range :  $-40^{\circ}C$  to  $+105^{\circ}C$

### ■ Input Offset Voltage


NJM062C / 064C	NJM062CA / 064CA
15mV max.	6mV max.

### ■ PIN CONFIGURATION (Top View)



NJM062CG / NJM062CAG


**PIN FUNCTION**  
1. A OUTPUT  
2. A -INPUT  
3. A +INPUT  
4. V<sup>+</sup>  
5. B +INPUT  
6. B -INPUT  
7. B OUTPUT  
8. V<sup>+</sup>

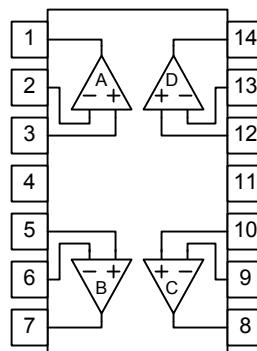

NJM064CG / NJM064CAG

**PIN FUNCTION**  
1. A OUTPUT  
2. A -INPUT  
3. A +INPUT  
4. V<sup>+</sup>  
5. B +INPUT  
6. B -INPUT  
7. B OUTPUT  
8. C OUTPUT  
9. C -INPUT  
10. C +INPUT  
11. V<sup>−</sup>  
12. D +INPUT  
13. D -INPUT  
14. D OUTPUT

### ■ EQUIVALENT CIRCUIT (Each Amplifier)

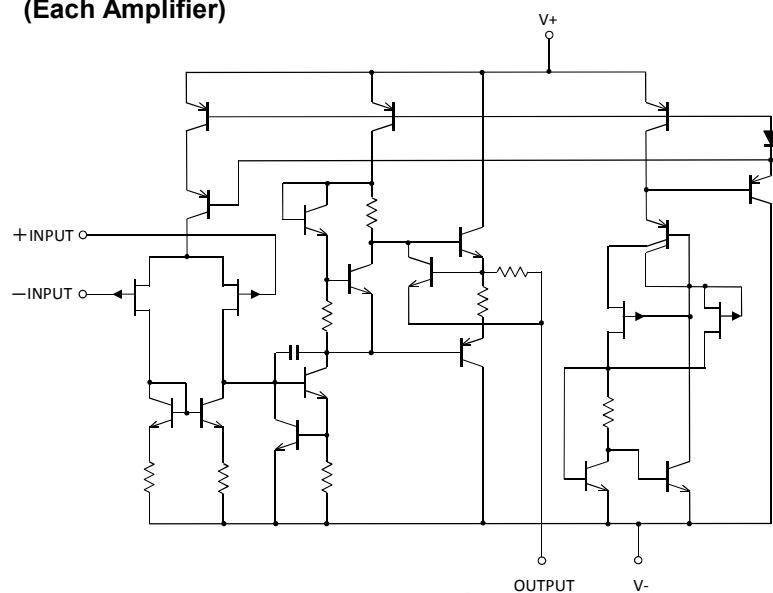

New Japan Radio Co., Ltd.

# NJM062C/064C NJM062CA/064CA

## ■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C, unless otherwise noted.)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V <sup>+</sup> /V <sup>-</sup>	±18	V
Differential Input Voltage <sup>(1)</sup>	V <sub>ID</sub>	±36	V
Input Voltage <sup>(2)</sup>	V <sub>IN</sub>	V-0.3 to V+36	V
Output Terminal Input Voltage	V <sub>O</sub>	V-0.3 to V <sup>+</sup> +0.3	V
Power Dissipation	P <sub>D</sub>	SOP8 : 690 <sup>(3)</sup> 1000 <sup>(4)</sup> SOP14 : 880 <sup>(3)</sup> 1200 <sup>(4)</sup>	mW
Operating Temperature Range	T <sub>opr</sub>	-40 to +105	°C
Storage Temperature Range	T <sub>stg</sub>	-65 to +150	°C

(1) Differential voltage is the voltage difference between +INPUT and -INPUT.

(2) Input voltage is the voltage should be allowed to apply to the input terminal independent of the magnitude of V<sup>+</sup>.

The normal operation will establish when any input is within the Common Mode Input Voltage Range of electrical characteristics.

(3) EIA/JEDEC STANDARD Test board (76.2 x 114.3 x 1.6mm, 2layers, FR-4) mounting

(4) EIA/JEDEC STANDARD Test board (76.2 x 114.3 x 1.6mm, 4layers, FR-4) mounting

## ■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Voltage	V <sup>+</sup> /V <sup>-</sup>	Ta=25°C	±2	-	±18	V

## ■ ELECTRICAL CHARACTERISTICS

V<sup>+</sup>/V<sup>-</sup>=±15V, Ta=25°C (unless otherwise noted)

PARAMETER	SYMBOL	CONDITION	NJM062C/NJM064C			NJM062CA/NJM064CA			UNIT
			MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	
Operating Current	I <sub>CC</sub>	No signal, each amplifier	-	200	250	←	←	←	µA
Input Offset Voltage	V <sub>IO</sub>	R <sub>S</sub> =50Ω Ta=25°C 0°C < Ta < 70°C <sup>(5)</sup>	- -	3 -	15 20	- -	3 -	6 7.5	mV
Input offset voltage drift	ΔV <sub>IO</sub> /ΔT	R <sub>S</sub> =50Ω 0°C < Ta < 70°C <sup>(5)</sup>	-	10	-	←	←	←	µV/°C
Input Offset Current	I <sub>IO</sub>	Ta=25°C 0°C < Ta < 70°C <sup>(5)</sup>	- -	5 -	200 5	- -	5 -	100 3	pA nA
Input Bias Current	I <sub>B</sub>	Ta=25°C 0°C < Ta < 70°C <sup>(5)</sup>	- -	30 -	400 10	- -	30 -	200 7	pA nA
Input Common Mode Voltage Range	V <sub>ICM</sub>	≥CMR MIN	± 13	-13.5 to 15	-	←	←	←	V
Maximum Output Voltage Swing	V <sub>OM</sub>	R <sub>L</sub> =10kΩ Ta=25°C 0°C < Ta < 70°C <sup>(5)</sup>	± 10 ± 10	± 13.5 -	-	←	←	←	V
Large Signal Voltage Gain	A <sub>V</sub>	R <sub>L</sub> ≥10kΩ, V <sub>O</sub> =± 10V Ta=25°C 0°C < Ta < 70°C <sup>(5)</sup>	3 3	20 -	- -	8 8	20 -	-	V/mV
Unity Gain Frequency	f <sub>T</sub>	R <sub>L</sub> =10kΩ	-	1	-	←	←	←	MHz
Input Resistance	R <sub>IN</sub>		-	10 <sup>12</sup>	-	←	←	←	Ω
Common Mode Rejection Ratio	CMR	V <sub>IC</sub> =V <sub>ICM</sub> min, R <sub>S</sub> ≤10kΩ	70	90	-	72	90	-	dB

PARAMETER	SYMBOL	CONDITION	NJM062C/NJM064C			NJM062CA/NJM064CA			UNIT
			MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	
Supply Voltage Rejection Ratio	SVR	$V^+/V^- = \pm 9V \text{ to } \pm 15V$ $R_s \leq 50\Omega$	70	100	-	80	100	-	dB
Channel Separation	CS	$Gv = 40\text{dB}$	-	120	-	←	←	←	dB
Slew rate	SR	$V_{IN} = 10\text{Vpp}$ , $R_L = 10\text{k}\Omega$ $C_L = 100\text{pF}$ Figure1	1.5	3.5	-	←	←	←	$\text{V}/\mu\text{s}$
Rise time	$t_r$	$V_i = 20\text{mVpp}$ , $R_L = 10\text{k}\Omega$ , $C_L = 100\text{pF}$ Figure1	-	0.2	-	←	←	←	$\mu\text{s}$
Overshoot factor	$K_{OV}$	$V_i = 20\text{mVpp}$ , $R_L = 10\text{k}\Omega$ , $C_L = 100\text{pF}$ Figure1	-	10	-	←	←	←	%
Equivalent Input Noise Voltage	$e_n$	$R_s = 20\Omega$ , $f = 1\text{kHz}$	-	35	-	←	←	←	$\text{nV}/\sqrt{\text{Hz}}$

(5) This parameter is not 100% test.

## ■ MEASUREMENT CIRCUITS

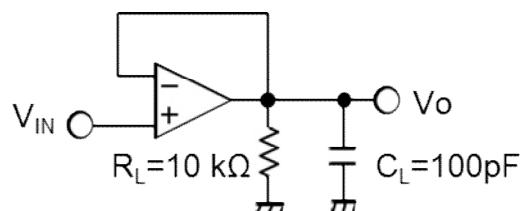


Figure1. Voltage Follower







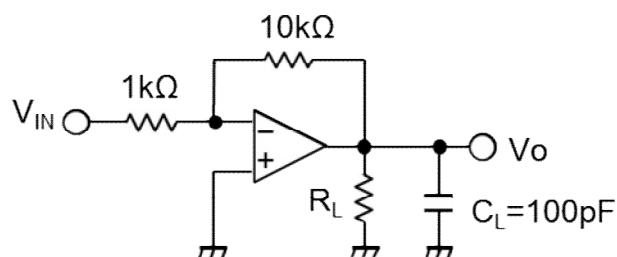


Figure2. 20dB Inverting Amplifier (\*)







(\*) 20dB Inverting Amplifier uses a Maximum Output Voltage vs. Frequency on page 5.







# NJM062C/064C NJM062CA/064CA

## ■ TYPICAL CHARACTERISTICS

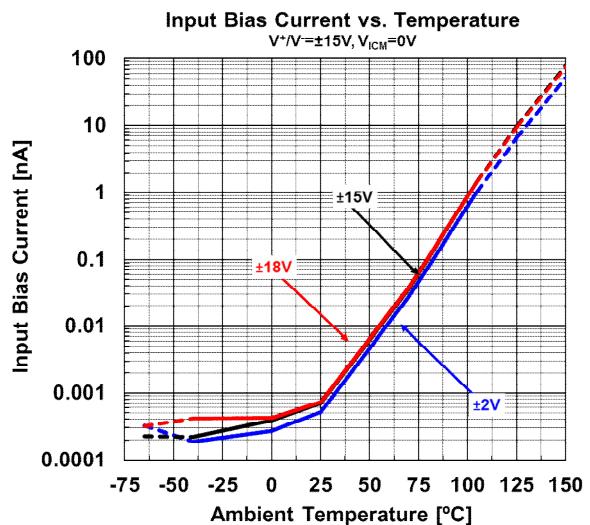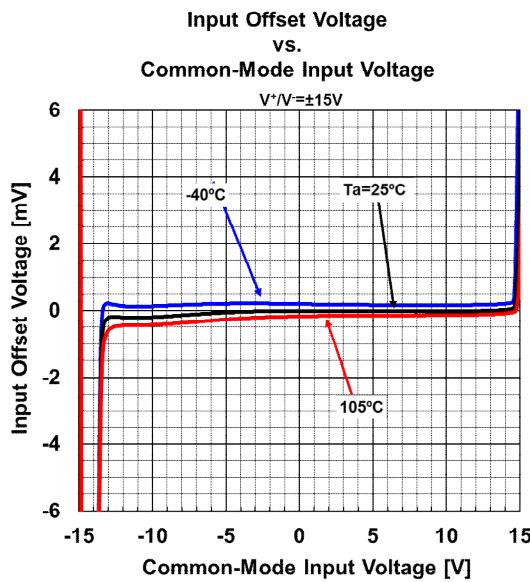
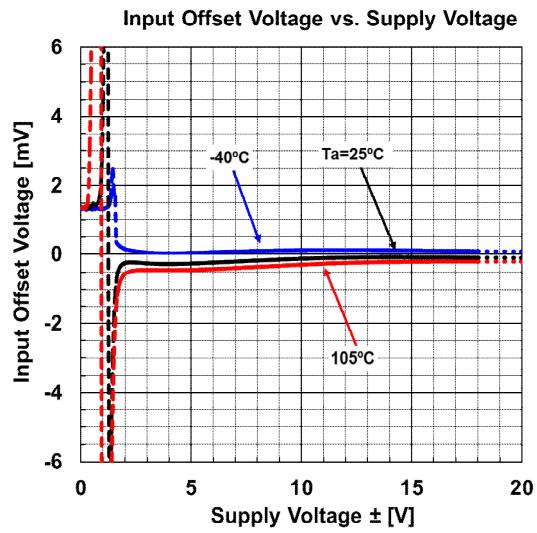
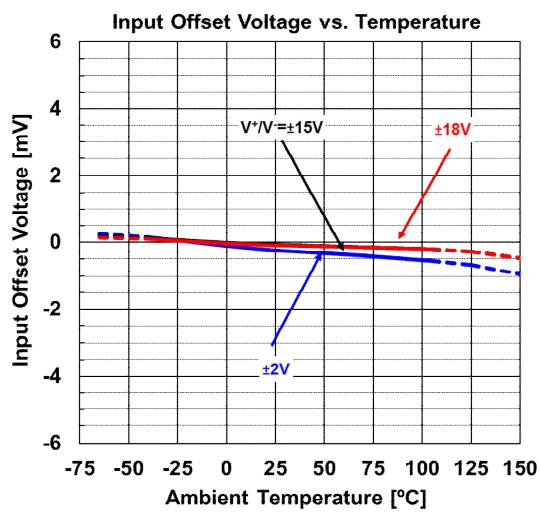
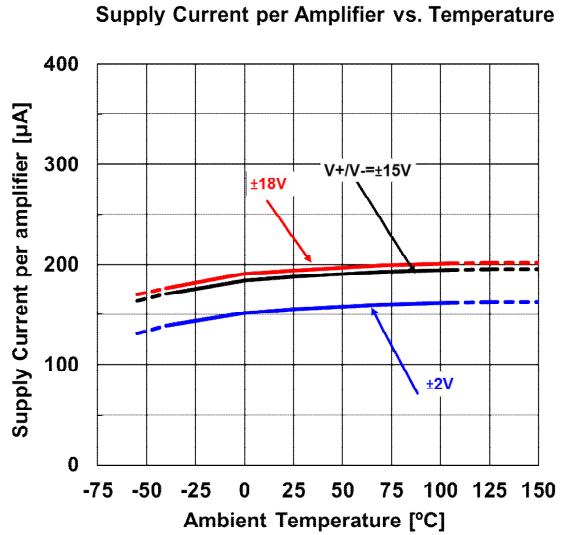
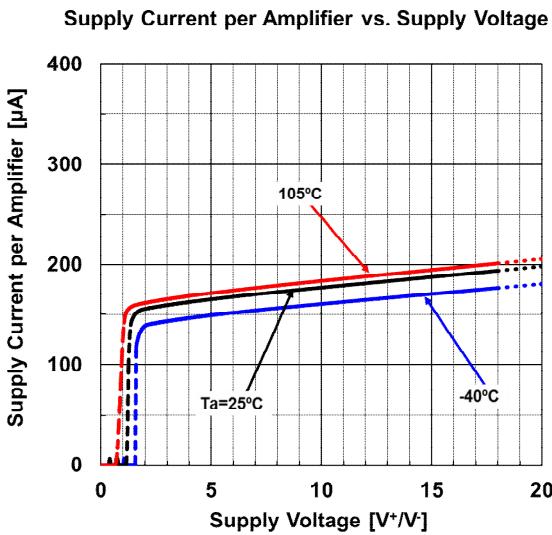


## ■ TYPICAL CHARACTERISTICS

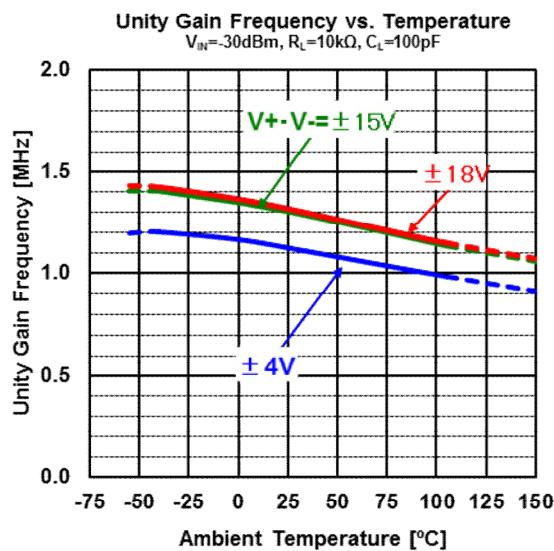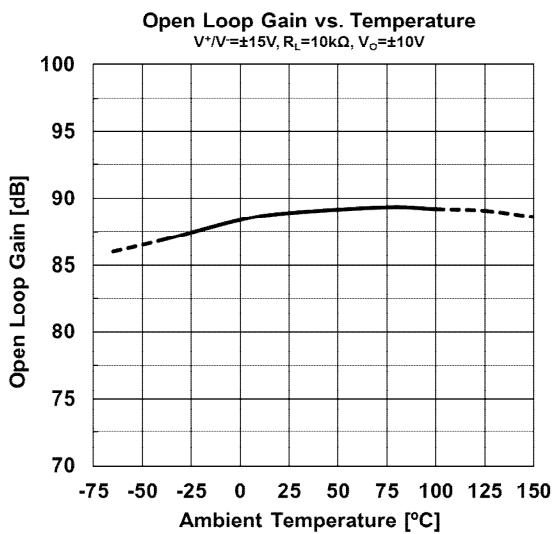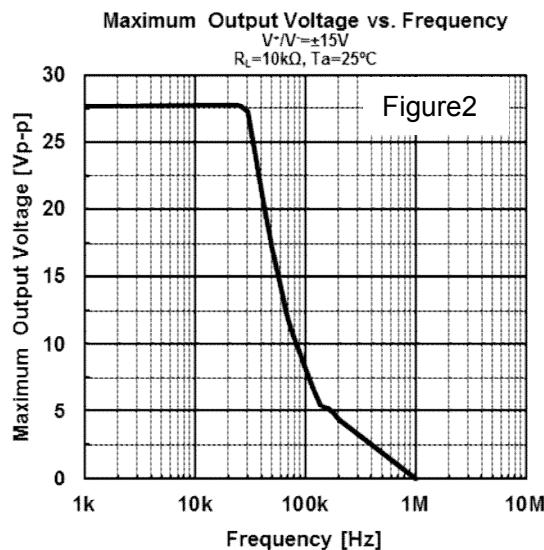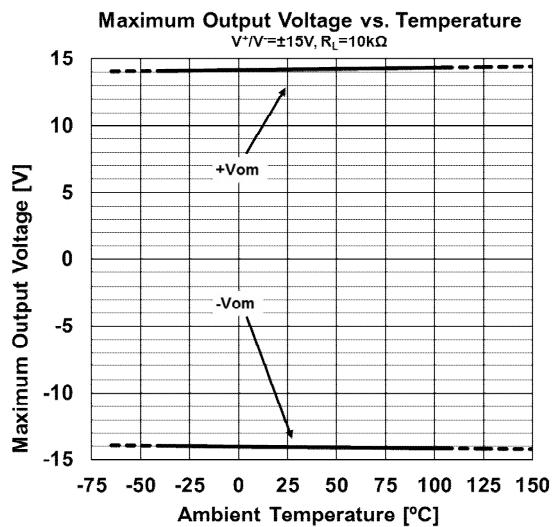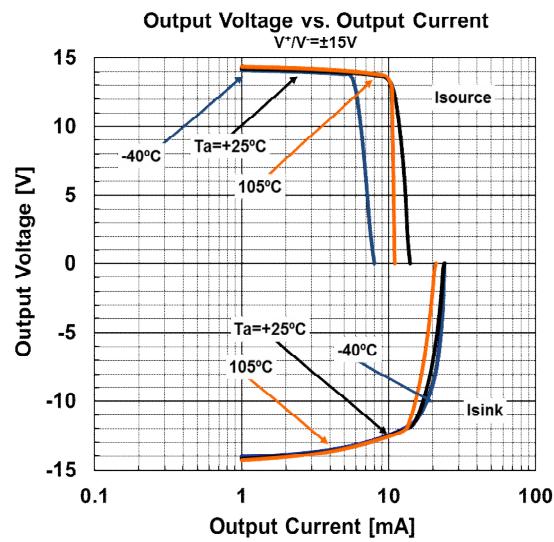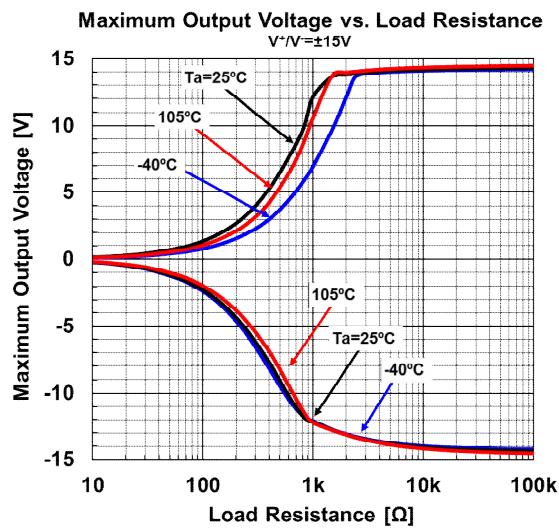

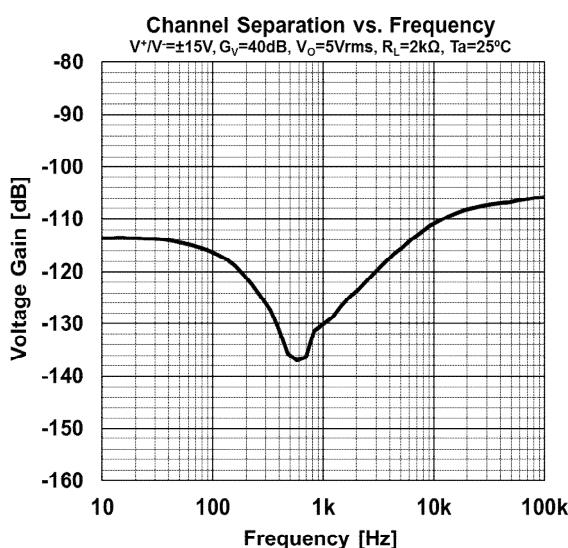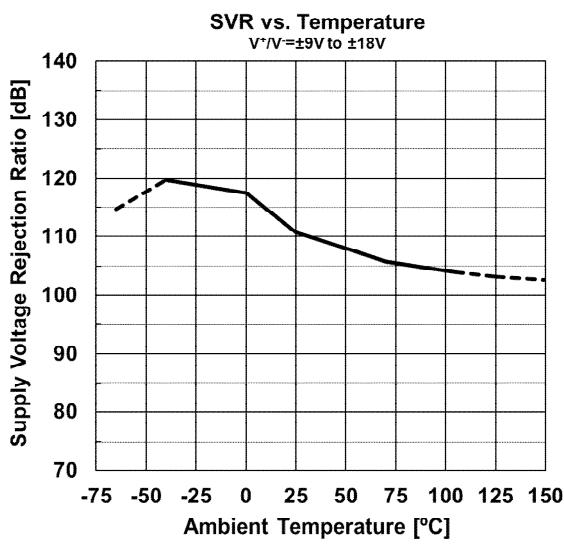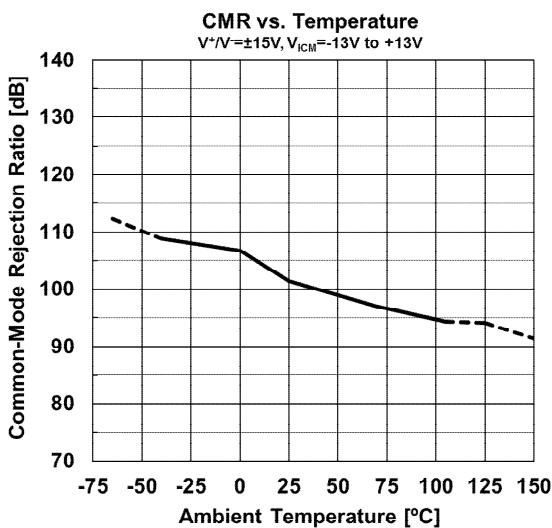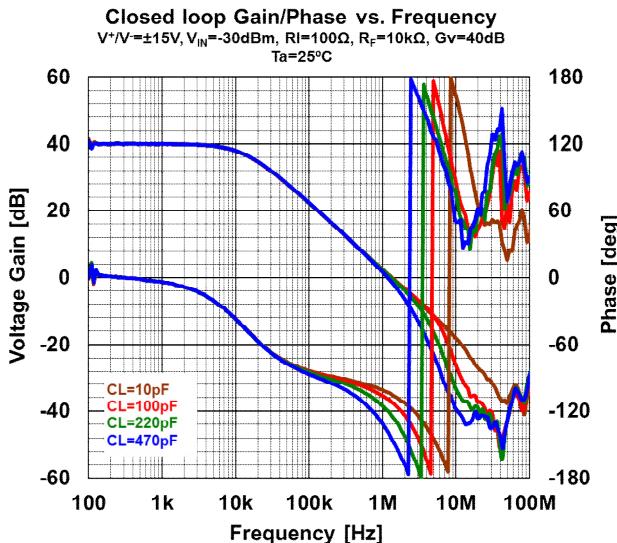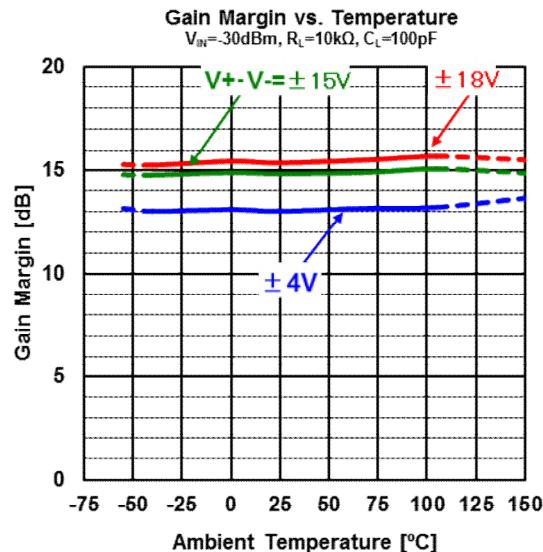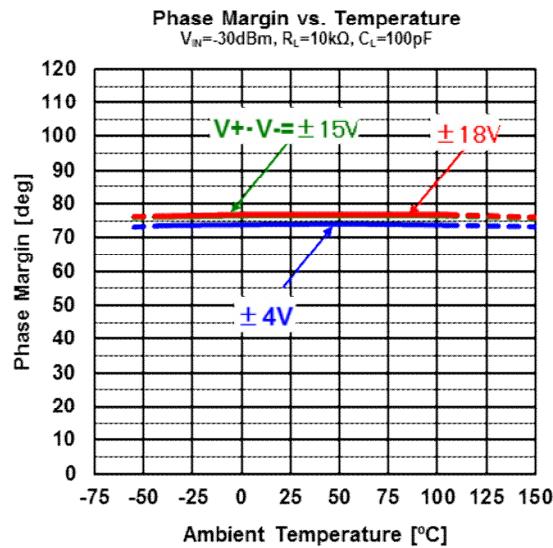
**■ TYPICAL CHARACTERISTICS**


## ■ TYPICAL CHARACTERISTICS

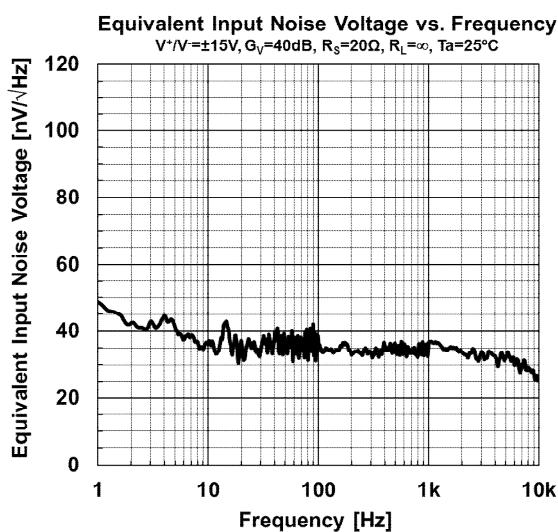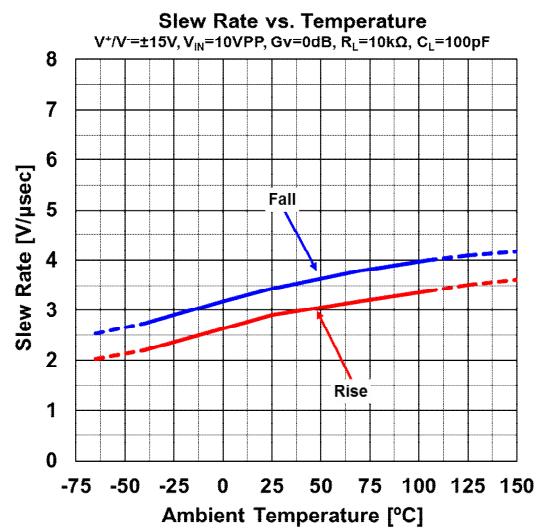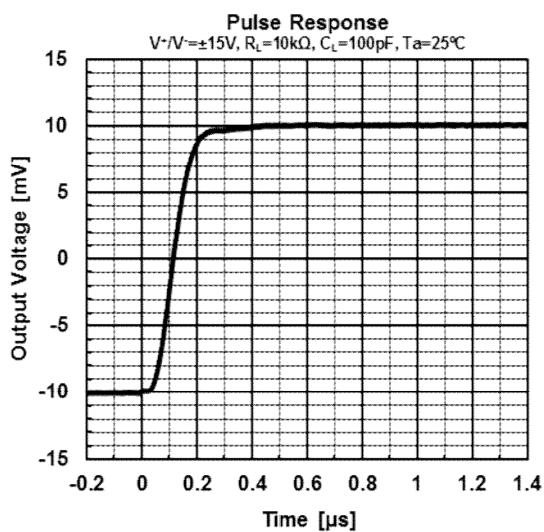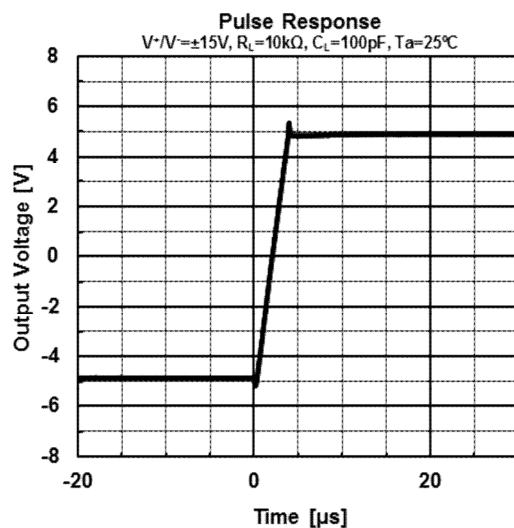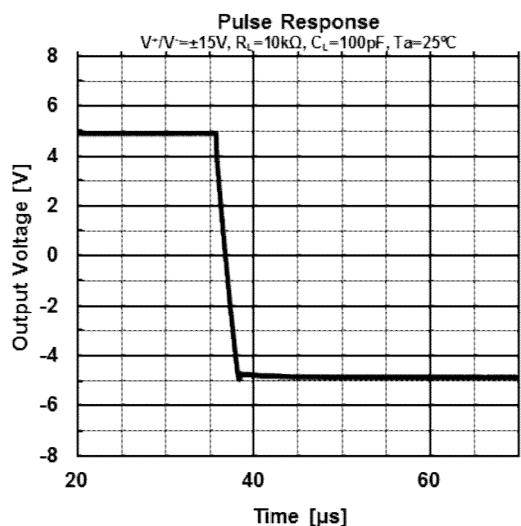


## ■PACKAGE OUTLINE UNIT : mm

## SOP8

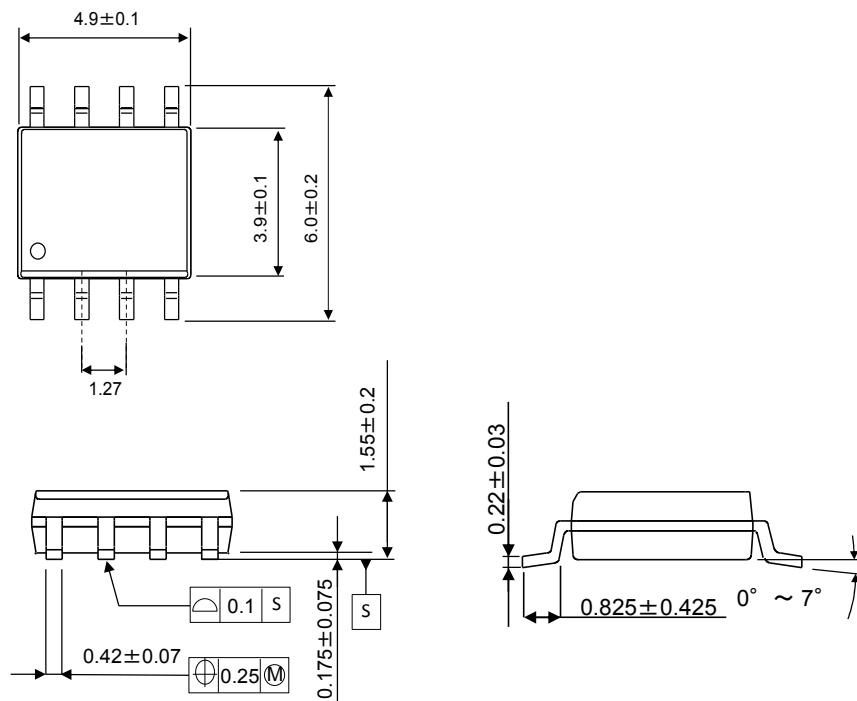

## SOP14

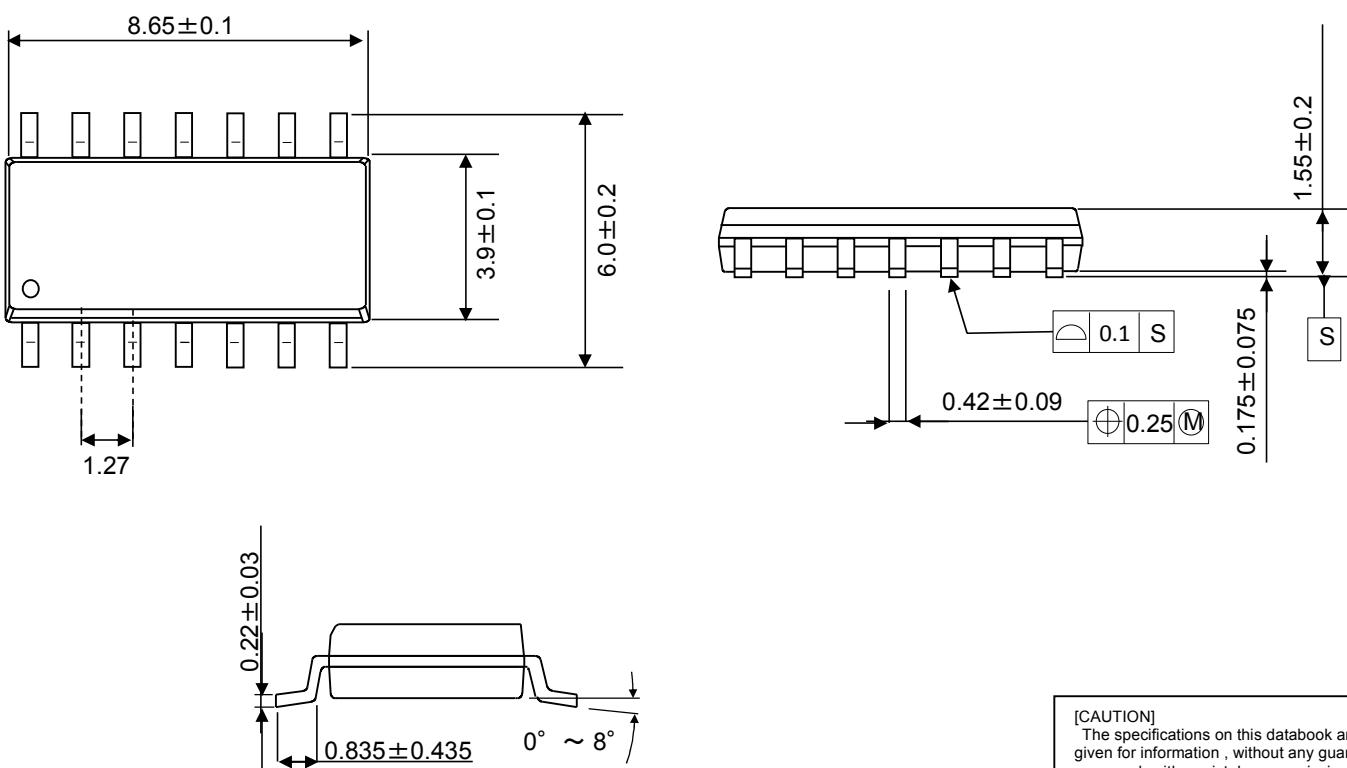

**[CAUTION]**  
The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NJR:

[NJM062CG-TE2](#) [NJM064CAG-TE2](#) [NJM064CG-TE2](#) [NJM062CAG-TE2](#)



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литер Н,  
помещение 100-Н Офис 331