



STANDARD AND  
CUSTOMIZABLE  
SERIAL SERVER



## DIGI CONNECT® SP

Compact serial server delivers a powerful off-the-shelf hardware platform for standard plug and play applications or embedded networking solutions

More and more, electronic devices used in all types of commercial applications are being network-enabled so that data from those devices can be accessed, evaluated and utilized in real time. The Digi Connect SP device server is a simple and cost-effective solution for migrating electronic devices to this emerging world of networked device collaboration.

Built on Digi's 32-bit NET+ARM technology, the Digi Connect SP provides a powerful off-the-shelf hardware platform for standard plug and play device networking as well as custom

network applications. The award-winning NET+ARM architecture provides a seamless migration path to embedded modules and a fully-integrated system-on-a-chip solution.

The Digi Connect SP also provides an easy user interface, product customization options, intelligent remote management and monitoring capabilities through Digi Remote Manager®, full IPv6 support and standard management interfaces including SNMP.

### BENEFITS

- Off-the-shelf hardware platform for standard or custom network applications
- Compact enclosure design with integrated mounting tabs
- RS-232 or switch-selectable RS-232/422/485
- Flexible 9-30 VDC power input
- Product customization options
- SSL/TLS with NIST-certified AES encryption for security sensitive environments
- Digi's patented RealPort® with encryption for COM/TTY port redirection and control
- Support for IPv6, SNMP, SSHv2 and Digi Remote Manager

### RELATED PRODUCTS



Digi One® SP



PortServer®  
TS



PortServer®  
TS MEI



ConnectPort®  
TS 8/16



RealPort®

### APPLICATION EXAMPLE



## CUSTOMIZABLE FIRMWARE MODELS


The Digi Connect SP device server is the ideal platform for custom web- and network-enabled applications. It eliminates the hardware design effort and delivers a true device networking solution that is powerful enough to meet your future performance requirements.

Based on Digi's NET+OS® development platform, it delivers the integrated building blocks and tools to quickly and cost effectively create flexible and secure embedded applications for integrated, high-performance web and networking solutions.

## STANDARD FIRMWARE MODELS

The Digi Connect SP delivers a true plug-and-play device networking solution that combines a compact form factor with proven serial port connectivity. Compared to the similarly-sized Digi One® SP, the Digi Connect SP provides a more extended operating temperature range, IPv6 support, the ability to issue automated email alerts and SNMP traps, and unique product customization capabilities. These and other features make the Digi Connect SP an attractive solution for a broad range of applications in retail/POS, manufacturing, building security, government and medical.

| SPECIFICATIONS          |  | Digi Connect® SP |  |
|-------------------------|--|------------------|--|
| HARDWARE                |  |                  |  |
| PROCESSOR TYPE          | 32-bit NS7520  |                  |  |
| PROCESSOR SPEED         | 55 MHz   |                  |  |
| MEMORY BASE POPULATION  | 4 MB Flash / 16 MB RAM   |                  |  |
| LEDS                    | Network link, Ethernet activity, Power (red)   |                  |  |
| DIMENSIONS (L X W X H)  | 3.876 in x 1.680 in x 0.999 in (9.846 cm x 4.267 cm x 2.537 cm)  |                  |  |
| WEIGHT                  | 2.29 oz (6.50 g)   |                  |  |
| INTERFACES              |  |                  |  |
| SERIAL                  | RS-232 or switch-selectable RS-232/422/485 serial interface (DB-9M connector); Throughput up to 230,400 bps; 5/6/7/8 data bits; 1/1.5/2 stop bits; None/even/odd parity; Full signal support with software/hardware flow control |                  |  |
| ETHERNET                | Auto-sensing 10/100 Mbit Ethernet interface and network link   |                  |  |
| POWER REQUIREMENTS      |  |                  |  |
| POWER INPUT             | 9-30VDC @ 370 mA   |                  |  |
| POWER SUPPLY (INCLUDED) | North America: 120VAC; International: 90-264 VAC   |                  |  |
| ENVIRONMENTAL           |  |                  |  |
| OPERATING TEMPERATURE   | 0° C to 60° C (32° F to 140° F)  |                  |  |
| STORAGE TEMPERATURE     | -40° C to +90° C (-40° F to +194° F)   |                  |  |
| RELATIVE HUMIDITY       | 5% to 90% (non-condensing)   |                  |  |
| ALTITUDE                | 12,000 feet (3,658 meters)   |                  |  |
| REGULATORY APPROVALS    |  |                  |  |
| SAFETY                  | CSA 22.2 NO. 60950, EN 60950, UL60950  |                  |  |
| EMISSIONS/IMMUNITY      | FCC Part 15 Class A, EN55022, EN5J024, VCCI, AS 3548   |                  |  |

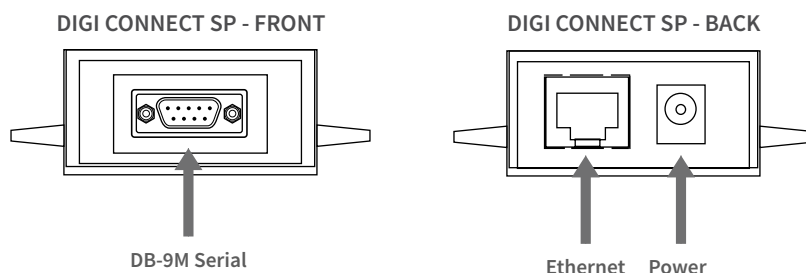

| PART NUMBERS                           | DESCRIPTION   |
|--|---|
| UNITS FOR NET+OS APPLICATIONS          |   |
| DC-SP-01-C                             | Digi Connect SP (single-unit pack w/power supply)                 |
| UNITS WITH DIGI PLUG-AND-PLAY FIRMWARE |   |
| DC-SP-01-S                             | Digi Connect SP (single-unit pack w/power supply)                 |
| DC-SP-01-S-25                          | Digi Connect SP (25-unit pack w/power supplies)                   |
| DC-SP-01-S-W                           | Digi Connect SP (single-unit pack w/power supply) (International) |
| DC-SP-01-S-W-25                        | Digi Connect SP (25-unit pack w/power supplies) (International)   |

FOR MORE INFORMATION  
PLEASE VISIT [WWW.DIGI.COM](http://WWW.DIGI.COM)

**DIGI SERVICE AND SUPPORT** / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit [www.digi.com/support](http://www.digi.com/support).

© 1996-2018 Digi International Inc. All rights reserved.  
All trademarks are the property of their respective owners.

91001379  
C4/618

**DIGI INTERNATIONAL WORLDWIDE HQ**  
877-912-3444 / 952-912-3444 / [www.digi.com](http://www.digi.com)

**DIGI INTERNATIONAL GERMANY**  
+49-89-540-428-0

**DIGI INTERNATIONAL JAPAN**  
+81-3-5428-0261 / [www.digi-intl.co.jp](http://www.digi-intl.co.jp)

**DIGI INTERNATIONAL SINGAPORE**  
+65-6213-5380

**DIGI INTERNATIONAL CHINA**  
+86-21-50492199 / [www.digi.com.cn](http://www.digi.com.cn)





**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331