# NB3M8T3910G Evaluation Board User's Manual

#### Introduction

The NB3M8T3910GEVB is a custom evaluation board developed by ON Semiconductor for the NB3M8T3910G. This evaluation board was designed to provide a flexible and convenient platform to quickly evaluate, characterize and verify the operation of the NB3M8T3910G.

This evaluation board manual contains:


• Information on the NB3M8T3910G Evaluation Board

**Top View** 

- Assembly Instructions
- Test and Measurement Setup Procedures
- Bill of Materials

This manual should be used in conjunction with the device datasheet <a href="NB3M8T3910/D">NB3M8T3910/D</a> which contains full technical details on the device specifications and operation.

#### **Bottom View**





**READ FIRST - INTRODUCTION** 

The NB3M8T3910G has two banks of 5 differential outputs. Each output bank can be independently selected as LVPECL, LVDS or HCSL outputs by the SMODEAx/Bx select pins.

This evaluation board, NB3M8T3910GEVB, has been configured to evaluate each output type.

Of the ten possible differential outputs, three are dedicated as LVPECL, three are dedicated as LVDS and four are dedicated as HCSL (labeled on board).

The Single-Ended LVCMOS Output, REFOUT, is controlled by the Synchronous OE\_SE pin. For Clock frequencies above 250 MHz, the REFOUT line should be disabled.

Each dedicated output pair on the board is configured per Table 1 below:



ON Semiconductor®

http://onsemi.com

**EVAL BOARD USER'S MANUAL** 

Publication Order Number: EVBUM2238/D

Table 1. OUTPUT DEDICATION OF THE NB3M8T3910GEVB

Output Pin Name	Output Type (Dedicated)	SMODEA [1:0]	SMODEB [1:0]	Output Measurement Method	
QA0/QA0b	LVPECL	0 0	хх	Use 50- $\Omega$ Scope Head; there is no load on the board	
QA1/QA1b	LVPECL	0 0	хх	Use 50-Ω Scope Head; there is no load on the board	
QA2/QA2b	LVDS	0 1	x x	Measure with Single or Differential Hi-Z Probes; Outputs have 100-Ω termination resistor across at SMA connectors	
QA3/QA3b	HCSL	10	x x	Use 50- $\Omega$ Scope Head; there is no 50- $\Omega$ to GND on the board; or install 50- $\Omega$ SMA terminators and use a Hi-Z probe	
QA4/QA4b	HCSL	10	хх	Use 50- $\Omega$ Scope Head; there is no 50- $\Omega$ to GND on the board; or install 50- $\Omega$ SMA terminators and use a Hi-Z probe	
	•	•	<b>i</b>		
QB0/QB0b	LVPECL	x x	0 0	Measure with Single or Differential Hi-Z Probes; these LVPECL outputs have a Thevenin termination resistor network.	
QB1/QB1b	LVDS	x x	01	Measure with Single or Differential Hi-Z Probes; Outputs have $100-\Omega$ termination resistor across at SMA connectors	
QB2/QB2b	LVDS	x x	01	Measure with Single or Differential Hi-Z Probes; Outputs have $100\text{-}\Omega$ termination resistor across at SMA connectors	
QB3/QB3b	HCSL	x x	10	Measure with Single or Differential Hi-Z Probes; there is 50- $\!\Omega$ to GND on the board	
QB4/QB4b	HCSL	x x	10	Use 50- $\Omega$ Scope Head; there is no 50- $\Omega$ to GND on the board; or install 50- $\Omega$ SMA terminators and use a Hi-Z probe	

NOTE: x = don't care

# LVDS OUTPUT CONFIGURATION



Figure 2. LVDS Output Configuration


LVDS outputs are typically terminated with 100- $\!\Omega$  across the Q & Qb output pair.

On QA2/QA2b, QB1/QB1b, QB2/QB2b, there are on-board 100-ohm output termination resistors across the

LVDS outputs. Two 0- $\Omega$  resistors connect the metal traces and a 100- $\Omega$  resistor connects between the traces.

Use a single-ended or differential high-impedance probe across the  $100\mbox{-}\Omega$  resistor.

#### **HCSL OUTPUT CONFIGURATION**

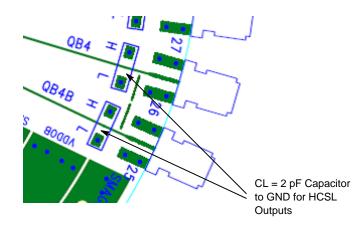




Figure 3. HCSL Output Configuration

HCSL outputs are typically loaded and terminated with a  $R_{series} = 33-\Omega$  and  $50-\Omega$  to ground. This can be easily accomplished by connecting the HCSL outputs to the  $50-\Omega$  internal impedance in the oscilloscope.

On QA3/QA3b, QA4/QA4b, QB3/QB3b, QB4/QB4b, there are on-board  $R_{series} = 33-\Omega$  series termination resistors

installed for each HCSL output. Also, there is a CL = 2 pF installed to GND.

For QA3/QA3b, QA4/QA4b, QB4/QB4b use  $50-\Omega$  to GND of oscilloscope sampling head to satisfy the HCSL output loading. QB3/QB3b has a  $50-\Omega$  output load, thus use a Hi-Z probe for measurements.

#### LVPECL OUTPUT CONFIGURATION




Figure 4. LVPECL Output Configuration

On QA0/QA0b or QA1/QA1b, there is no on-board LVPECL output loading or termination.

Use the  $50-\Omega$  to GND of the oscilloscope sampling head to satisfy the LVPECL output loading and termination. This single supply scheme will simplify the LVPECL output testing versus a split power supply. However, this method will actually draw more output current with a single power supply versus a dual/split power supply. Nevertheless, this extra output current will be within the Maximum Ratings limit.




Figure 5. LVPECL Output Configuration, Thevenin Termination Resistors

On QB0/QB0b, there is an on-board Thevenin output loading and termination resistor network; 130- $\Omega$  from LVPECL output to VDDO and 80- $\Omega$  from output to GND. This arrangement will satisfy the LVPECL DC output loading and AC termination.

Use single-ended or differential high-impedance probes.

See AND8020/D, section 3, for more information.

#### "Split" or Dual Power Supply Connections




Figure 6. LVPECL – "Split" or Dual Power Supply Configuration

Most ECL outputs are open emitter and need to be DC loaded and AC terminated to VCC –  $2.0\,\mathrm{V}$  via a  $50\,\Omega$  resistor. For standard ECL lab setup and test, a split (dual) power supply is recommended enabling the 50- $\Omega$  internal impedance in the oscilloscope, or other measuring instrument, to be used as an ECL output load/termination. By offsetting VCC =  $+2.0\,\mathrm{V}$ , SMAGND = VCC –  $2.0\,\mathrm{V}$  =  $0\,\mathrm{V}$ , SMAGND is the system ground,  $0\,\mathrm{V}$ , and DUTGND is  $-1.3\,\mathrm{V}$  or  $-0.5\,\mathrm{V}$ .

More information on ECL termination is provided in AND8020/D.

Power Supply Connector	"Spilt" Power Supply
VDD/VDDOx	VCC = +2.0 V
SMAGND	VTT = 0 V
DUTGND	DUTGND = -1.3 V for 3.3 V p/s or -0.5 V for 2.5 V p/s

#### LVCMOS OUTPUT CONFIGURATION

On REFOUT use a Hi–Z probe or the following set up to use a 50  $\Omega$  to GND sampling head Oscilloscope.

"Split" or Dual Power Supply Connections




Figure 7. LVCMOS – "Split" or Dual Power Supply Configuration

# QUICK START LAB SET-UP USER'S GUIDE

#### **Power-Up, Input and Output Connections**

- 1. Connect the VDD and VDDOx banana jacks with power supply cables to +3.3 V, and DUTGND and SMAGND to 0 V.
- 2. Select Crystal input and monitor 25 MHz on each Qn output.
- Connect a signal generator to the SMA connectors for CLK0/CLK0b or CLK1/CLK1b inputs.
   ohm termination resistors are installed for a signal generator on the board. Set appropriate input signal levels and frequency.
- 4. Observe the Qn outputs with a high-Z probe oscilloscope.

**Table 2. POWER SUPPLY CONNECTIONS** 

Device Pin Power Supply Connector	Power Supply
VDD	+3.3 V
VDDOx	+3.3 V
SMAGND	0 V
DUTGND	0 V

#### **Single Power Supply Connections**




Figure 8. Single Power Supply Configuration

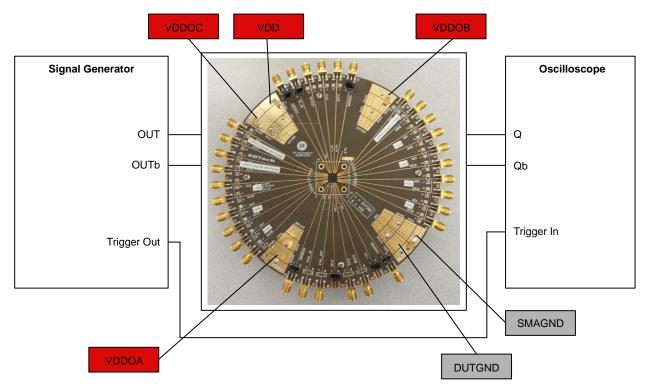


Figure 9. Typical Lab Test Set-Up

#### **Board Layout**

The custom QFN–48 Evaluation Board provides a high bandwidth, 50- $\Omega$  controlled impedance environment and is implemented in four layers. The first layer or primary "high-speed" trace layer is FR4 material, and is designed to have equal electrical length on all signal traces from the device under test (DUT) pins to the SMA connectors. The

second layer is the 0.5 oz copper ground plane and is dedicated for the SMA connector ground plane. FR4 dielectric material is placed between the second and third layers and between third and fourth layers. The third layer is also 0.5 oz copper plane. A portion of this layer is designated for the device VDD and DUTGND power planes. The fourth layer is the VDDOx layer.

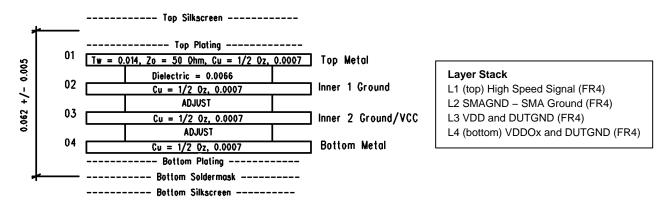


Figure 10. QFN-48 Evaluation Board Layout, 4-Layer Stack

Table 2 and Figure 8 describes the board configuration for the power supplies, Figure 3 shows typical input and output connections.

**VDD** is the positive power supply.

**VDDOA, VDDOB, VDDOC** are the positive power supplies for the outputs.

**DUTGND** (**Device Under Test Ground**) is the negative power supply for the device. Banana jack is labeled DUTGND.

**Exposed Pad (EP)**. The exposed pad footprint on the board is mechanically connected (soldered) to the exposed pad of the QFN–48 package, and is electrically connected to DUTGND power supply.

**SMAGND** is the ground for the SMA connectors, is always 0 V and is not to be confused with the device ground, DUTGND. SMAGND and DUTGND can be connected in single-supply applications.

### XTAL\_IN Crystal

A 25 MHz crystal is installed. Set the SELx pins in Table 3 of datasheet to select crystal. 27 pF load capacitors are installed.

If a single-ended Clock input is needed to drive XTAL\_IN, then remove the crystal and load capacitor, and install a 0-ohm resistor on RX1 and a 50-ohm resistor on RT1 on bottom side. This 50-ohm to GND will terminate the signal generator. Use the XTAL\_IN SMA connector.

# **Evaluation Board Assembly Instructions**

The NB3M8T3910GEVB evaluation board was designed for characterizing devices in a  $50-\Omega$  laboratory environment using high bandwidth equipment and accommodates a custom QFN-48 socket. Table 3 contains the Bill of Materials for this evaluation board.

#### Solder the Device on the Evaluation Board

The soldering of a QFN-48 package to the evaluation board can be accomplished by hand soldering or solder reflow techniques using solder paste and a hot air source. Make sure pin 1 of the device is located properly and all the pins are aligned to the footprint pads. Solder the device to the evaluation board.

# **Installing the SMA Connectors**

Each high-speed input and output has an SMA connector installed on the board. Install all the required SMA connectors onto the board and solder the center signal conductor pin to the board. Please note that the alignment of the center signal connector pin of the SMA connector to the metal trace on the board can influence lab results. The launch and reflection of the signals are largely influenced by imperfect alignment and soldering of the SMA connector.

#### **Power Supply Configuration**

Install the power supply banana jacks on the bottom side; install the appropriate bypass capacitors on top and bottom sides.

The positive power supply banana jack connector for the core and inputs is labeled VDD.

The positive power supply banana jack connector for the outputs is labeled VDDOA/B/C.

The device negative power supply banana jack connector is labeled DUTGND.

The SMA Ground plane/supply banana jack connector is labeled SMAGND.

The power supply banana jacks and typical capacitor by-pass connections of the evaluation board are shown in Figure 11.

It is recommended to add power supply bypass capacitors at the device pins to reduce unwanted noise.

 $10\,\mu\text{F}$  capacitors are connected from VDD and VDDOx and DUTGND, to SMAGND at the banana jacks.

A  $0.1\,\mu F$  capacitor is installed from each VDD and VDDOx pin to SMAGND.

NOTE: Exposed Pad = DUTGND




Figure 11. Typical Power Supply By-Pass
Capacitor Arrangement

# LVPECL QA1/QA1b 50- $\Omega$ TO GND OF OSCILLOSCOPE




Figure 12. 50 MHz




Figure 13. 100 MHz




Figure 14. 250 MHz



Figure 15. 500 MHz




Figure 16. 1000 MHz




Figure 17. 1250 MHz

# LVPECL QA1/QA1b 50- $\Omega$ TO GND OF OSCILLOSCOPE





Figure 18. 1500 MHz


# LVPECL QB0/QB0b HI-Z PROBE OSCILLOSCOPE



Ch1 Position

Figure 19. 50 MHz

Figure 20. 100 MHz







Figure 21. 250 MHz

Figure 22. 500 MHz






Figure 23. 1000 MHz

Figure 24. 1250 MHz

# LVPECL QB0/QB0b HI-Z PROBE OSCILLOSCOPE




Figure 25. 1500 MHz

# LVDS QB1/QB1b SINGLE-ENDED HI-Z PROBE OSCILLOSCOPE




Figure 26. 50 MHz




Figure 27. 100 MHz




Figure 28. 250 MHz




Figure 29. 500 MHz




Figure 30. 1000 MHz




Figure 31. 1250 MHz

# LVDS QB1/QB1b SINGLE-ENDED HI-Z PROBE OSCILLOSCOPE




Figure 32. 1500 MHz

#### LVDS QB1/QB1b DIFFERENTIAL HI-Z PROBE OSCILLOSCOPE




Figure 33. 50 MHz




Figure 34. 100 MHz




Figure 35. 250 MHz




Figure 36. 500 MHz




Figure 37. 1000 MHz




Figure 38. 1250 MHz

# LVDS QB1/QB1b DIFFERENTIAL HI-Z PROBE OSCILLOSCOPE




Figure 39. 1500 MHz

# HCSL QA3/QA3b 50-Ω TO GND OF OSCILLOSCOPE



Figure 40. 50 MHz




Figure 41. 100 MHz




Figure 42. 250 MHz

# HCSL QB3/QB3b HI-Z PROBE OSCILLOSCOPE




Figure 43. 50 MHz




Figure 44. 100 MHz




Figure 45. 250 MHz

# **LVCMOS REFOUT**




Figure 46. 50 MHz




Figure 47. 100 MHz




Figure 48. 200 MHz

# **BILL OF MATERIALS**

Table 3. NB3M8T3910GEVB BILL OF MATERIALS

Component	Qty.	Description	Manufacturer	Part Number	Web Site
SMA Connector	32	Edge Mount	Johnson	142-0711-821	
Banana Jack Connector	4	Red – Side Launch	Deltron	571-0500	Mouser #164-6219
Banana Jack Connector	2	Black - Side Launch	Deltron	571-0100	Mouser #164-6218
Chip Resistor R1, R2, R3, R4, R6, R7, R30, R31, R33-R36, R44	13 + 6	0-Ω 0402	Vishay	CRCW04020000Z0ED	Digi-Key 541-0.0JCT-ND
Chip Resistor R9-R12, R25-R28	8	33-Ω 0402	Panasonic	ERJ-2RKF33R0X	Digi-Key ERJ-2RKF33R0X
Chip Resistor R20, R21, R40, R41	4	50-Ω 1%, 0402	Vishay	FC0402E50R0FST1	Digi-Key FC0402E50R0FST1-ND
Chip Resistor	3	100-Ω 0402	Vishay	FC0402E1000FST1	Digi-Key FC0402E1000FST1-ND
Chip Resistor R38	1	475-Ω 0402	Vishay	MCS04020C4750FE000	Digi-Key 2312 275 14751-ND
	2	27 pF Crystal Load			
Capacitor	5	10 μF ±10%, Case "C" 25 V or 16 V	KEMET	T491C106K025AT T491C106K016AS	
Chip Capacitor C6, C57, C58, C59, C64, C72, C80, C81, C91-C96	14	0.1 μF ±10%, 0603 0.1 μF ±10%, 0402	AVX	0603C104KAT2A 0402ZD104KAT2A	www.avx.com Digi-Key 478-1129-1-ND
Chip Capacitor	6	2 pF	TDK	C1005C0G1H020C	Digi-Key 445-4863-1-ND
Header J14, J19, J22, J23, J39, J46, J47	7	3-Pin3 Header, thru-hole 0.1	3M		
Shunt	7		Sullins	QPC02SXGN-RC	Digi-Key S9337-ND or A26229-ND
Crystal	1	25 MHz Crystal	Abracon		
Crystal Receptacles	2	Pin Receptacle, Amp, .140 lg, Max pin .021 Tin, Gold	Mill-Max	0462-0-15-01-11-02-04-0	Digi-Key 0462-015011102040-ND
Stand-off	4	Standoff, 4-40 1/4 × 5/8	Keystone	1808	Digi-Key 1808K-ND
Screw	4	Screw, 4-40 × 0.25, PHP	Building Fasteners	PMS 440 0025 PH	Digi-Key H342-ND
Evaluation Board	1	NB3M8T3910GEVB QFN-48 Evaluation Board	ON Semiconductor	NB3M8T3910GEVB	
Device Under Test	1	DUT	ON Semiconductor	NB3M8T3910G	www.onsemi.com
	•				•

NOTE: Components are available through most distributors, i.e. <u>www.newark.com</u>, <u>www.Digikey.com</u>

ON Semiconductor and the 👊 are registered trademarks of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries. SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any licensee under its patent rights of others. SCILLC products are not designed, intended, or other applications in systems in systems intended for surprised for use as components in systems insystems in systems in systems intended for parameters in systems in systems. or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

#### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor P.O. Box 5163, Denver, Colorado 80217 USA **Phone**: 303–675–2175 or 800–344–3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910 Japan Customer Focus Center

Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative



Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию.

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России, а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научноисследовательскими институтами России.

С нами вы становитесь еще успешнее!

#### Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,

Промышленная ул, дом № 19, литера Н,

помещение 100-Н Офис 331