

S1D13746 TV-Out Graphics Engine

August 2007


The S1D13746 is an extremely low cost, low pin-count device providing direct support for TV from a standard memory-mapped frame-buffer. Internal high quality scaling algorithms allow for low resolution input to be smoothly scaled to the full resolution as determined by either PAL or NTSC standards. The S1D13746 is the ideal solution for cellular phone markets where TV-output is a requirement.

The S1D13746 contains 312K bytes of embedded SRAM. Input data can be double-buffered, thereby acting as a frame rate converter and preventing any visual tearing during streaming input. The minimal feature set and high level of integration (embedded high output DAC) provides a low cost, low power, single chip solution to meet the demands of embedded markets requiring Digital Video, such as Mobile Communications devices.

■ FEATURES

- Embedded 312K byte SRAM
- Double-buffered for streaming video
- Low Operating Voltage
- Serial / Parallel Host Interface
- Parallel RGB Interface
- Multiple Input Data formats
- High Output DAC
- Input Image Rotation (SwivelView™ 90/180/270°)
- Bi-Cubic Scalar from input to output
- PAL and NTSC output
- Automatic Border
- Auto-Centering
- Destructive Windows (Overlays) with transparency function
- Software Initiated Power Save Mode
- Internal PLL or Digital Clock Input

■ SYSTEM BLOCK DIAGRAM

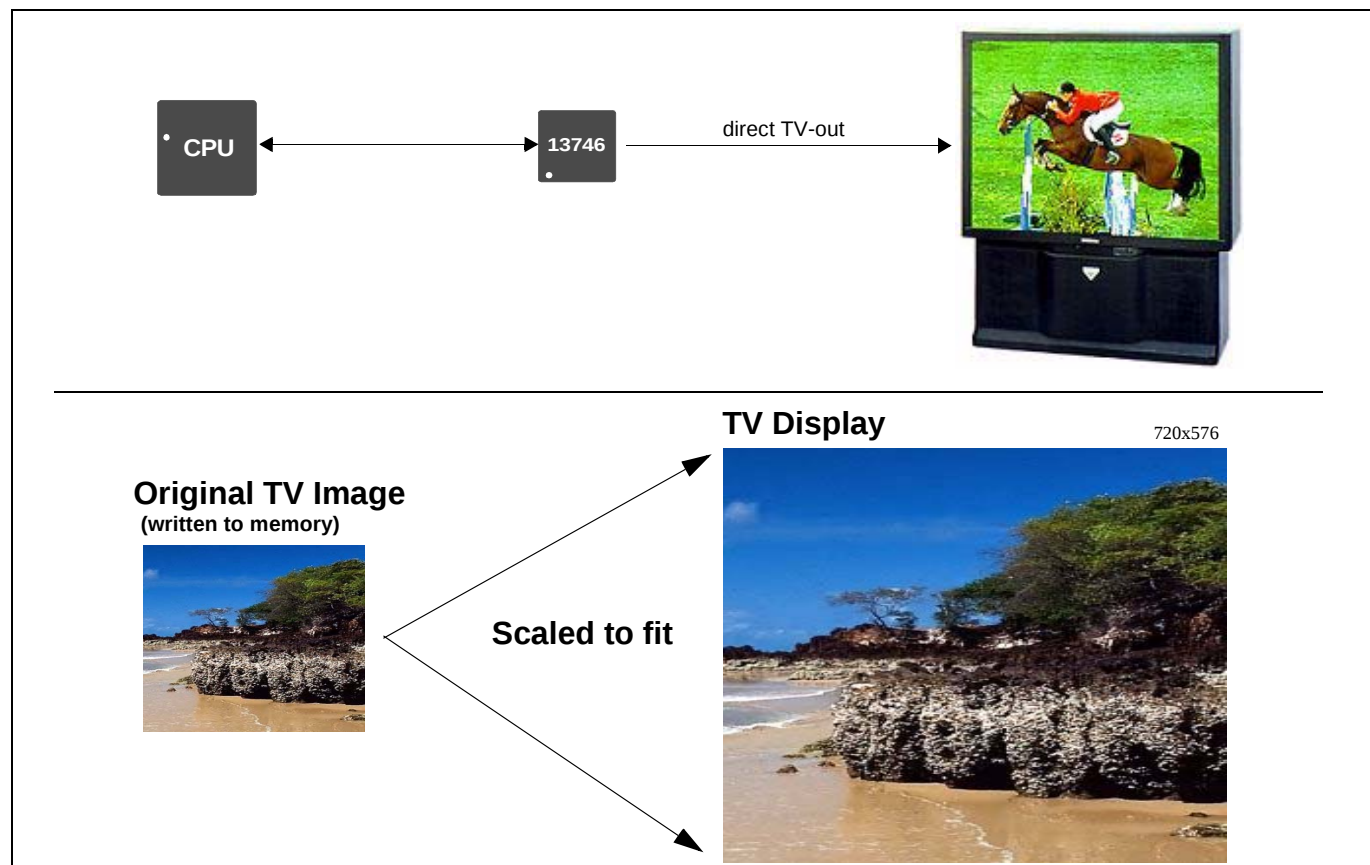

S1D13746

■ DESCRIPTION

Integrated Frame Buffer

- 312K byte SRAM

CPU Interface

- Parallel Indirect Interface (Intel 80)
- Serial Interface
 - 3-wire (9-bit)
 - 4-wire (8-bit SPI)
- Parallel RGB Interface

Input Formats

- RGB: 3:3:2, 5:6:5, 6:6:6, 8:8:8
- YUV: 4:2:0, 4:2:2
- All input formats are converted and stored as YUV 4:2:0
- Input image can be rotated (SwivelView 90/180/270°)

Input Scalar

- Bi-Cubic, 9-bit, non-integer based
- Arbitrary Horizontal / Vertical settings
- Automatic scaling based on input/output window settings

TV Output

- Composite PAL/NTSC output
- S-Video PAL/NTSC output
- Programmable Chrominance / Luminance Filters
- 3x3 Pixel filter
- Auto-Border / Auto-Center
- Wide-Screen Signalling Support (ETSI EN 300 294 compliant)
- Closed Caption Support (CEA-608-B)
- Macrovision Protection support (bond out option)
- Test Pattern Generator
- Supports Destructive Windows (overlays) with transparency function

Miscellaneous

- Internal PLL or digital clock input
- Software initiated power save mode
- CORE_{VDD} 1.5 Volts and IO_{VDD} 1.8 to 3.3 Volts
- Package: PFBGA 100-pin (7mm x 7mm)

■ THEORY OF OPERATION

The S1D13746 contains its own frame-buffer memory where image data can be stored and displayed from. Input images larger than the memory size are automatically scaled down using a Bi-cubic method before being stored. All images can be stored using a double-buffered architecture to prevent any visual tearing and act as a rate converter. All stored images can be further scaled up/down for display on the TV. If the resulting scaled image does not fit the maximum resolution as defined by the TV standard, the image is auto-centered and bordered. The 3x3 pixel filter and programmable chrominance / luminance filters are provided to generate a high quality resulting image.

The S1D13746 supports Wide-Screen Signalling, Closed Captioning, includes a built-in Test Pattern Generator, and has a bond-out option available for Macrovision Protection

CONTACT YOUR SALES REPRESENTATIVE FOR THESE COMPREHENSIVE DESIGN TOOLS

- S1D13746 Technical Documentation
- CPU Independent Software Utilities
- S1D13746 Evaluation Boards
- Royalty Free source level driver code

Japan

Seiko Epson Corporation
IC International Sales Group
421-8, Hino, Hino-shi
Tokyo 191-8501, Japan
Tel: 042-587-5812
Fax: 042-587-5564
<http://www.epson.co.jp/>

Hong Kong

Epson Hong Kong Ltd.
20/F., Harbour Centre
25 Harbour Road
Wanchai, Hong Kong
Tel: 2585-4600
Fax: 2827-4346
<http://www.epson.com.hk/>

North America

Epson Electronics America, Inc.
2580 Orchard Parkway
San Jose, CA 95131, USA
Tel: (408) 922-0200
Fax: (408) 922-0238
<http://www.eea.epson.com/>

Europe

Epson Europe Electronics GmbH
Riesstrasse 15
80992 Munich, Germany
Tel: 089-14005-0
Fax: 089-14005-110
<http://www.epson-electronics.de/>

Taiwan

Epson Taiwan Technology & Trading Ltd.
14F, No. 7
Song Ren Road
Taipei 110
Tel: 02-8786-6688
Fax: 02-8786-6677
<http://www.epson.com.tw/>

Singapore

Epson Singapore Pte Ltd
1 HarbourFront Place #03-02
HarbourFront Tower One
Singapore, 098633
Tel: (65) 6586-5500
Fax: (65) 6271-3182
<http://www.epson.com.sg/>

© SEIKO EPSON CORPORATION 2005 - 2007. All rights reserved.

Information in this document is subject to change without notice. You may download and use this document, but only for your own use in evaluating Seiko Epson/EPSON products. You may not modify the document. Epson Research and Development, Inc. disclaims any representation that the contents of this document are accurate or current. The Programs/Technologies described in this document may contain material protected under U.S. and/or International Patent laws.

EPSON is a registered trademark of Seiko Epson Corporation. All other trademarks are the property of their respective owners.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331