




COMMUNICATIONS AND
CONTROL PROCESSOR

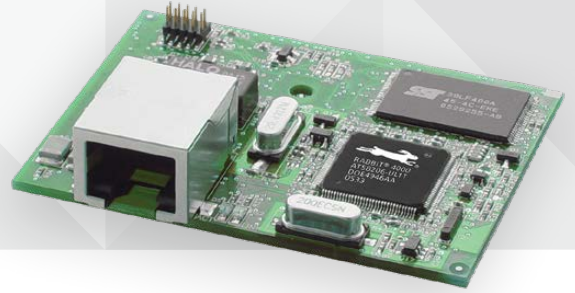

DIGI RABBITCORE RCM4000 SERIES

A powerful embedded Ethernet control device with the intelligence and Internet connectivity needed for remote monitoring and control of your devices

The RCM4000 series is designed to mount directly to a user-supplied motherboard and acts as the microprocessor of the embedded system. The microprocessor features 28 GPIO lines shared with up to five serial ports and four levels of alternate pin functions that include variable phase PWM, quadrature decoder and input capture.

The RCM4000 series, with its robust feature set, ample memory, 10Base-T Ethernet and analog, is ready for network

connectivity and I/O control for true device Internet communication and control. Evaluation of the RCM4000 is easy with the RCM4000 development kit.

BENEFITS

- Rabbit 4000 running at 59 MHz
- Up to 1 MB (16-bit) Program Flash, 1 MB (16-bit) SRAM, 32 MB of Flash memory
- 10Base-T Ethernet (RJ-45 connector), up to 28 GPIO, up to 5 serial ports
- 8 channels 12-bit A/D converter
- Web server capability and remote device control
- Low-cost and easily deployable platform for non-critical embedded security
- Security-key feature with "tamper detect" and encryption capabilities

RELATED PRODUCTS



RabbitCore®
RCM4100
Series



RabbitCore®
RCM4200
Series



Rabbit® SBC
BL4S200
Series



RabbitCore®
RCM4300
Series



Dynamic C®

APPLICATION EXAMPLE



COMPUTER
TERMINAL

Ethernet



JUNCTION BOX WHERE
RCM400 RESIDES

BUILDING SECURITY

RABBITCORE® RCM4000



RS-232



Door Sensor



Camera



Door Sensor

SPECIFICATIONS		RCM4000	RCM4010
FEATURES			
MICROPROCESSOR	Rabbit® 4000 at 59 MHz		
EMI REDUCTION	Spectrum spreader for reduced EMI (radiated emissions)		
ETHERNET PORT	10Base-T, RJ-45, 2 LEDs		
SRAM (16-BIT)	512K		
FLASH MEMORY (16-BIT) (PROGRAM)	512K		
SERIAL MEMORY (DATA) (NAND FLASH)	32 MB (NAND flash)	—	
BACKUP BATTERY	Connection for user-supplied backup battery (to support RTC and data SRAM)		
GENERAL PURPOSE I/O	22 parallel digital I/O lines: Configurable with 4 layers of alternate functions	28 parallel digital I/O lines: Configurable with 4 layers of alternate functions	
ADDITIONAL INPUTS	2 startup mode, reset in, CONVERT	2 startup mode, reset in	
ADDITIONAL OUTPUTS	Status, reset out, analog VREF	Status, reset out	
ANALOG INPUTS	8 channels single-ended or 4 channels differential programmable gain 1, 2, 4, 5, 8, 10, 16 and 20 V/V	—	
A/D CONVERTER RESOLUTION	12 bits (11 bits single-ended)	—	
A/D CONVERSION TIME (INCLUDING 120 MS RAW COUNTED AND DYNAMIC C[®])	180 µs	—	
AUXILIARY I/O BUS	8 data lines and 6 address lines (shared with parallel I/O lines), plus I/O read/write		
SERIAL PORTS	4 shared high-speed, CMOS-compatible ports: All 4 configurable as asynchronous (with IrDA) or as clocked serial (SPI) 1 asynchronous clocked serial port shared with programming port 1 clocked serial port shared with A/D converter	5 shared high-speed, CMOS-compatible ports: All 5 configurable as asynchronous (with IrDA), 4 as clocked serial (SPI), and 1 as SDLC/HDLC 1 asynchronous clocked serial port shared with programming port	
SERIAL RATE	Maximum asynchronous baud rate = CLK/8		
SLAVE INTERFACE	Slave port allows the RCM4000 to be used as an intelligent peripheral device slaved to a master processor		
REAL TIME CLOCK	Yes		
TIMERS	Ten 8-bit timers (6 cascadable from the first), one 10-bit timer with 2 match registers, and one 16-bit timer with 4 outputs and 8 set/reset registers		
WATCHDOG/SUPERVISOR	Yes		
PULSE-WIDTH MODULATORS	—	2 channels: Synchronized PWM with 10-bit counter Variable-phase synchronized PWM with 16-bit counter	
QUADRATURE DECODER	—	2-channel quadrature decoder accepts inputs from external incremental encoder modules	
POWER	3.0– 3.6 VDC, 90 mA @ 3.3V (preliminary, pins unloaded)		
OPERATING TEMPERATURE	0° C to +70° C		
HUMIDITY	5% to 95%, non-condensing		
CONNECTORS	Programming header		
BOARD SIZE	1.84" × 2.42" × 0.77" (47 mm × 61 mm × 20 mm)		
PRODUCT WARRANTY	3 years		

PART NUMBERS	DESCRIPTION
20-101-1094	RCM4000
20-101-1112	RCM4010

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2019 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001547
C4/319

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL GERMANY
+49-89-540-428-0

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn





**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331