



Features

- Long life carbon element
- Assortment of resistance tapers
- 45 mm, 60 mm and 100 mm travel lengths
- Single and dual gang elements
- Long operational life
- Tracking error within ± 2 dB



PTF Series Long Life Slide Potentiometer

Electrical Characteristics

Standard Resistance Range	 1K ohms to 1 megohm
Standard Resistance Tolerance	... ± 20 %
End Resistance	 1 ohm max.
Insulation Resistance @ 500 VDC	 100 megohms min.
Dielectric Withstanding Voltage	 1000 VAC
Tracking Error	 ± 2 dB
Standard Taper	 Linear, Audio
Power Rating - Linear	
45 mm	 0.25 watt
60 & 100 mm	 0.5 watt
Power Rating - Audio	
45 mm	 0.125 watt
60 & 100 mm	 0.25 watt
Slider Noise	 60 mV max.

Environmental Characteristics


Operational Life	 100,000 cycles
TR Shift	 ± 15 %
Operating Temperature Range	 -10°C to $+55^{\circ}\text{C}$
Resistance to Solder Heat	 ± 5 %

Mechanical Characteristics


Mechanical Travel	 See Product Dimensions
Operating Force	 50 gf
Stop Strength	 5 kgf min.
Shaft Axial Force	 10 kgf min.
Shaft Wobble	... $2(2 \times L/25)$ mm p-p max.
Soldering Condition	
Manual	 $300^{\circ}\text{C} \pm 5^{\circ}\text{C}$ for 3 sec.
Wave	 $260^{\circ}\text{C} \pm 5^{\circ}\text{C}$ for 5 sec.
Wash	 Not recommended

Product Dimensions

45 mm Length of Travel Lever End Style "A"

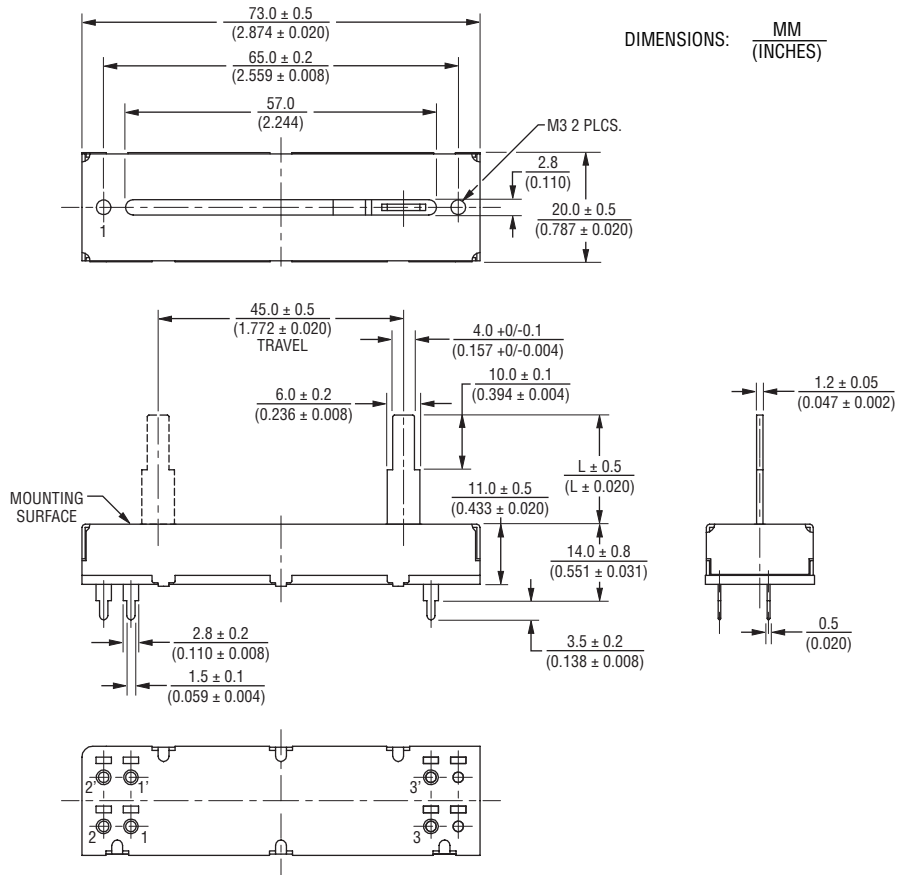


Mounting Hole Detail

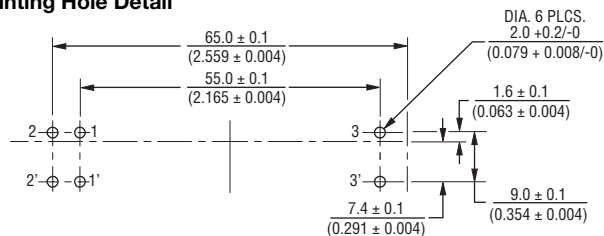


Schematics

Single Gang



Dual Gang



- Mixing consoles
- Drum machines
- Keyboards and synthesizers
- Equalizers

BOURNS®

60 mm Length of Travel Lever End Style "A"



Technical drawing showing dimensions and tolerances for a mechanical part. The drawing includes a side view on the left and a front view on the right. Dimensions are given in millimeters (mm) and inches (in). Tolerances are specified as $\pm$ values.

Key dimensions and tolerances:

- Overall length: 80.0 ± 0.1 mm (3.150 ± 0.004 in)
- Distance from left face to center of hole 3: 70.0 ± 0.1 mm (2.756 ± 0.004 in)
- Distance from center of hole 3 to center of hole 3': 1.9 mm (0.075 in)
- Distance from center of hole 3' to center of hole 3'': 7.1 ± 0.1 mm (0.280 ± 0.004 in)
- Distance from center of hole 3'' to center of hole 3''': 9.0 ± 0.1 mm (0.354 ± 0.004 in)
- Distance from center of hole 3''' to center of hole 3'''': 9.0 ± 0.1 mm (0.354 ± 0.004 in)
- Distance from center of hole 3'''' to center of hole 3''': 6.0 ± 0.1 mm (0.236 ± 0.004 in)
- Distance from center of hole 3''' to center of hole 3'': 3.0 mm (0.118 in)
- Distance from center of hole 3'' to center of hole 3': 2.0 ± 0.2 mm (0.079 ± 0.008 in)
- Distance from center of hole 3' to center of hole 3: 9.0 ± 0.1 mm (0.354 ± 0.004 in)

Note: DIA. 6 PLCS. (Diameter 6 holes)


Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

PTF Series Long Life Slide Potentiometer


BOURNS®

Product Dimensions

100 mm Length of Travel
Lever End Style "A"

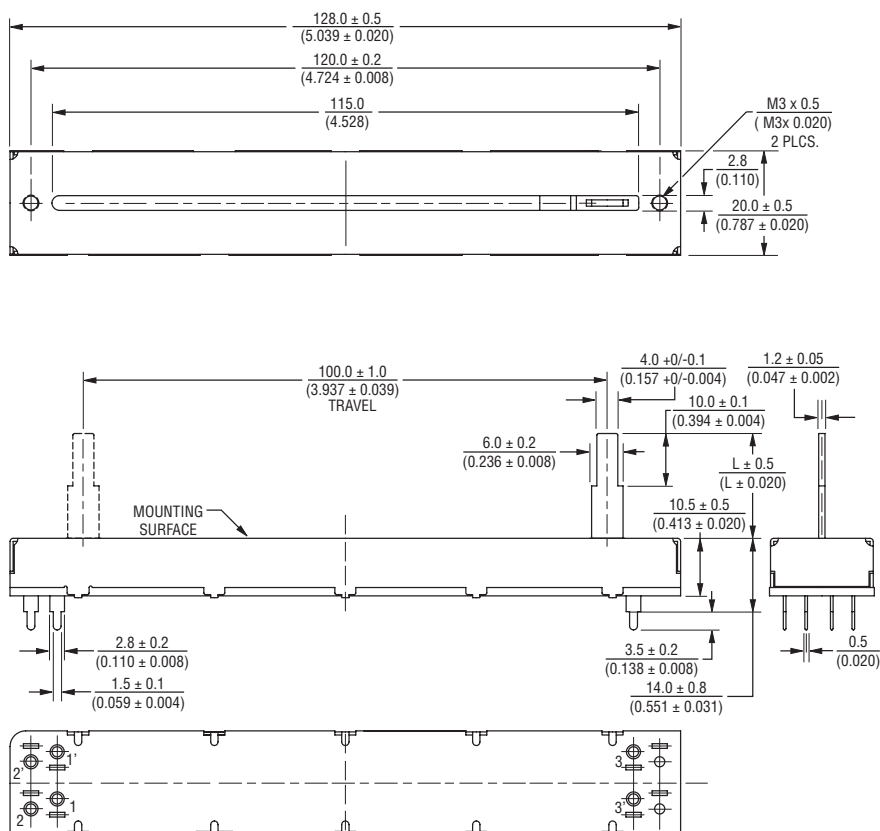

Mounting Hole Detail

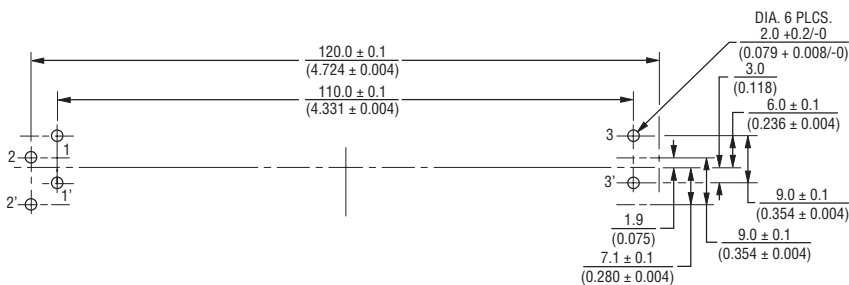


DIMENSIONS: $\frac{\text{MM}}{(\text{INCHES})}$

PTF Series Long Life Slide Potentiometer

BOURNS®

Product Dimensions

45 mm Length of Travel
Lever End Style "T"

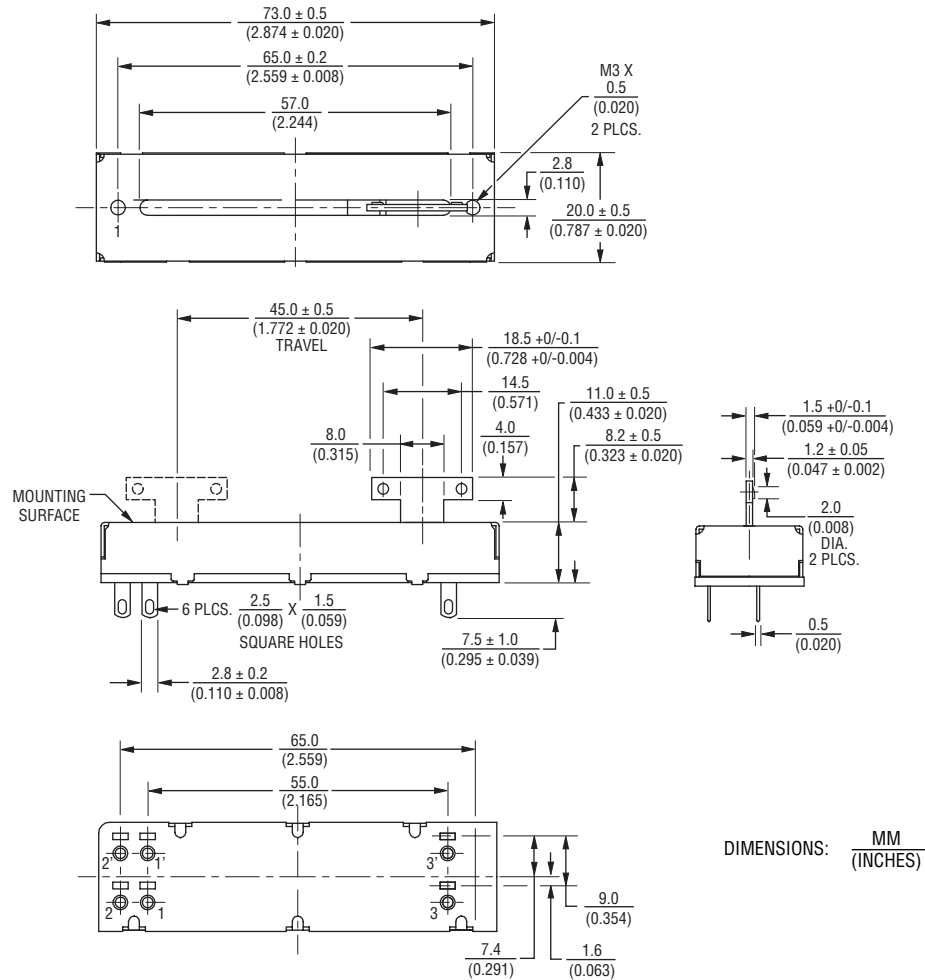


PTF Series Long Life Slide Potentiometer

BOURNS®

Product Dimensions

60 mm Length of Travel
Lever End Style "T"

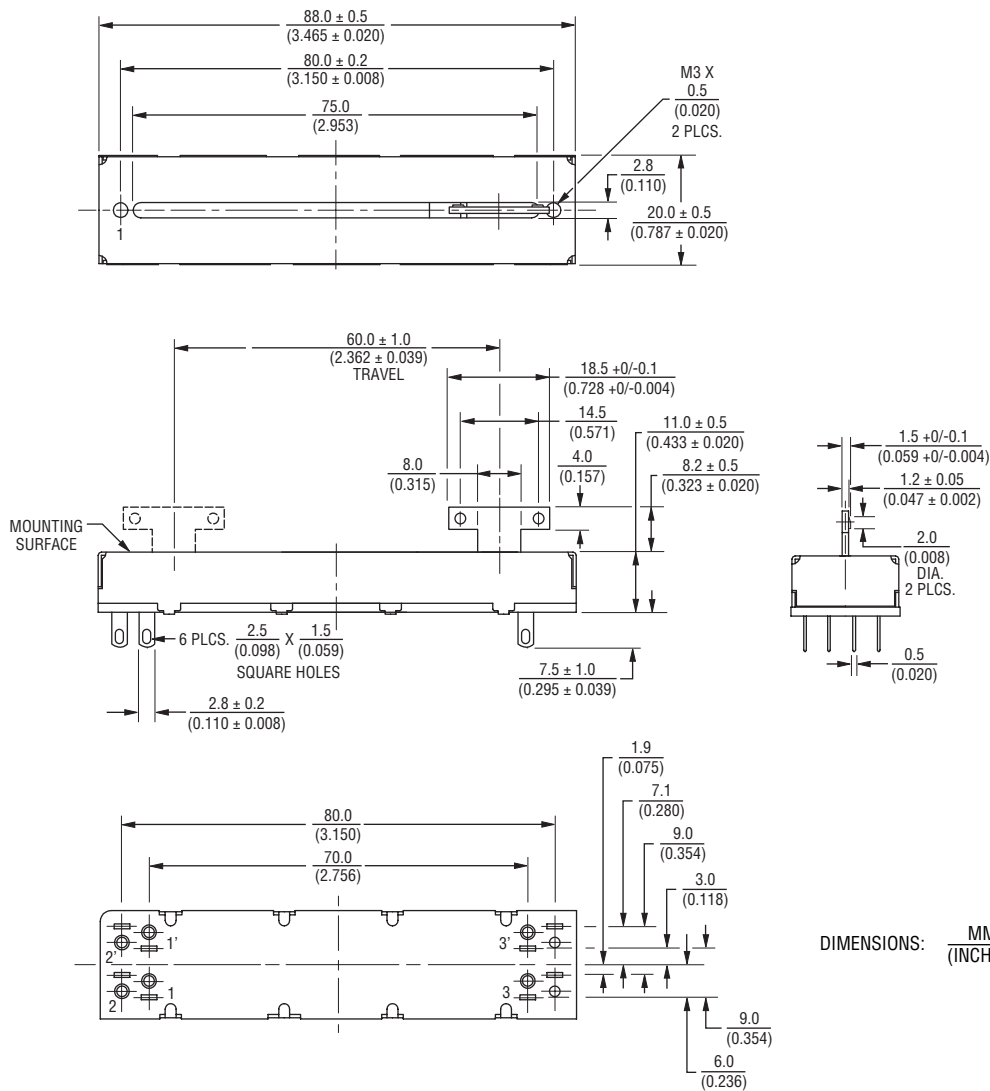





Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

PTF Series Long Life Slide Potentiometer

BOURNS®

Product Dimensions

100 mm Length of Travel
Lever End Style "T"

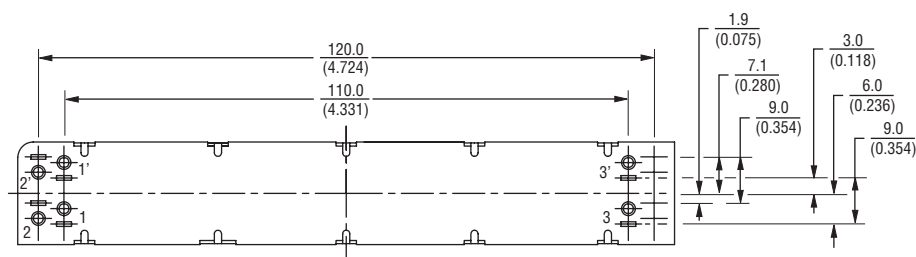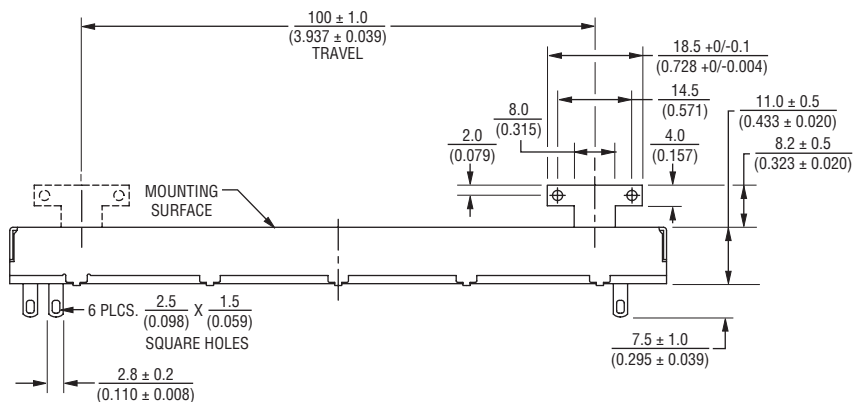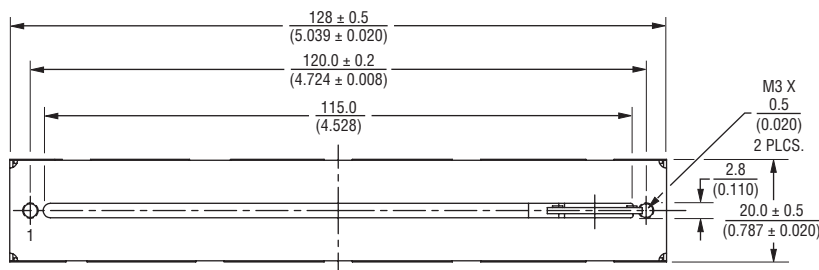


DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$


PTF Series Long Life Slide Potentiometer

BOURNS®


Lever End Styles



LEVER END STYLE "A"

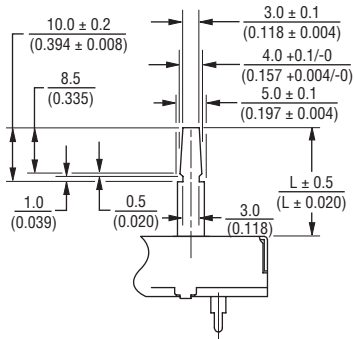

LEVER END STYLE "B"






LEVER END STYLE "T"

Lever Length (A & B Lever Only)

15.0
(.591)

20.0
(.787)

Tapers

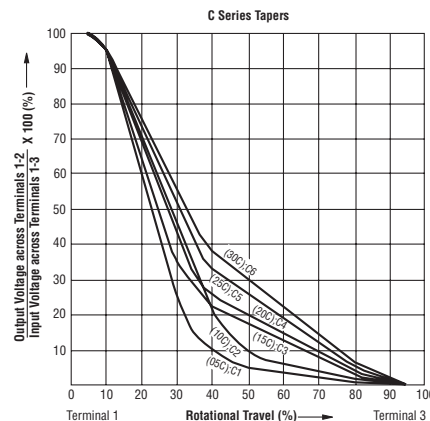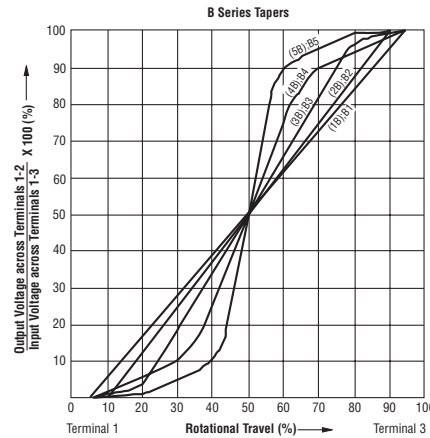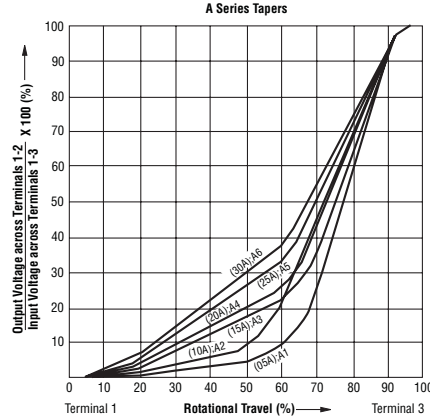

Standard Resistance Table

Resistance (Ohms)	Resistance Code
1,000	102
2,000	202
5,000	502
10,000	103
20,000	203
50,000	503
100,000	104
200,000	204
500,000	504
1,000,000	105

How To Order

PTF 45 - 15 2 A - 103 B2

Model Number

Designator

PTF = Long Life Slide
Potentiometer

Length of Travel

45 = 45 mm

60 = 60 mm

01 = 100 mm

Lever Length

08 = 8.2 mm ("T" Lever Only)

15 = 15 mm ("A" & "B" Lever
Only)

20 = 20 mm ("A" & "B" Lever
Only)

No. of Gangs

1 = Single Gang with PC Pins

2 = Dual Gang with PC Pins

3 = Single Gang with Solder Lugs

4 = Dual Gang with Solder Lugs

Lever End Style

A = Metal Lever (Refer to Drawing)

B = Metal Lever (Refer to Drawing)

T = Metal Lever (Refer to Drawing)

Resistance Code

(See Standard Resistance Table)

Resistance Taper (See Taper Charts)

Taper Series followed by Curve Number



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331