


# OS10040320PW

GaAs Optical Receiver  
40MHz to 1000MHz

The OS10040320PW is a hybrid high dynamic range optical receiver amplifier module. Two of the module pins are for connection to 24V (DC), one for amplifier supply voltage, the other for the PIN diode bias. The module contains a single mode optical input suitable for wavelengths from 1290nm to 1600nm, a terminal to monitor the PIN diode current, and an electrical output with an impedance of 75Ω.

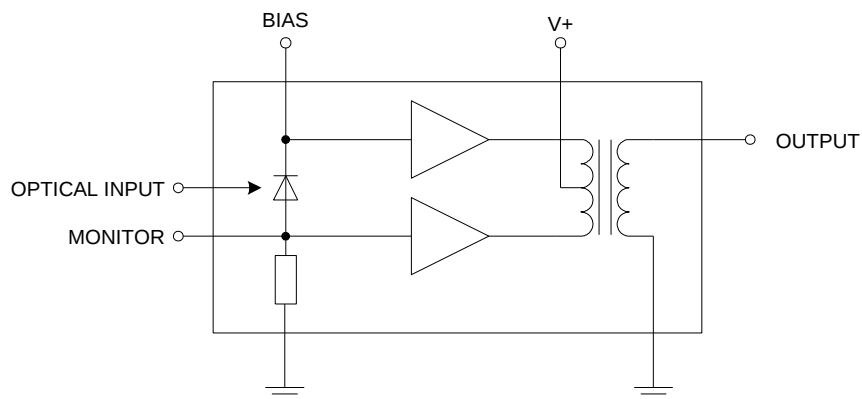

Package: SOT-115J

## Features

- Superior Return Loss Performance
- Extremely Low Distortion
- Optimal Reliability
- Very Low EINC
- Standard CATV Outline
- Excellent Flatness
- 260mA Max. at 24V+

## Applications

- 40MHz to 1000MHz CATV Amplifier Systems

## Ordering Information

|                  |                   |
|------------------|-------------------|
| OS10040320GW-012 | Box with 3 Pieces |
| OS10040320GW-013 | Box with 3 Pieces |
| OS10040320GW-014 | Box with 3 Pieces |
| OS10040320GW-015 | Box with 3 Pieces |
| OS10040320GW-016 | Box with 3 Pieces |
| OS10040320GW-017 | Box with 3 Pieces |

See Page 3

## Absolute Maximum Ratings

| Parameter                                                                                         | Rating     | Unit |
|---------------------------------------------------------------------------------------------------|------------|------|
| Frequency Range                                                                                   | 40 to 1000 | MHz  |
| Optical Input Power (continuous)                                                                  | 5          | mW   |
| ESD Sensitivity according to MIL Standard 1686C (Human Body Model; R = 1.5k $\Omega$ , C = 100pF) | 500        | V    |
| Storage Temperature                                                                               | -40 to +85 | °C   |
| Operating Mounting Base Temperature                                                               | -20 to +85 | °C   |
| Minimum Fiber Bending Radius                                                                      | 35         | mm   |
| Maximum Tensile Strength                                                                          | 5          | N    |



**Caution!** ESD sensitive device.



RoHS (Restriction of Hazardous Substances): Compliant per EU Directive 2011/65/EU.

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability. Specified typical performance or functional operation of the device under Absolute Maximum Rating conditions is not implied.

## Nominal Operating Parameters

| Parameter                              | Specification |      |      | Unit                   | Condition                                                                                                      |
|----------------------------------------|---------------|------|------|------------------------|----------------------------------------------------------------------------------------------------------------|
|                                        | Min           | Typ  | Max  |                        |                                                                                                                |
| <b>General Performance</b>             |               |      |      |                        | <b>V+ = 24V; T<sub>MB</sub> = 30°C; Z<sub>L</sub> = 75<math>\Omega</math></b>                                  |
| Responsivity                           | 3000          | 3150 |      | V/W                    | f = 1000MHz, $\lambda$ = 1310nm                                                                                |
| Slope <sup>[1]</sup>                   | 0             |      | 2.0  | dB                     | f = 40MHz to 1000MHz                                                                                           |
| Flatness of O/E Response               |               | <0.7 | 1.0  | dB                     | f = 40MHz to 1000MHz (measured peak to valley)                                                                 |
| Optical Input Return Loss              | 45.0          |      |      | dB                     |                                                                                                                |
| Output Return Loss                     | 15.0          | 17.0 |      | dB                     | f = 40MHz to 1000MHz                                                                                           |
| Equivalent Input Noise                 |               | 4.5  | 5.0  | pA/ $\sqrt{\text{Hz}}$ | f = 40MHz to 400MHz                                                                                            |
|                                        |               | 5.0  | 5.5  | pA/ $\sqrt{\text{Hz}}$ | f = 400MHz to 1000MHz                                                                                          |
| Spectral Sensitivity                   | 0.88          |      |      | A/W                    | $\lambda$ = (1310 $\pm$ 20)nm                                                                                  |
|                                        | 0.90          |      |      | A/W                    | $\lambda$ = (1550 $\pm$ 20)nm                                                                                  |
| Optical Wavelength                     | 1290          |      | 1600 | nm                     |                                                                                                                |
| Total Current Consumption (DC)         |               | 255  | 260  | mA                     | module pin 4 and 5 connected to V+                                                                             |
| Photodiode Bias Current                |               | 6.0  | 10.0 | mA                     |                                                                                                                |
| <b>Distortion Data</b>                 |               |      |      |                        | <b>V+ = 24V; T<sub>MB</sub> = 30°C; Z<sub>L</sub> = 75<math>\Omega</math></b>                                  |
| Second Order Distortion <sup>[2]</sup> |               | -75  | -70  | dBc                    | f <sub>m</sub> = 54MHz; f <sub>1</sub> = 187.25MHz; f <sub>2</sub> = 133.25MHz                                 |
|                                        |               | -72  | -67  | dBc                    | f <sub>m</sub> = 446.5MHz; f <sub>1</sub> = 97.25MHz; f <sub>2</sub> = 349.25MHz                               |
|                                        |               | -70  | -65  | dBc                    | f <sub>m</sub> = 548.5MHz; f <sub>1</sub> = 109.25MHz; f <sub>2</sub> = 439.25MHz                              |
|                                        |               | -65  | -61  | dBc                    | f <sub>m</sub> = 746.5MHz; f <sub>1</sub> = 133.25MHz; f <sub>2</sub> = 613.25MHz                              |
|                                        |               | -64  | -60  | dBc                    | f <sub>m</sub> = 854.5MHz; f <sub>1</sub> = 133.25MHz; f <sub>2</sub> = 721.25MHz                              |
| Third Order Distortion <sup>[3]</sup>  |               | -75  | -70  | dBc                    | f <sub>m</sub> = 55.25MHz; f <sub>1</sub> = 109.25MHz; f <sub>2</sub> = 133.25MHz; f <sub>3</sub> = 187.25MHz  |
|                                        |               | -75  | -70  | dBc                    | f <sub>m</sub> = 445.25MHz; f <sub>1</sub> = 193.25MHz; f <sub>2</sub> = 349.25MHz; f <sub>3</sub> = 97.25MHz  |
|                                        |               | -72  | -68  | dBc                    | f <sub>m</sub> = 547.25MHz; f <sub>1</sub> = 217.25MHz; f <sub>2</sub> = 439.25MHz; f <sub>3</sub> = 109.25MHz |
|                                        |               | -72  | -67  | dBc                    | f <sub>m</sub> = 745.25MHz; f <sub>1</sub> = 133.25MHz; f <sub>2</sub> = 265.25MHz; f <sub>3</sub> = 613.25MHz |
|                                        |               | -72  | -67  | dBc                    | f <sub>m</sub> = 853.25MHz; f <sub>1</sub> = 133.25MHz; f <sub>2</sub> = 265.25MHz; f <sub>3</sub> = 721.25MHz |



1. Slope is defined as the difference between the O/E response at the start frequency and the O/E response at the stop frequency.
2. Two laser test; each laser with 40% OMI; P<sub>opt</sub> = 1mW (total).
3. Three laser test: each laser with 60% OMI; P<sub>opt</sub> = 1mW (total).

## Cable Lengths and Connector Types


| Tab  | Dimension A |              |     |             | Optical Connector Type |
|------|-------------|--------------|-----|-------------|------------------------|
|      | Inches      | Tolerance    | mm  | Tolerance   |                        |
| -012 | 33.4        | -4 to +0.5   | 848 | -102 to +13 | FC/APC                 |
| -013 | 33.4        | -4 to +0.5   | 848 | -102 to +13 | SC/APC                 |
| -014 | 37.5        | -3.5 to +0.5 | 952 | -89 to +13  | FC/APC                 |
| -015 | 37.5        | -3.5 to +0.5 | 952 | -89 to +13  | SC/APC                 |
| -016 | 21.1        | -1.5 to +0.5 | 536 | -38 to +13  | FC/APC                 |
| -017 | 21.1        | -1.5 to +0.5 | 536 | -38 to +13  | SC/APC                 |

## Cable Lengths and Connector Types (continued)

| Tab  | Dimension B     |             |
|------|-----------------|-------------|
|      | Inches          | mm          |
| -012 | No outer jacket |             |
| -013 | No outer jacket |             |
| -014 | 0.325 to 0.550  | 8.3 to 14.0 |
| -015 | 0.325 to 0.550  | 8.3 to 14.0 |
| -016 | 0.325 to 0.550  | 8.3 to 14.0 |
| -017 | 0.325 to 0.550  | 8.3 to 14.0 |

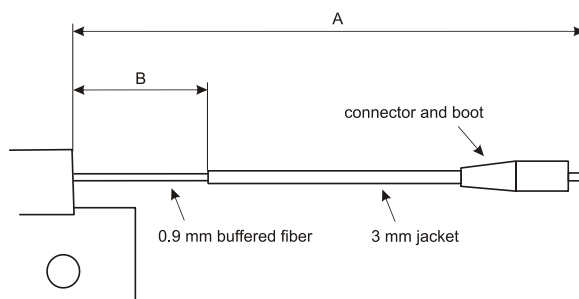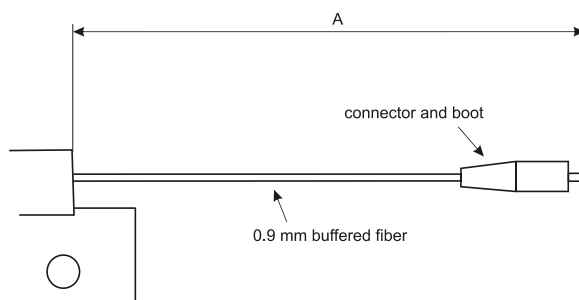


# Package Drawing (Dimensions in millimeters)

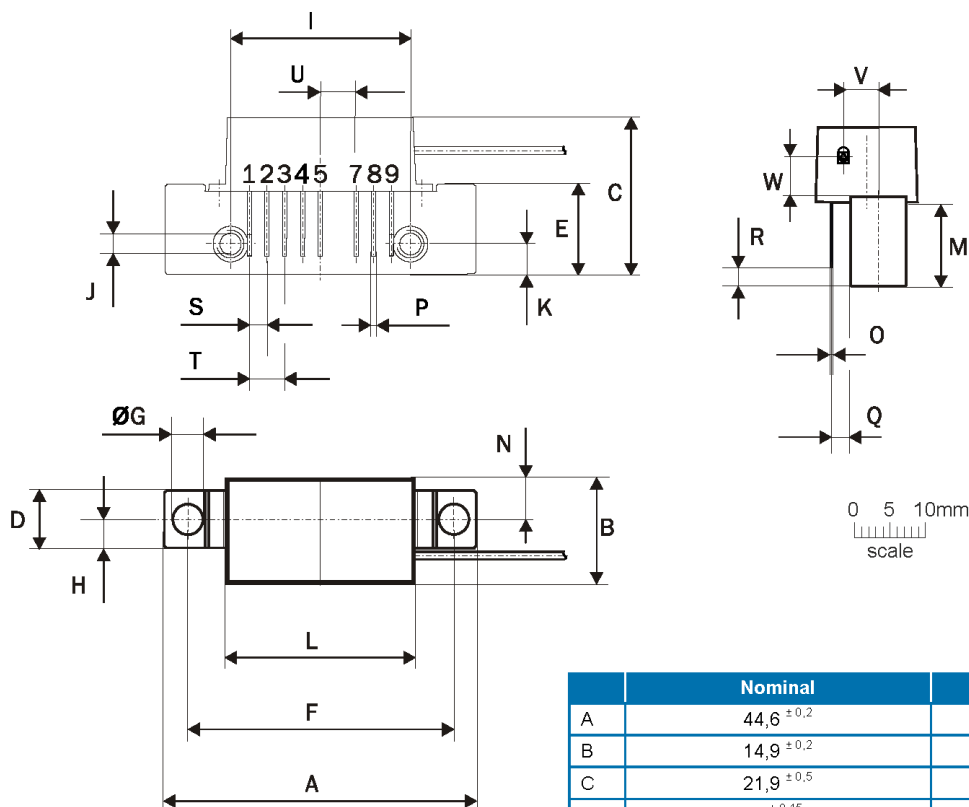

## Notes:

European  
Projection



## Pinning:

| Pin | Name                       |
|-----|----------------------------|
| 1   | PHOTODIODE CURRENT MONITOR |
| 2-3 | GND                        |
| 4   | PHOTODIODE BIAS            |
| 5   | V+                         |
| 6   |                            |
| 7-8 | GND                        |
| 9   | OUTPUT                     |

|   | Nominal          | Min   | Max   |
|---|------------------|-------|-------|
| A | 44,6 $\pm 0,2$   | 44,4  | 44,8  |
| B | 14,9 $\pm 0,2$   | 14,7  | 15,1  |
| C | 21,9 $\pm 0,5$   | 21,4  | 22,4  |
| D | 8 $\pm 0,15$     | 7,85  | 8,15  |
| E | 12,6 $\pm 0,15$  | 12,45 | 12,75 |
| F | 38,1 $\pm 0,2$   | 38,0  | 38,2  |
| G | 4 $+0,2 / -0,05$ | 3,95  | 4,2   |
| H | 4 $\pm 0,2$      | 3,8   | 4,2   |
| I | 25,4 $\pm 0,2$   | 25,2  | 25,6  |
| J | UNC 6-32         | -     | -     |
| K | 4,2 $\pm 0,2$    | 4,0   | 4,4   |
| L | 28,7 $\pm 0,2$   | 28,5  | 28,9  |
| M | 11,6 $\pm 0,5$   | 11,1  | 12,1  |
| N | 5,8 $\pm 0,4$    | 5,4   | 6,2   |
| O | 0,25 $\pm 0,02$  | 0,23  | 0,27  |
| P | 0,45 $\pm 0,03$  | 0,42  | 0,48  |
| Q | 2,54 $\pm 0,3$   | 2,24  | 2,84  |
| R | 2,54 $\pm 0,5$   | 2,04  | 3,04  |
| S | 2,54 $\pm 0,25$  | 2,29  | 2,79  |
| T | 5,08 $\pm 0,25$  | 4,83  | 5,33  |
| U | 5,08 $\pm 0,25$  | 4,83  | 5,33  |
| V | 5,0 $\pm 0,2$    | 4,8   | 5,2   |
| W | 5,35             |       |       |



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331