

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0736442116](#)
Status: **Active**
Overview: [hdm](#)
Description: 2.00mm (.079") Pitch HDM® Board-to-Board Backplane Header, Vertical, SMC, Press-Fit, Guide Post Location B, Polarizing Key Position N/A, 72 Circuits

Documents:
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA	LR19980
UL	E29179

General

Product Family	Backplane Connectors
Series	73644
Application	Backplane
Comments	Standard Press-Fit, Tin/Lead (SnPb)
Component Type	PCB Header
Overview	hdm
Product Name	HDM®
Style	N/A

Physical

Circuits (Loaded)	72
Circuits (maximum)	72
Color - Resin	Black, Natural
Durability (mating cycles max)	250
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	Yes
Keying to Mating Part	None
Material - Metal	Phosphor Bronze, Stainless Steel
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Number of Columns	12
Number of Pairs	Open Pin Field
Number of Rows	6
Orientation	Vertical
PC Tail Length (in)	0.138 In
PC Tail Length (mm)	3.50 mm
PCB Locator	No
PCB Retention	Yes
PCB Thickness Recommended (in)	0.098 In
PCB Thickness Recommended (mm)	2.50 mm
Packaging Type	Tube
Pitch - Mating Interface (in)	0.079 In
Pitch - Mating Interface (mm)	2.00 mm
Pitch - Term. Interface (in)	0.079 In
Pitch - Term. Interface (mm)	2.00 mm
Plating min: Mating (µin)	30
Plating min: Mating (µm)	0.75
Plating min: Termination (µin)	15
Plating min: Termination (µm)	0.375
Polarized to PCB	No



Series

image - Reference only

EU RoHS
RoHS Compliant by Exemption
REACH SVHC
Contains SVHC: No
Halogen-Free
Status
Not Reviewed

China RoHS

Pb

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[73644Series](#)

Mates With
[73632](#) HDM PLUS® Board-to-Board Daughtercard Receptacle. [73780](#) HDM® Board-to-Board Daughtercard Receptacle

Application Tooling FAQ	
Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.	
Global	
Description	Product #
Flat Rock Tooling for Pneumatic Press	0622013700
HDM® Backplane Insertion Signal Contact Tool	0621001400
Extraction Tool	0621001000

Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-55°C to +105°C
Termination Interface: Style	Through Hole - Compliant Pin

Electrical

Current - Maximum per Contact	1A
Data Rate	1.0 Gbps
Real Signals (per 25mm)	75
Shielded	No
Voltage - Maximum	250V AC

Material Info

Reference - Drawing Numbers

Packaging Specification	PK-70873-0818
Sales Drawing	SDA-73644-****



HDM and High Density Metric are trademarks of Amphenol Corporation

This document was generated on 05/14/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

NOTES:

1. MATERIALS: HOUSING - LIQUID CRYSTAL POLYMER (LCP), GLASS-FILLED, UL94V-0, COLOR: BLACK, TERMINAL - PHOSPHOR BRONZE.
2. FINISHES: SELECTIVE GOLD (Au) IN CONTACT AREA, 0.00076mm MINIMUM THICKNESS; NICKEL (Ni) AND GOLD FLASH OVERALL SELECTIVE GOLD (Au) IN CONTACT AREA, 0.00076mm MIN. THICKNESS; SELECTIVE TIN/LEAD (Sb/Pb) IN TAIL AREA; NICKEL (Ni) OVERALL.
3. THIS PART CONFORMS TO MOLEX PRODUCT SPECIFICATION PS-73670-9999.
4. FOR MIXED CONTACT MATING LENGTHS, CONSULT FACTORY FOR AVAILABILITY.
5. DIMENSIONS ARE IN MILLIMETERS.
6. FOR SPECIFIC MATERIAL NUMBERS, REFER TO SHEET 2.
7. PACKAGE PER PK-70873-0818.
8. PARTS MARKED WITH PART NUMBER AND DATE CODE, ON EITHER SIDE, APPROXIMATELY WHERE SHOWN.

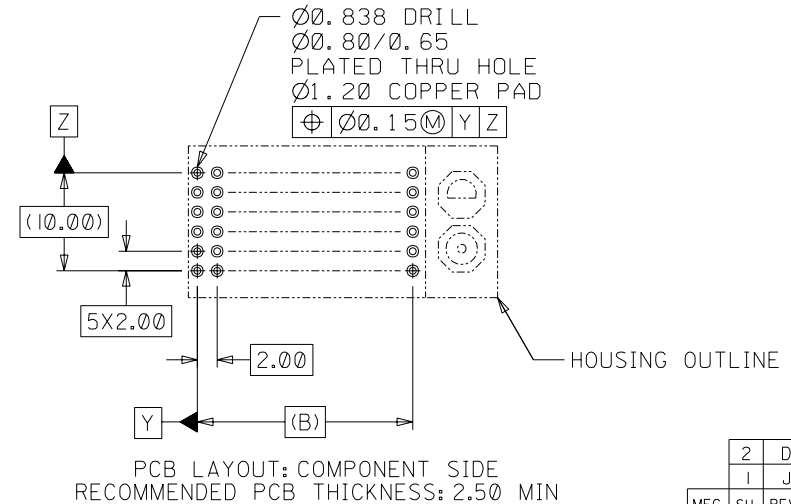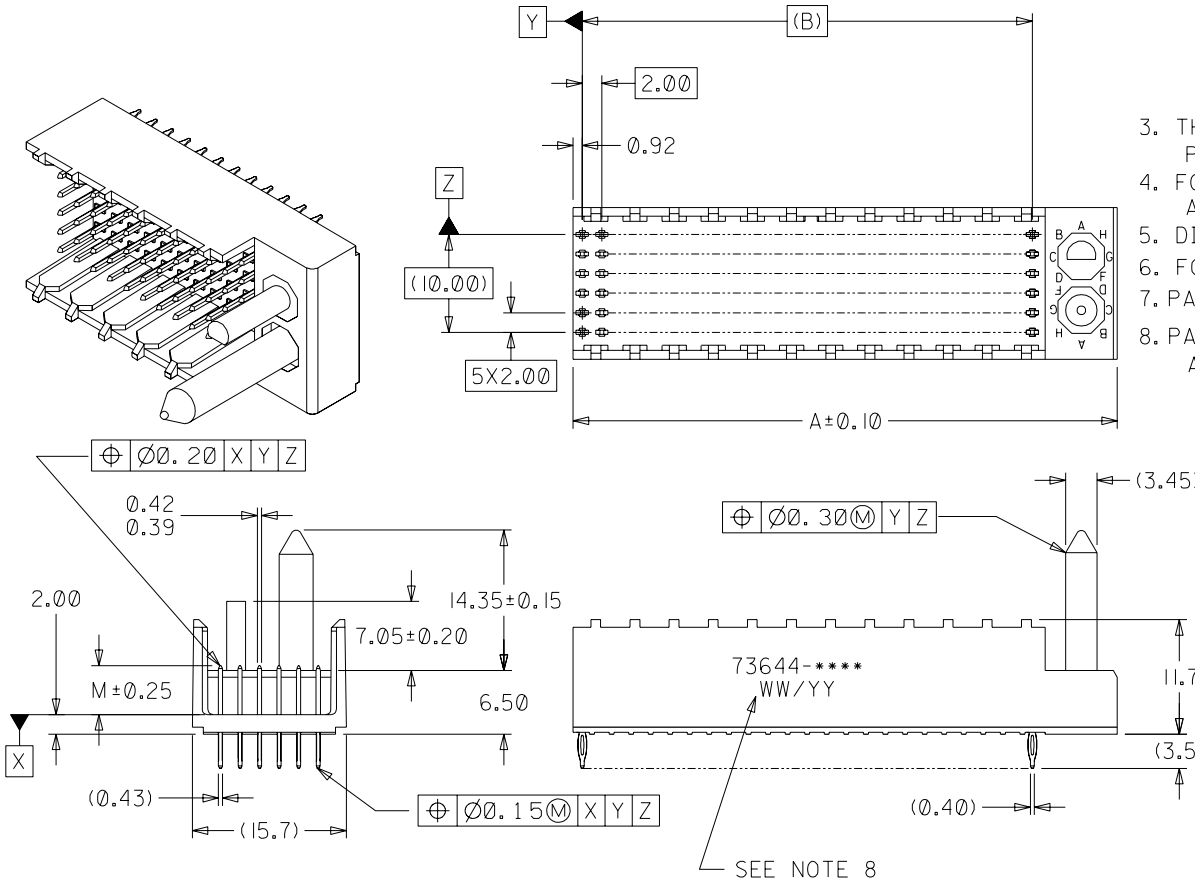

2	D
1	J
MFG.	SH.
REV.	

PCB LAYOUT: COMPONENT SIDE
RECOMMENDED PCB THICKNESS: 2.50 MIN

DIMENSIONS SHOWN (METRIC) INCH

UNLESS OTHERWISE SPECIFIED
TOLERANCES: ANGULAR ± 1/2°

	INCH	METRIC
3 PLACE	± N/A	---
2 PLACE	± N/A	± 0.05
1 PLACE	---	± 0.10

DRAFT WHERE APPLICABLE MUST
REMAIN WITHIN DIMENSIONS

DRWG. BY	JRR	CHK'D. BY	SMR
APP'D. BY	CAB	SCALE	2 : 1

REVISIONS ONLY ON CAD SYSTEM

TITLE

SALES ASSY, HDM BACKPLANE MODULE, POLAR/GUIDE OPTION	SHEET NO. 1 OF 2	DATE 96/12/18
---	---------------------	------------------

MOLEX INCORPORATED LITSE,ILL. 60532	PART NO. SDA-73644-****
FILE NAME S73644X1 DGN	DIV. DA
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.	SIZE B


10		9	8	7	6		7364
F	MATERIAL NUMBER	NUMBER OF SIGNAL CONTACTS	PLATING		DIM "A"	DIM "B"	DIM "M"
	73644-00**	72	SELECTIVE GOLD/GOLD FLASH		31.60	22.00	5.00
	73644-01**	72	SELECTIVE GOLD/GOLD FLASH		31.60	22.00	5.50
	73644-02**	72	SELECTIVE GOLD/GOLD FLASH		31.60	22.00	6.00
	73644-10**	144	SELECTIVE GOLD/GOLD FLASH		55.60	46.00	5.00
	73644-11**	144	SELECTIVE GOLD/GOLD FLASH		55.60	46.00	5.50
	73644-12**	144	SELECTIVE GOLD/GOLD FLASH		55.60	46.00	6.00
E	73644-20**	72	SELECTIVE GOLD/SELECTIVE TIN-LEAD		31.60	22.00	5.00
	73644-21**	72	SELECTIVE GOLD/SELECTIVE TIN-LEAD		31.60	22.00	5.50
	73644-22**	72	SELECTIVE GOLD/SELECTIVE TIN-LEAD		31.60	22.00	6.00
	73644-30**	144	SELECTIVE GOLD/SELECTIVE TIN-LEAD		55.60	46.00	5.00
	73644-31**	144	SELECTIVE GOLD/SELECTIVE TIN-LEAD		55.60	46.00	5.50
	73644-32**	144	SELECTIVE GOLD/SELECTIVE TIN-LEAD		55.60	46.00	6.00

MATERIAL NUMBER ASSIGNMENT


73644- * * * *

0 = 72-CIRCUIT, GOLD/GOLD FLASH
1 = 144-CIRCUIT, GOLD/GOLD FLASH
2 = 72-CIRCUIT, GOLD/TIN-LEAD
3 = 144-CIRCUIT, GOLD/TIN-LEAD

```
0 = 5.00 MATING LENGTH
1 = 5.50 MATING LENGTH
2 = 6.00 MATING LENGTH
```

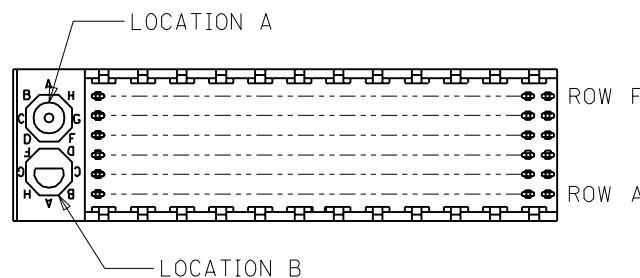

REF. MATERIAL NUMBER 73644-0009
GUIDE PIN IS IN LOCATION A
POLARIZING KEY IS IN LOCATION B. POSITION F

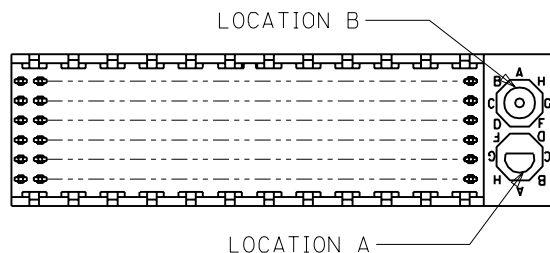

REF. MATERIAL NUMBER 73644-0008
GUIDE PIN IS IN LOCATION B
POLARIZING KEY IS IN LOCATION A, POSITION E

NUMBER	GUIDE POST LOCATION	POLAR KEY POSITION
00	B	A
01	A	
02	B	B
03	A	
04	B	C
05	A	
06	B	D
07	A	
08	B	E
09	A	
10	B	F
11	A	
12	B	G
13	A	
14	B	H
15	A	
16	B	N/A
17	A	
18	N/A	

A																	DIMENSIONS SHOWN (METRIC) INCH				▽ = 0 ▼ = 0 REVISE ONLY ON CAD SYSTEM																			
																	UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR = 1/2°				TITLE																			
																	<table><tr><td colspan="2">INCH</td><td colspan="2">METRIC</td></tr><tr><td>3 PLACE</td><td>± N/A</td><td colspan="2">---</td></tr><tr><td>2 PLACE</td><td>± N/A</td><td colspan="2">± N/A</td></tr><tr><td>1 PLACE</td><td>---</td><td colspan="2">± N/A</td></tr></table>				INCH		METRIC		3 PLACE	± N/A	---		2 PLACE	± N/A	± N/A		1 PLACE	---	± N/A					
	INCH		METRIC																																					
	3 PLACE	± N/A	---																																					
	2 PLACE	± N/A	± N/A																																					
	1 PLACE	---	± N/A																																					
																	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS																							
								D				SEE SHEET I																												
																<table><tr><td>DRWG. BY</td><td>JRR</td><td>CHK'D. BY</td><td>SMR</td></tr><tr><td>APP'D. BY</td><td>CAB</td><td>SCALE</td><td>-- : --</td></tr></table>				DRWG. BY	JRR	CHK'D. BY	SMR	APP'D. BY	CAB	SCALE	-- : --													
DRWG. BY	JRR	CHK'D. BY	SMR																																					
APP'D. BY	CAB	SCALE	-- : --																																					
LTR.				REVISIONS				LTR.				REVISIONS																												
10				9				8				7				6				5				4				3				2				1				



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331