


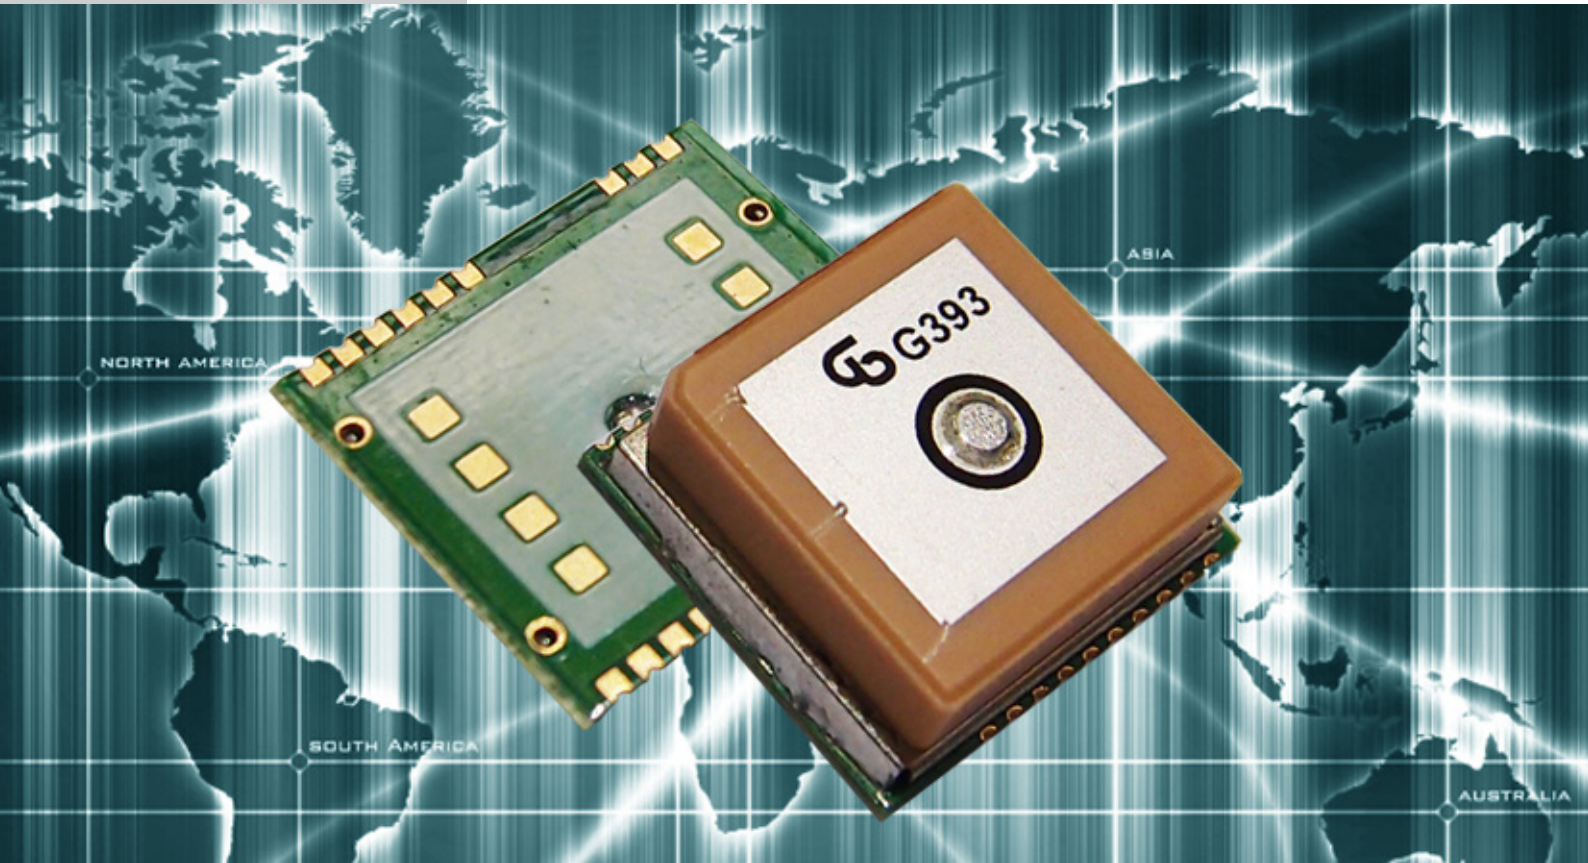

## A2135-H A2235-H

### Positioning Product

Fleet management  
Asset Tracking  
Vehicle Tracking  
Personal Tracking  
Portable Device

Integrated Antenna  
Low Power Consumption  
MEMS support



## Performance SiRFstarIV Integrated Solution The GPS Antenna Module Sub-System

The A2135-H (flash) and A2235-H (ROM) are Maestro Wireless Solutions answers to the most critical challenges in the GPS market: simplified integration, leading performance, and efficient time to market. The combination of the enhanced fully functional SiRFstar IV GPS engine and a custom-designed high directional patch antenna on board help to ease engineers integration effort of leading GPS technology into devices. The A2135-H and A2235-H fully address the demand for extreme low power operation and ultra-fast Time-To-First-Fix. Their high level of sensitivity allows for use in the most demanding environmental conditions.

### Features

### Benefits

|                                                             |   |                                |
|-------------------------------------------------------------|---|--------------------------------|
| SMT based integrated GPS antenna module                     | ■ | Lowest assembly cost           |
| 17.8 x 16.5 mm <sup>2</sup>                                 | ■ | Small footprint                |
| 29 mA average tracking (full power mode)                    | ■ | Ultra Low power consumption    |
| -163 dBm tracking                                           | ■ | Bench marking sensitivity      |
| up to 8 strongest interferes signals detected and mitigated | ■ | In-band jamming signal removal |

# Positioning Receiver Portfolio

With the mission to support our customers in implementing GNSS functionality into their systems, Maestro Wireless Solutions is offering a distinct product portfolio to address a wide area of applications. These range from traditional telematics solutions to latest highly integrated consumer devices, all of them having their special requirements towards a GNSS module. Based on SiRFstarIII and now also SiRFstarIV chip sets, Maestro Wireless Solutions GNSS module solutions address different specific needs and combine high performance, low power consumption, and simplified integration effort. Our modules comply with the RoHS standard and are 100% electrically and functionally tested prior to packaging, thereby assuring the guarantee of the highest quality products.




Ordering information:  
A2135-H410  
MOQ: 1 reel / 500 pcs

EVA2135-H Evaluation Board  
1 board + 2 samples

A2235-H  
MOQ: 1 reel / 500 pcs

EVA2235-H Evaluation Board  
1 board + 2 samples

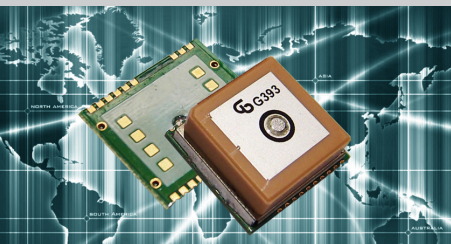

## Technical Details A2135-H / A2235-H

### PERFORMANCE

|                                |                                              |
|--------------------------------|----------------------------------------------|
| Channels                       | 48 parallel tracking                         |
| Correlators                    | 400,000 plus                                 |
| Frequency                      | L1 - 1,575 MHz                               |
| Sensitivity                    |                                              |
| Tracking                       | - 163 dBm                                    |
| Navigation                     | - 160 dBm                                    |
| Acquisition (cold start)       | - 148 dBm                                    |
| Position Accuracy (horizontal) | < 2.5 m CEP (autonomous)<br>< 2.0 m CEP SBAS |
| Time To First Fix              |                                              |
| Hot Start <sup>1)</sup>        | < 1 s                                        |
| Warm Start <sup>2)</sup>       | < 32 s                                       |
| Cold Start <sup>3)</sup>       | < 35 s                                       |
| Navigation                     |                                              |
| Update Rate                    | 1 Hz / 5 Hz Supported                        |

### COMMUNICATION

| UART - NMEA (Default)        |                                                                                                                  |
|------------------------------|------------------------------------------------------------------------------------------------------------------|
| NMEA message Switchable      | GGA, RMC, GSA, GSV, VTG, GLL, ZDA                                                                                |
| Baud rate Switchable         | 4,800 (default)<br>1,200 to 115.2k                                                                               |
| Ports                        | Tx (NMEA output)<br>Rx (NMEA input)                                                                              |
| UART - SiRF Specific SSB/OSP |                                                                                                                  |
| SiRFBinary protocol          | Protocol for SiRFstar product family up to SSIII                                                                 |
| One Socket Protocol          | Protocol extension for SiRFstarIV                                                                                |
| Baud rate Switchable         | 57.6k (default)<br>1,200 to 115.2k                                                                               |
| Ports                        | Tx (Binary output)<br>Rx (Binary input)                                                                          |
| SPI - NMEA/SiRF Specific     |                                                                                                                  |
| Clock                        | Up to 6.8 MHz                                                                                                    |
| Ports                        | DO (NMEA / Binary output)<br>DI (NMEA / Binary input)<br>SPI CLK (clock - input)<br>SPI CS (chip select - input) |

### HIGHLIGHTS

|                                   |                                                                                    |
|-----------------------------------|------------------------------------------------------------------------------------|
| SiRFNav™                          | High availability and coverage; improved TTFF in weak signal environments          |
| SiRFaware™                        | Keeps module in a state of readiness for rapid navigation (hot start)              |
| Jammer remover technology         | Detects and removes up to 8 in-band jammers with minimal loss of sensitivity       |
| A-GPS                             | Embedded Extended Ephemeris (SiRFInstantFix1) and Ephemeris Push support           |
| MEMS I2C interface                | Prepared to use additional sensor information for improved navigation              |
| Flash-based design (A2135-H only) | Prepared to store configuration and calibration data and to allow firmware updates |
| Internal antenna                  | Best matched build-in antenna for easy integration                                 |

### ENVIRONMENT

| Temperature |                |
|-------------|----------------|
| Operating   | -40°C to +85°C |
| Storage     | -40°C to +85°C |
| Humidity    |                |
|             | Non condensing |

### POWER

| Input voltage                      | 3.0 to 3.6 VDC<br>Nominal 3.3 VDC |         |
|------------------------------------|-----------------------------------|---------|
| Average current draw               | A2135-H                           | A2235-H |
| Full power mode (searching)        | 36 mA                             | 36 mA   |
| Full power mode (tracking)         | 24 mA                             | 22 mA   |
| PTF mode                           | 0.7 mA                            | 0.9 mA  |
| TricklePower™ Mode                 | 8.7 mA                            | 7.2 mA  |
| Hibernate                          | 27 µA                             | 27 µA   |
| Antenna supply via Vant            |                                   |         |
| Voltage range                      | up to 5.0V                        |         |
| Max. allowed current <sup>4)</sup> | 50 mA                             |         |

### MECHANICAL

| Dimensions |                      |
|------------|----------------------|
| L x W x H  | 17.8 x 16.5 x 7.1 mm |
| L x W x H  | 0.7" x 0.65" x 0.28" |
| Weight     | 4.0 g / 0.14 oz.     |

9th Floor, Wing Cheong Factory Building  
121 King Lam Street, Cheung Sha Wan  
Kowloon, Hong Kong  
Tel: (852) 2869 0688  
Fax: (852) 2525 4701  
contact@maestro-wireless.com  
www.maestro-wireless.com

1) The receiver has estimates of time/date/position and valid almanac and ephemeris data.  
2) The receiver has estimates of time/date/position and almanac.  
3) The receiver has no estimate of time/date/position, and no recent almanac.  
4) An external current limiter is suggested to avoid damage in fault conditions

The information provided herein is believed to be reliable at press time. Maestro Wireless Solutions assumes no responsibility for inaccuracies or omission. Maestro Wireless Solutions assumes no responsibility for the use of this information, and all such information shall be entirely at the users own risk. Prices and specifications are subject to change without notice. Maestro Wireless Solutions does not authorize or warrant any of its products for use in life support devices and/or systems. Images are for reference only.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331