



15 Watt Interchangeable Plug Series



Features

- Double Insulated
- Class B EMI
- Level VI Efficiency Compliant
- Limited Power Source (LPS)

Applications

- Wireless Communications
- Network Equipment
- Peripherals
- Gaming

Safety Approvals

- UL/cUL 60950-1
- UL/cUL 62368-1
- AS/NZ 60950-1
- IEC60950-1
- IEC62368-1
- CE

Mechanical Characteristics

- Length: 71.7mm (2.82in)
- Width: 50mm (1.97in)
- Height: 33.2mm (1.31in)
- Weight: 115g (4.06oz)

Output Specifications

Model	DC Output Voltage	Load		Ripple1 P-P (max.)
		Min.	Max.	
PSC15R-050-R	5V	0A	3.000A	100mV
PSC15R-060-R	5.9V	0A	2.500A	100mV
PSC15R-075-R	7.5V	0A	2.000A	100mV
PSC15R-090-R	9V	0A	1.67A	120mV
PSA15R-120P6-R	12V	0A	1.250A	100mV
PSA15R-150P6-R	15V	0A	1.000A	100mV
PSA15R-240P6-R	24V	0A	0.65A	200mV
PSA15R-480P6-R	48V	0A	0.313A	400mV

Notes:

1. Ripple measured by using a 12-inch twisted pair terminated with 10uF capacitor and 0.1uF ceramic in parallel with oscilloscope set to 20Mhz measured after a warm-up of 10minutes.

INPUT:**Input Voltage Rating**

100 to 240VAC

AC Input Voltage Range

90 to 264VAC

AC Input Current

0.5A (RMS), 120VAC at maximum load
 0.25A (RMS), 240VAC at maximum load

AC Input Frequency

47 to 63Hz

In-rush Current

<40A for 120VAC at maximum load
 <60A for 240VAC at maximum load
 (cold start at ambient 25°C)

Leakage Current

0.25mA maximum

Input Power Saving

100mW max @ 230V

OUTPUT**Output Power**

15W

Efficiency²

US DoE Level VI; EU CoC Ver5 Tier1
 ErP 2009/125/EC (EU 2019/1782)

Hold up time

8mS minimum at maximum load, 120VAC

ENVIRONMENTAL:**Temperature**

Operation 0°C to +40°C
 Non-operation -40°C to +85°C
 Humidity 20 to 90%

EMI

Complies with FCC class B
 Complies with EN55032 Class B

Immunity

EN61000-4-2
 EN61000-4-3
 EN61000-4-4
 EN61000-4-5 Level 3
 EN61000-4-6
 EN61000-4-11

Isolation (HI-POT test)

Input to Output: 3000VAC for 1 minute, 10mA

Insulation Resistance

Input to Output: 500VDC 500M Ohm minimum

FEATURES:**Over Current Protection**

>2A Short Circuit Auto-restart

Short Circuit Protection

Output can be shorted without damage

Over Voltage Protection

<13V

Dielectric Withstand (Hi-pot) Test

Pri. to Sec.: 3000V AC for 1 min., 10mA

DC Cord

1500mm (18~24AWG)

DC Output Connector (Tuning Fork Type)

5.5mm x 2.1mm x 10mm Center Positive

Interchangeable AC Clips

(Sold Separately)


RPA – US
 RPB – Brazil
 RPC – China
 RPE – Europe
 RPH – Korea
 RPI – India
 RPK – UK
 RPN – Argentina
 RPS – Australia
 RPX – IEC320 C8

Notes:

1. The characteristics defined are at ambient temperature of 25°C unless otherwise specified
2. Efficiency is measured after 30 minutes burn-in

PSX15R

Dimension Diagram Unit: mm

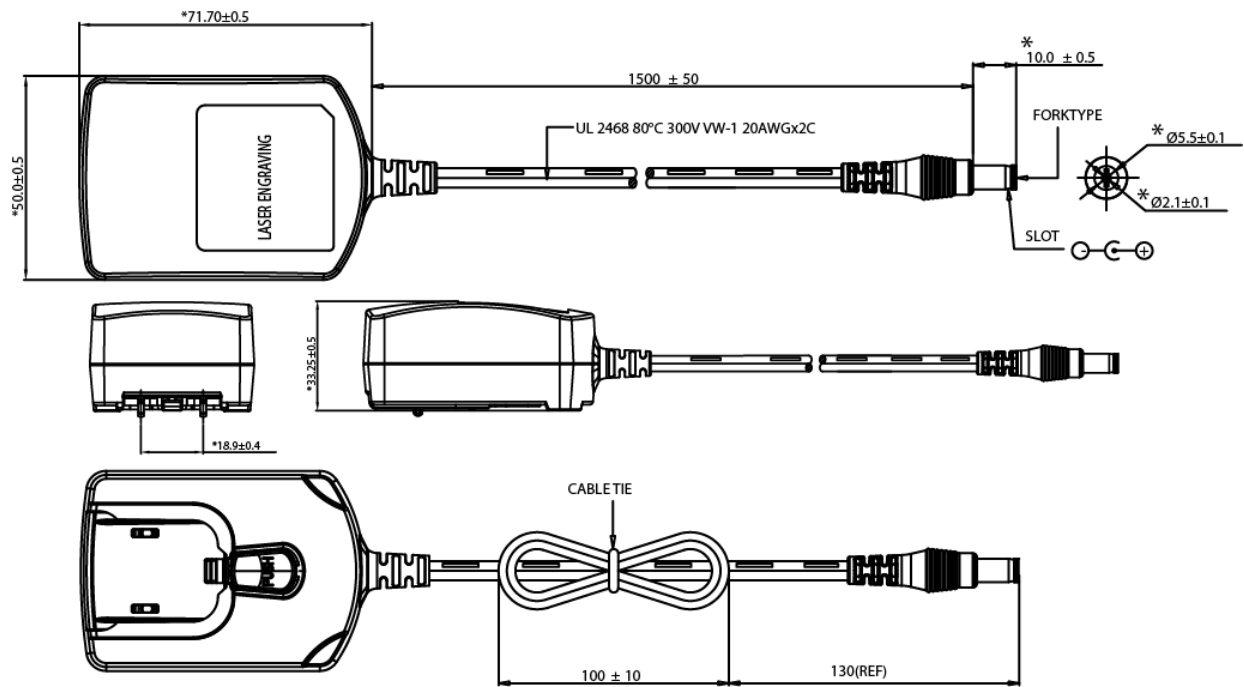

**Supplier's Declaration of Conformity
47 CFR § 2.1077 Compliance Information**

Phihong USA Corporation
47800 Fremont Boulevard
Fremont, CA 94538
Telephone: (510) 445-0100
www.phihong.com

NOTE: This model has/The models in this product series have been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications to equipment not expressly approved by PHIHONG could void the user's authority to operate the equipment.



Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331