

2/2/2005 10:02:00 AM

Typical Applications

Base Stations
 Test Equipment
 Telecom & Wireless Infrastructure
 Digital Switching

Features

9X14 J Leaded Surface Mount Package
 Reflow Process Compatible Optional
 LVPECL
 TRI-STATE

Operating Frequency

155.520 MHz

Operating Temperature Range

-40° to 85°C

Frequency stabilities

Parameter	Min	Typ	Max.	Units	Condition
Initial Accuracy	-50		+50	ppm	+25C

Supply voltage (Vs)

Parameter	Min	Typ	Max.	Units	Condition
Supply voltage	2.97	3.3	3.63	VDC	
Current consumption			100	mA	LVPECL No load

RF output

Parameter	Min	Typ	Max.	Units	Condition
Load			50	Ω	Into Vs-2V or Thevenin Equivalent
Signal Level (Vol)			Vs -1.62	VDC	
Signal Level (Voh)	Vs- 1.025			VDC	
Start-up Time			10	mS	
Rise and fall times			800	ps	Measured @ 10% to 90%
Duty cycle LVPECL	45		55	%	@ 50% Vdd

Frequency Tuning (EFC)

Parameter	Min	Typ	Max.	Units	Condition
Absolute Pull Range	-50		+50	ppm	All inclusive over operating temperature range of -40C to +85C and 15 year aging
Linearity			10	%	
Tuning Slope	Positive				
Control Voltage Range	0.3	1.65	3.0	VDC	with Vs=3.3VDC


Additional parameters

Parameter	Min	Typ	Max.	Units	Condition
Output Enable	Logic "0" or floating input = Outputs enabled Logic "1" input = Outputs disabled (Tri-state)				
Weight			<2	g	
Processing & Packing	Handling & processing note				

Absolute Maximum Ratings

Parameter	Min	Typ	Max.	Units	Condition
Supply voltage (Vs)			7.0	V	Vs=5.0VDC
			7.0	V	Vs=3.3VDC
Operable temperature range	-55		+85	°C	
Storage temperature range	-55		+125	°C	

Enclosure

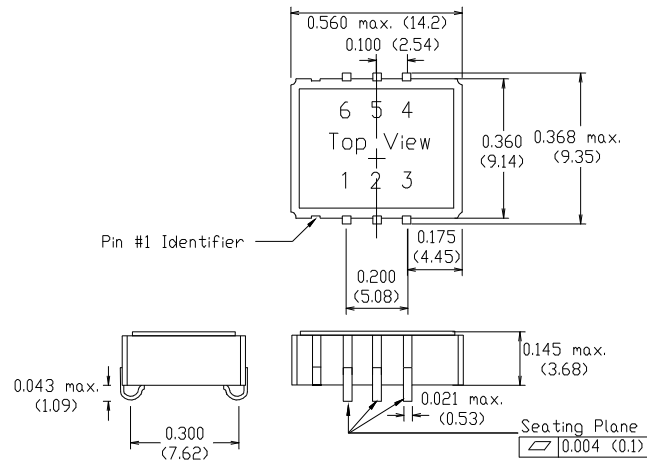

Pin Connections

- 1 Control Voltage
- 2 Enable/Disable or NC
- 3 Ground (Case)
- 4 RF Output
- 5 Complementary Output
- 6 Supply Voltage

Notes:

- 1 Unless otherwise stated all values are valid after warm-up time and refer to typical conditions for supply voltage, frequency control voltage, load, temperature (25°C)



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331