

# LDN80 Series

## 80W DIN Rail Switching Power Supply

LDN80 Series are single phase DIN Rail Switching Power Supplies, ideal for home automation, simple automation in machines, survey systems, telecom, but also the renewable energy field.

Its compact size, high efficiency, excellent reliability and excellent power/volume ratio, together with easy installation makes it ideal for various industrial and renewable applications.

LDN80 Series are Class II isolation devices suitable for SELV and PELV circuitry and are designed to be mounted on DIN rail and installed inside a protective enclosure.



### Key Features & Benefits

- Single phase AC input 90 - 264 VAC (110 - 345 VDC)
- High efficiency and compact size
- Class II, simplified wiring (no PE connection)
- Overload 150%
- High operating temperature with no derating
- Plastic enclosure, circuit breaker shape
- RoHS Compliant

### Applications

- Automation
- Telecom
- Survey Systems
- Renewable

## 1. MODEL SELECTION

MODEL	INPUT VOLTAGE	# of PHASES	OUTPUT VOLTAGE	OUTPUT CURRENT
LDN80-12	120 - 240 VAC (110 - 345 VDC)	1	12 - 15 VDC	6 - 5 A
LDN80-24	120 - 240 VAC (110 - 345 VDC)	1	24 VDC	3.3 A

## 2. INPUT SPECIFICATIONS

Technical parameters are typical, measured in laboratory environment at 25°C and 240 VAC / 50 Hz, at nominal values, after minimum 5 minutes of operation.

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Input AC Voltage Range	Rated, UL certified Operating	120 - 240 VAC 90 - 264 VAC
Input DC Voltage Range	Rated	110 - 345 VDC
Input Frequency Range		47 - 63 Hz
Input AC Current	LDN80-12	Vin = 120 VAC 1.50 A Vin = 240 VAC 0.85 A
	LDN80-24	Vin = 120 VAC 1.40 A Vin = 240 VAC 0.85 A
Input DC Current		Vin = 110 VDC 1.0 A Vin = 345 VDC 0.4 A
Inrush Peak Current		≤ 85 A
Touch (Leakage) Current		≤ 0.25 mA
Internal Protection Fuse	Not user replaceable	Fuse 2 AT
Recommended External Protection	It is strongly recommended to provide external surge arresters (SPD) according to local regulations	MCB 6A C curve

## 3. OUTPUT SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Output Power		80 W
Rated Voltage (Adjustable Voltage Range)	LDN80-12	12 - 15 VDC (12 - 15 VDC)
	LDN80-24	24 VDC (23 - 28 VDC)
Continuous Current	LDN80-12	6 - 5 A
	LDN80-24	3.3 A
Overload Limit	LDN80-12	7.5 A @ 12 VDC 6.5 A @ 15 VDC
	LDN80-24	4.0 A
Short Circuit Peak Current	LDN80-12	20 A
	LDN80-24	25 A
Load Regulation		≤ 0.5%
		≤ 1.0%
Ripple & Noise <sup>1</sup>	LDN80-12	≤ 100 mVpp
	LDN80-24	≤ 50 mVpp
Hold up Time		Vin = 120 VAC ≥ 10 ms Vin = 240 VAC ≥ 30 ms
	Protections	Overload/short circuit: Hiccup mode Thermal protection Output overvoltage
Status Signals	Green LED = DC OK	
Parallel Connection	Possible for redundancy (with external ORing module)	
Efficiency	LDN80-12	> 86%
	LDN80-24	> 87%
Dissipated Power	LDN80-12	< 12.5 W
	LDN80-24	< 12 W

<sup>1</sup> Ripple and Noise are measured with 20MHz bandwidth, probe terminated with a 0.1µF MKP parallel capacitor.

**NOTE:** Power rating, losses, efficiency, ripple, thermal behaviour and start-up may change outside of the nominal rated input range. Contact factory for details.

## 4. ENVIRONMENTAL, EMC & SAFETY SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Operating Temperature	UL certified up to 50°C for LDN80-12 and up 55°C for LDN80-24 (Start-up type tested: - 40°C) <sup>2</sup>	- 40 to + 70°C
Storage Temperature		- 40 to + 80°C
Derating	LDN80-12 LDN80-24	- 1.2 W / °C over 50°C - 0.9 W / °C over 55°C
Humidity	Non-condensing	5 - 95% RH
Life Time Expectancy	At 25°C ambient, full load	51136 h (5.8 years)
Overvoltage Category		III (EN50178)
Pollution Degree		2 (IEC60664-1)
Protection Class		Class II
Isolation Voltage	Input to Output	4.2 kVDC
Safety Standards & Approvals	UL508 (certified) EN60950 (reference) EN50178 (reference)	
EMC Emission	EN55011 (CISPR11) EN55022 (CISPR22)	Class A Class A
EMC Immunity	EN61000-4-2	Level 3
	EN61000-4-3	Level 3
	EN61000-4-4	Level 3
	EN61000-4-5	Level 3
	EN61000-4-11	Level 2
Protection Degree	EN60529	IP20
Vibration sinusoidal	IEC 60068-2-6	5 - 17.8 Hz: ±1.6 mm; 17.8 - 500 Hz: 2 g 2 Hours / axis (X, Y, Z)
Shock	IEC 60068-2-27	30 g 6 ms, 20 g 11 ms; 3 bumps / direction, 18 bumps total

<sup>2</sup> Possible with load derating

## 5. PIN LAYOUT & DESCRIPTION



PIN	DESCRIPTION
1	AC/DC input
2	DC output (load)
3	Green LED: Output OK
4	Output voltage adjustment

INPUT CONNECTION	OUTPUT CONNECTION
Single phase: L = Line (2) N = Neutral (1)	+ = Positive DC (12) - = Negative DC (11)
DC: L = +/- (2) N = -/+ (1)	

## 6. MECHANICAL SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Weight		230 g
Dimensions (W x H x D)		72 x 90 x 61.5 mm
Mounting Rail		IEC 60715/H15/TH35-7.5(-15)
Connection Terminals	Screw type Header (24 - 12 AWG)	2.5 mm <sup>2</sup>
Case Material	ABS, Flame retardant UL94 V-0	

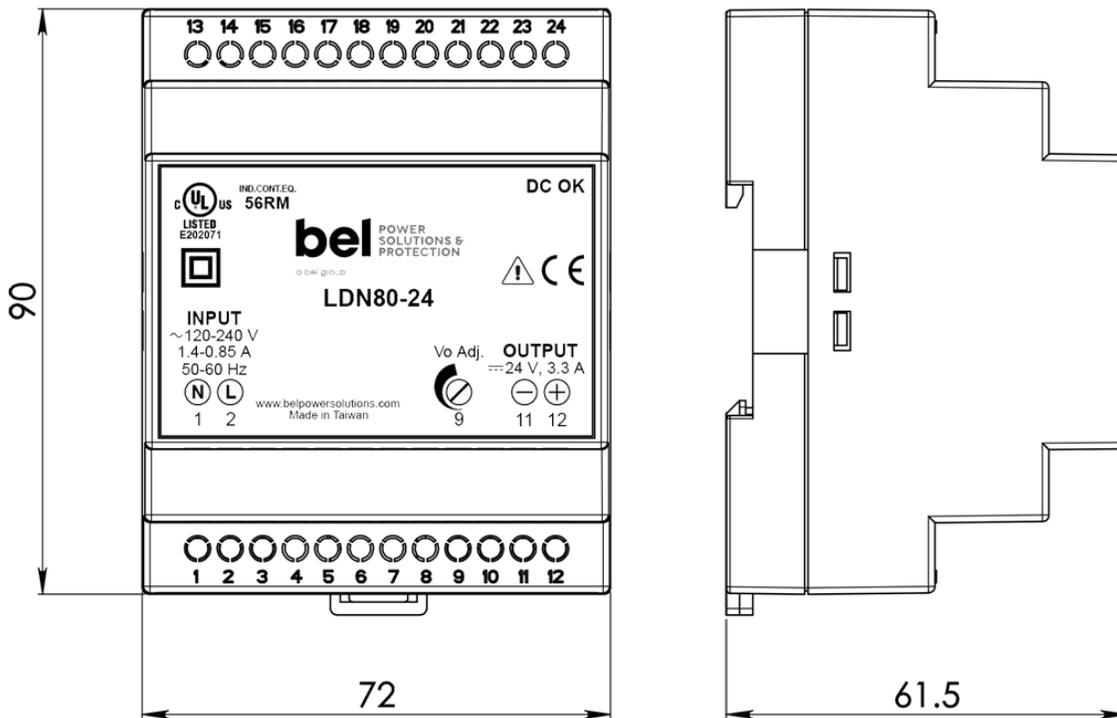


Figure 1. Mechanical Drawing

**For more information on these products consult: [tech.support@psbel.com](mailto:tech.support@psbel.com)**

**NUCLEAR AND MEDICAL APPLICATIONS** - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

**TECHNICAL REVISIONS** - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331