


# LUXEON M

Brightest, most uniform and highest efficacy multi-die emitter

LUXEON M is an illumination grade multi-die LED designed to enable outdoor and industrial applications targeting either high efficiency or low cost. With *Freedom from Binning* and leading performance, LUXEON M falls within a single 3- or 5-step MacAdam ellipse centered in ANSI to ensure color consistency from LED to LED, delivering high efficacy and high flux density from a uniform source with tight correlated color temperature control. The superior quality of light, volume of lumens, and real world efficacy enable leading performance and efficient solution development in a wide variety of lighting segments.

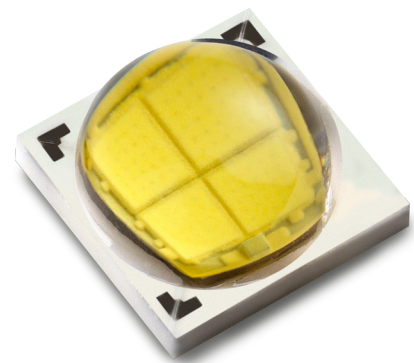

## FEATURES AND BENEFITS

- Uniform image enables tight beam control in MR16 and spotlight applications
- High flux density from a 3mm<sup>2</sup> area enables reduced emitter count and compact fixture designs
- 11.2V, 5.6V and 2.8V package options puts high performance within reach with high efficiency and low cost drivers
- Leading thermal resistance allows flexible system design to optimize for lm/\$ and lm/W
- Exceeds ENERGY STAR® lumen maintenance requirements

## PRIMARY APPLICATIONS

- Architectural
- High Bay & Low Bay
- Lamps
- Outdoor
- Specialty Lighting
- Spotlights

# Table of Contents

|                                             |           |
|---------------------------------------------|-----------|
| <b>General Product Information</b>          | <b>2</b>  |
| Product Test Conditions                     | 2         |
| Part Number Nomenclature                    | 2         |
| Lumen Maintenance                           | 2         |
| Environmental Compliance                    | 2         |
| <b>Performance Characteristics</b>          | <b>3</b>  |
| Product Selection Guide                     | 3         |
| Optical Characteristics                     | 4         |
| Electrical and Thermal Characteristics      | 4         |
| <b>Absolute Maximum Ratings</b>             | <b>5</b>  |
| Operating Conditions                        | 5         |
| <b>Characteristic Curves</b>                | <b>6</b>  |
| Spectral Power Distribution Characteristics | 6         |
| Light Output Characteristics                | 8         |
| Forward Current Characteristics             | 10        |
| Radiation Pattern Characteristics           | 12        |
| <b>Product Bin and Labeling Definitions</b> | <b>13</b> |
| Decoding Product Bin Labeling               | 13        |
| Luminous Flux Bins                          | 14        |
| Radiometric Power Bins                      | 14        |
| Color Bin Definition                        | 15        |
| Dominant Wavelength Bins                    | 15        |
| Forward Voltage Bins                        | 16        |
| <b>Mechanical Dimensions</b>                | <b>16</b> |
| <b>Reflow Soldering Guidelines</b>          | <b>17</b> |
| JEDEC Moisture Sensitivity                  | 17        |
| Solder Pad Design                           | 18        |
| <b>Packaging Information</b>                | <b>19</b> |
| Pocket Tape Dimensions                      | 19        |
| Reel Dimensions                             | 20        |

# General Product Information

## Product Test Conditions

LUXEON M LEDs are tested and binned with a DC drive current of 700mA for LUXEON M 12V, 1400mA for LUXEON M 6V and 2800mA for LUXEON M 3V at a junction temperature,  $T_j$ , of 85°C.

## Part Number Nomenclature

Part numbers for LUXEON M follow the convention below:

L X R **A - B C D D - E E E E**

Where:

- A** – designates minimum CRI (7=70, 8=80, 9=90, 0=Royal Blue)
- B** – designates voltage (S=12V, R=6V, Q=3V)
- C** – designates color (W=White, R=Royal Blue)
- D D** – designates CCT (27=2700K, 30=3000K, 35=3500K, 40=4000K, 50=5000K, 57=5700K, 65=6500K, 00=Royal Blue)
- E E E E** – designates minimum luminous flux (optional)

Therefore, the following part number is used for a white LUXEON M 12V 3000K 80CRI:

L X R **8 - S W 3 0 - x x x x**

## Lumen Maintenance

Please contact your local Sales Representative or Lumileds Technical Solutions Manager for more information about the long-term performance of this product.

## Environmental Compliance

Lumileds LLC is committed to providing environmentally friendly products to the solid-state lighting market. LUXEON M is compliant to the European Union directives on the restriction of hazardous substances in electronic equipment, namely the RoHS Directive 2011/65/EU and REACH Regulation (EC) 1907/2006. Lumileds LLC will not intentionally add the following restricted materials to its products: lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE).

# Performance Characteristics

## Product Selection Guide

Table 1a. Product performance for LUXEON M White at test current,  $T_j=85^\circ\text{C}$ .

| VOLTAGE | NOMINAL CCT <sup>[2]</sup> | MINIMUM CRI | LUMINOUS FLUX <sup>[1]</sup> (lm) |         | TEST CURRENT (mA) | PART NUMBER |
|---------|----------------------------|-------------|-----------------------------------|---------|-------------------|-------------|
|         |                            |             | MINIMUM                           | TYPICAL |                   |             |
| 12V     | 3000K                      | 70          | 900                               | 1000    | 700               | LXR7-SW30   |
|         | 4000K                      | 70          | 970                               | 1076    | 700               | LXR7-SW40   |
|         | 5000K                      | 70          | 1040                              | 1100    | 700               | LXR7-SW50   |
|         | 5700K                      | 70          | 1040                              | 1110    | 700               | LXR7-SW57   |
|         | 6500K                      | 70          | 1040                              | 1130    | 700               | LXR7-SW65   |
|         | 2700K                      | 80          | 730                               | 800     | 700               | LXR8-SW27   |
|         | 3000K                      | 80          | 780                               | 850     | 700               | LXR8-SW30   |
|         | 3500K                      | 80          | 780                               | 870     | 700               | LXR8-SW35   |
|         | 4000K                      | 80          | 840                               | 905     | 700               | LXR8-SW40   |
|         | 5000K                      | 80          | 840                               | 920     | 700               | LXR8-SW50   |
|         | 2700K                      | 90          | 600                               | 660     | 700               | LXR9-SW27   |
|         | 3000K                      | 90          | 640                               | 736     | 700               | LXR9-SW30   |
|         | 5700K                      | 90          | 800                               | 880     | 700               | LXR9-SW57   |
| 6V      | 3000K                      | 70          | 900                               | 1000    | 1400              | LXR7-RW30   |
|         | 4000K                      | 70          | 970                               | 1076    | 1400              | LXR7-RW40   |
|         | 5000K                      | 70          | 1040                              | 1100    | 1400              | LXR7-RW50   |
|         | 5700K                      | 70          | 1040                              | 1110    | 1400              | LXR7-RW57   |
|         | 6500K                      | 70          | 1040                              | 1130    | 1400              | LXR7-RW65   |
|         | 2700K                      | 80          | 730                               | 800     | 1400              | LXR8-RW27   |
|         | 3000K                      | 80          | 780                               | 850     | 1400              | LXR8-RW30   |
|         | 3500K                      | 80          | 780                               | 870     | 1400              | LXR8-RW35   |
|         | 4000K                      | 80          | 840                               | 920     | 1400              | LXR8-RW40   |
|         | 5000K                      | 80          | 840                               | 920     | 1400              | LXR8-RW50   |
|         | 2700K                      | 90          | 600                               | 660     | 1400              | LXR9-RW27   |
|         | 3000K                      | 90          | 640                               | 736     | 1400              | LXR9-RW30   |
|         | 5700K                      | 90          | 800                               | 880     | 1400              | LXR9-RW57   |
| 3V      | 3000K                      | 70          | 900                               | 1000    | 2800              | LXR7-QW30   |
|         | 4000K                      | 70          | 970                               | 1076    | 2800              | LXR7-QW40   |
|         | 5000K                      | 70          | 1040                              | 1100    | 2800              | LXR7-QW50   |
|         | 5700K                      | 70          | 1040                              | 1110    | 2800              | LXR7-QW57   |
|         | 6500K                      | 70          | 1040                              | 1130    | 2800              | LXR7-QW65   |
|         | 2700K                      | 80          | 730                               | 800     | 2800              | LXR8-QW27   |
|         | 3000K                      | 80          | 780                               | 850     | 2800              | LXR8-QW30   |
|         | 3500K                      | 80          | 780                               | 870     | 2800              | LXR8-QW35   |
|         | 4000K                      | 80          | 840                               | 920     | 2800              | LXR8-QW40   |
|         | 5000K                      | 80          | 840                               | 920     | 2800              | LXR8-QW50   |
|         | 2700K                      | 90          | 600                               | 660     | 2800              | LXR9-QW27   |
|         | 3000K                      | 90          | 640                               | 736     | 2800              | LXR9-QW30   |
|         | 5700K                      | 90          | 800                               | 880     | 2800              | LXR9-QW57   |

**Notes for Table 1a:**

1. Lumileds maintains a tolerance of  $\pm 2$  on CRI and  $\pm 6.5\%$  on luminous flux measurements.
2. Typical CRI is approximately 2 points higher than the minimum CRI specified, but this is not guaranteed.

Table 1b. Product performance for LUXEON M Royal Blue at test current,  $T_j=85^\circ\text{C}$ .

| VOLTAGE | DOMINANT WAVELENGTH (nm) |         | RADIOMETRIC POWER (mW) |         | TEST CURRENT (mA) | PART NUMBER |
|---------|--------------------------|---------|------------------------|---------|-------------------|-------------|
|         | MINIMUM                  | MAXIMUM | MINIMUM                | TYPICAL |                   |             |
| 12V     | 445                      | 460     | 4200                   | 4500    | 700               | LXR0-SR00   |
| 6V      | 445                      | 460     | 4200                   | 4500    | 1400              | LXR0-RR00   |
| 3V      | 445                      | 460     | 4200                   | 4500    | 2800              | LXR0-QR00   |

**Notes for Table 1b:**

1. Lumileds maintains a tolerance of  $\pm 6.5\%$  on radiometric power measurements.

## Optical Characteristics

Table 2. Optical characteristics for LUXEON M at test current,  $T_j=85^\circ\text{C}$ .

| PART NUMBER | TYPICAL TOTAL INCLUDED ANGLE <sup>[1]</sup> | TYPICAL VIEWING ANGLE <sup>[2]</sup> |
|-------------|---------------------------------------------|--------------------------------------|
| LXRx-xxxx   | 140°                                        | 120°                                 |

Notes for Table 2:

1. Total angle at which 90% of total luminous flux is captured.
2. Viewing angle is the off axis angle from the LED centerline where the luminous intensity is ½ of the peak value.

## Electrical and Thermal Characteristics

Table 3. Electrical and thermal characteristics for LUXEON M at test current,  $T_j=85^\circ\text{C}$ .

| PART NUMBER | FORWARD VOLTAGE (V) <sup>[1]</sup> |         |         | TYPICAL TEMPERATURE<br>COEFFICIENT OF FORWARD<br>VOLTAGE (mV/°C) <sup>[2]</sup> | TYPICAL THERMAL<br>RESISTANCE — JUNCTION<br>TO SOLDER PAD (°C/W) |
|-------------|------------------------------------|---------|---------|---------------------------------------------------------------------------------|------------------------------------------------------------------|
|             | MINIMUM                            | TYPICAL | MAXIMUM |                                                                                 |                                                                  |
| LXRx-Sxxx   | 10.50                              | 11.20   | 11.70   | -5.50                                                                           | 1.25                                                             |
| LXRx-Rxxx   | 5.25                               | 5.60    | 6.00    | -2.75                                                                           | 1.25                                                             |
| LXRx-Qxxx   | 2.63                               | 2.80    | 3.00    | -1.38                                                                           | 1.25                                                             |

Notes for Table 3:

1. Lumileds maintains a tolerance of  $\pm 0.06\text{V}$  on forward voltage measurements.
2. Measured between  $25^\circ\text{C}$  and  $135^\circ\text{C}$ .

# Absolute Maximum Ratings

Table 4. Absolute maximum ratings for LUXEON M.

| PARAMETER                                                         | MAXIMUM PERFORMANCE                                                                                                                                                                 |
|-------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DC Forward Current at $T_j=110^{\circ}\text{C}$ <sup>[1][2]</sup> | 1200mA for LXR <sub>x</sub> -SWxx<br>2400mA for LXR <sub>x</sub> -RWxx<br>4800mA for LXR <sub>x</sub> -QWxx                                                                         |
| DC Forward Current at $T_j=135^{\circ}\text{C}$ <sup>[1][2]</sup> | 1050mA for LXR <sub>x</sub> -Sxxx<br>2100mA for LXR <sub>x</sub> -Rxxx<br>4200mA for LXR <sub>x</sub> -Qxxx                                                                         |
| Peak Pulsed Forward Current <sup>[3]</sup>                        | 1375mA for LXR <sub>x</sub> -SWxx<br>2750mA for LXR <sub>x</sub> -RWxx<br>5500mA for LXR <sub>x</sub> -QWxx<br>1200mA for LXR0-SR00<br>2400mA for LXR0-RR00<br>4800mA for LXR0-QR00 |
| LED Junction Temperature (DC & Pulse)                             | -40°C to 135°C                                                                                                                                                                      |
| ESD Sensitivity (ANSI/ESDA/JEDEC JS-001-2012)                     | Class 3B                                                                                                                                                                            |
| Operating Case Temperature <sup>[1]</sup>                         | 120°C                                                                                                                                                                               |
| Storage Temperature                                               | -40°C to 120°C                                                                                                                                                                      |
| Soldering Temperature                                             | JEDEC 020c 260°C                                                                                                                                                                    |
| Allowable Reflow Cycles                                           | 3                                                                                                                                                                                   |
| Reverse Voltage ( $V_{\text{reverse}}$ )                          | LUXEON LEDs are not designed to be driven in reverse bias                                                                                                                           |

**Notes for 4:**

- See Figure 1 for more details on the maximum permissible operating conditions for LUXEON M White.
- Residual periodic variations due to power conversion from alternating current (AC) to direct current (DC), also called "ripple", are acceptable if the following conditions are met:
  - The frequency of the ripple current is 100Hz or higher
  - The average current for each cycle does not exceed the maximum allowable DC forward current at this junction temperature
  - The maximum amplitude of the ripple does not exceed 15% of the maximum allowable DC forward current at this junction temperature
- At 10% duty cycle with pulse width of 10ms.

## Operating Conditions

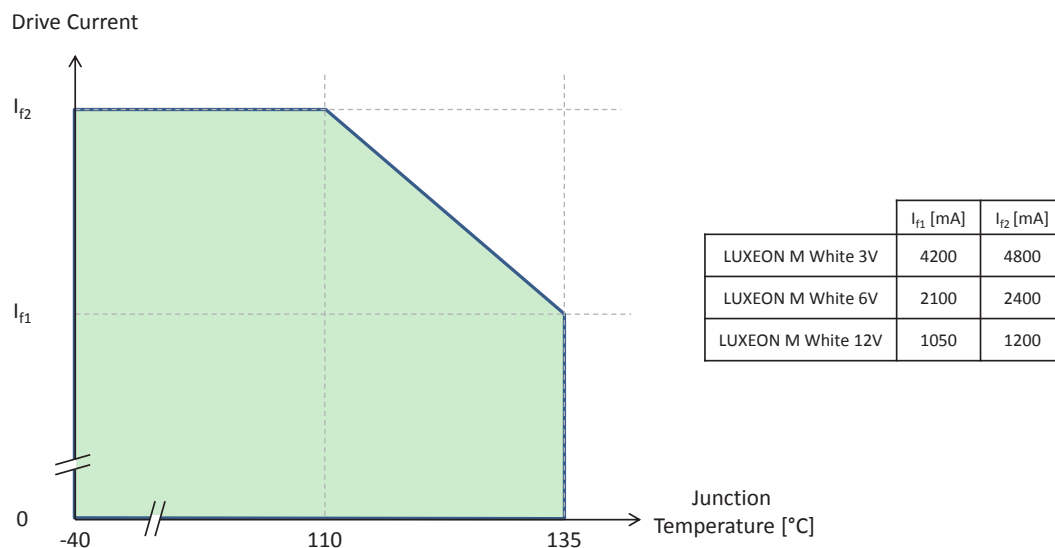


Figure 1: Maximum permissible operating conditions for LUXEON M White.

**Notes for Figure 1:**

- The green shaded area in this graph reflects the maximum permissible operating conditions for LUXEON M White.

# Characteristic Curves

## Spectral Power Distribution Characteristics

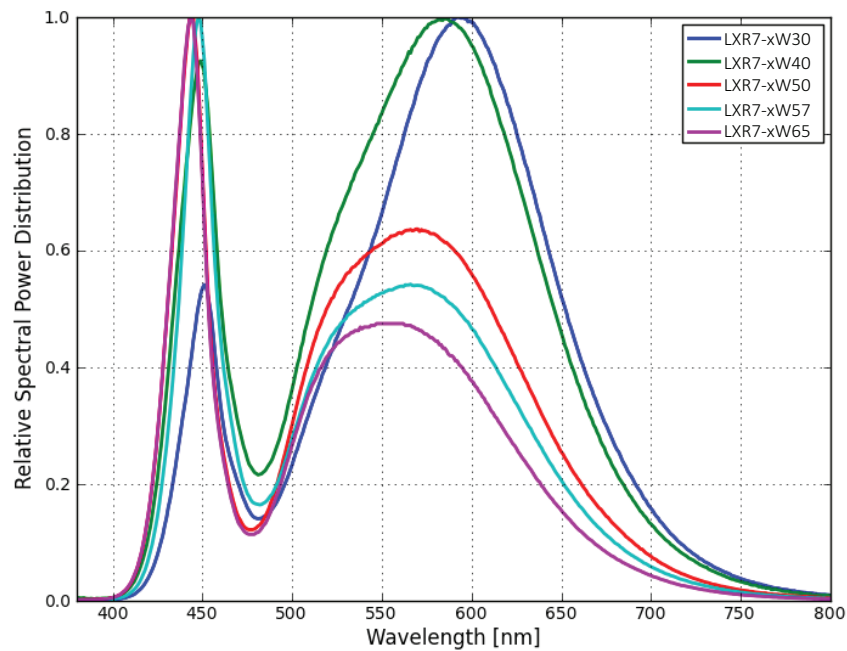


Figure 2a: Typical normalized power vs. wavelength for LXR7-xWxx at test current,  $T_j=85^{\circ}\text{C}$ .

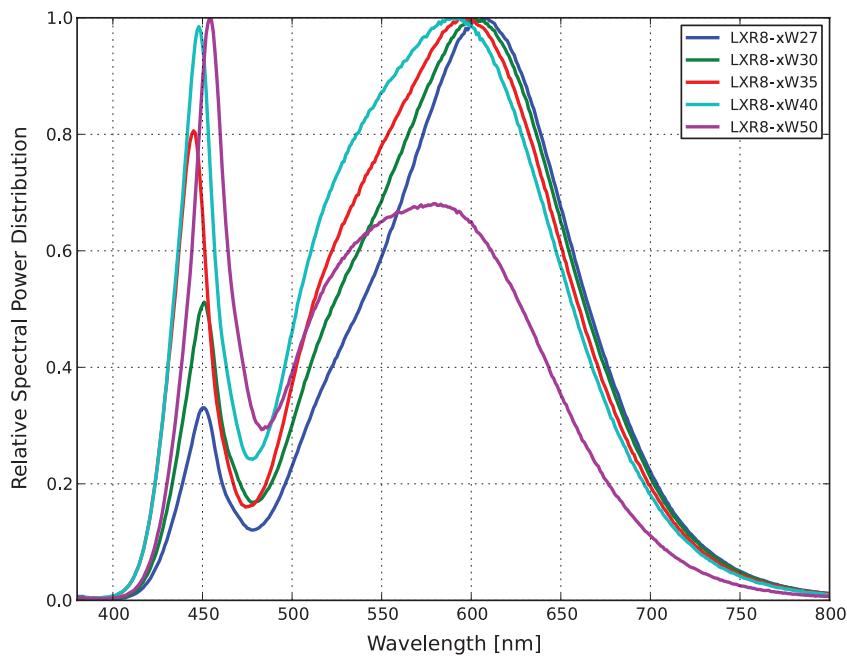


Figure 2b: Typical normalized power vs. wavelength for LXR8-xWxx at test current,  $T_j=85^{\circ}\text{C}$ .

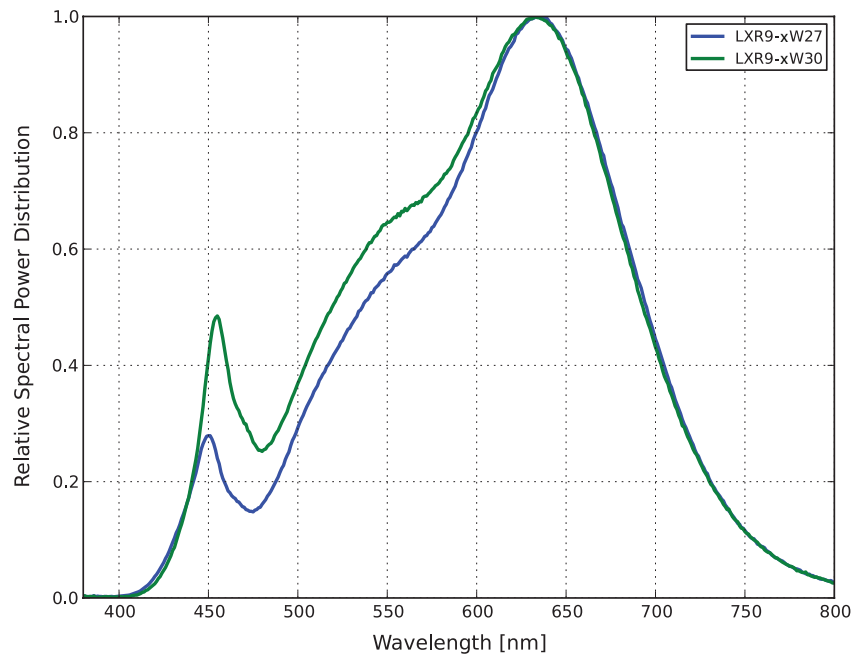


Figure 2c: Typical normalized power vs. wavelength for LXR9-xWxx at test current,  $T_j=85^{\circ}\text{C}$ .

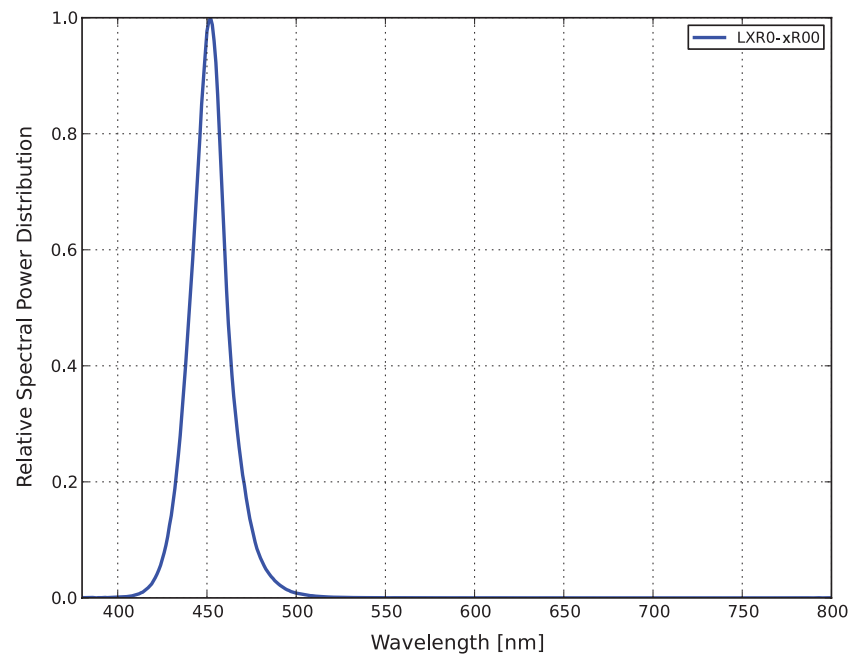


Figure 2d: Typical normalized power vs. wavelength for LXR0-xR00 at test current,  $T_j=85^{\circ}\text{C}$ .

# Light Output Characteristics

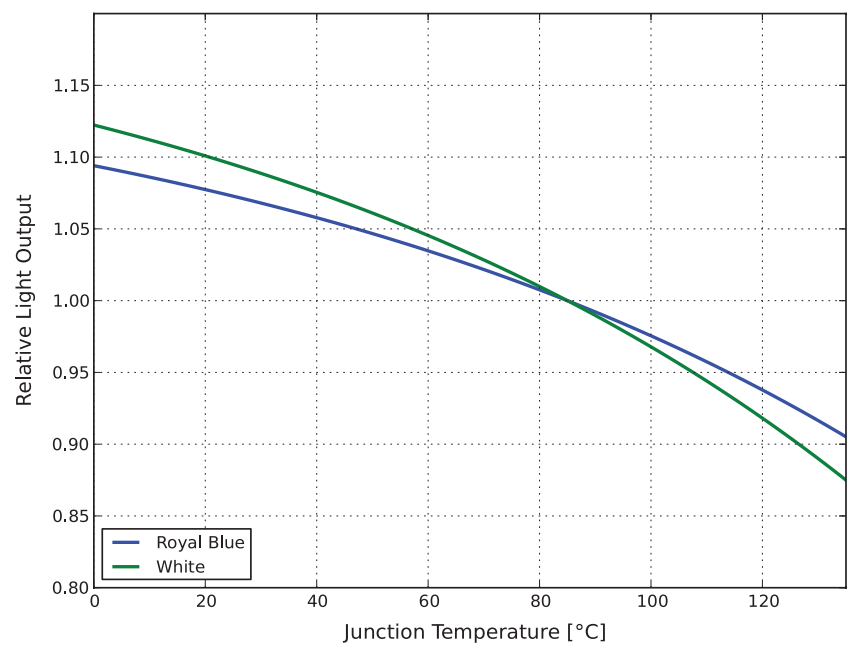


Figure 3: Typical normalized light output vs. junction temperature for LXRx-xxxx at test current,  $T_j=85^{\circ}\text{C}$ .

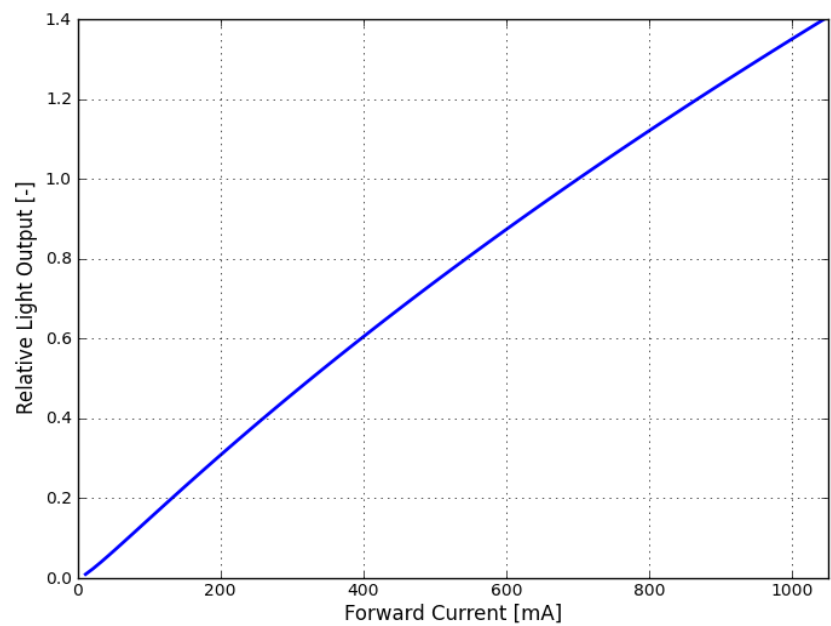


Figure 4a: Typical normalized light output vs. forward current for LXRx-Sxxx at test current,  $T_j=85^{\circ}\text{C}$ .

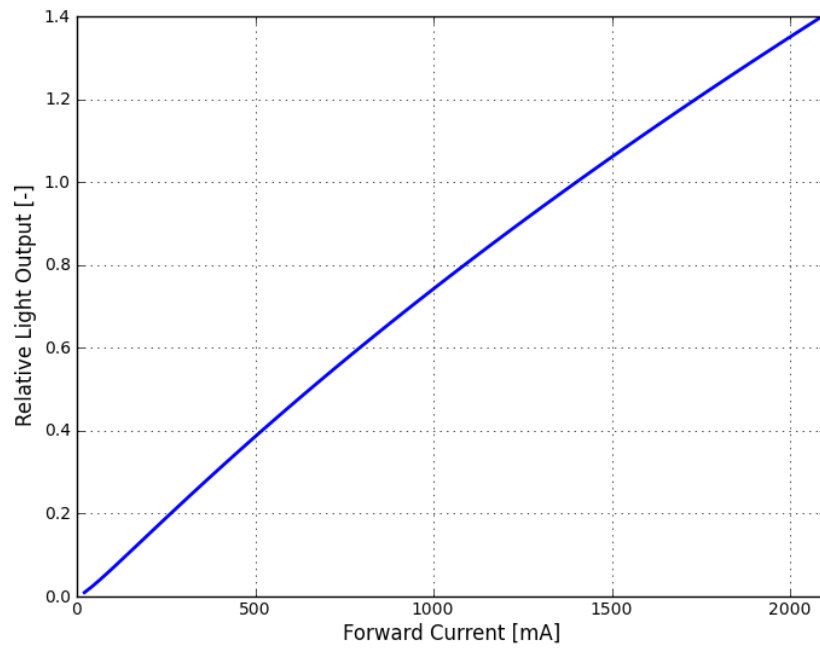


Figure 4b: Typical normalized light output vs. forward current for LXR-Rxxx at test current,  $T_j = 85^\circ\text{C}$ .

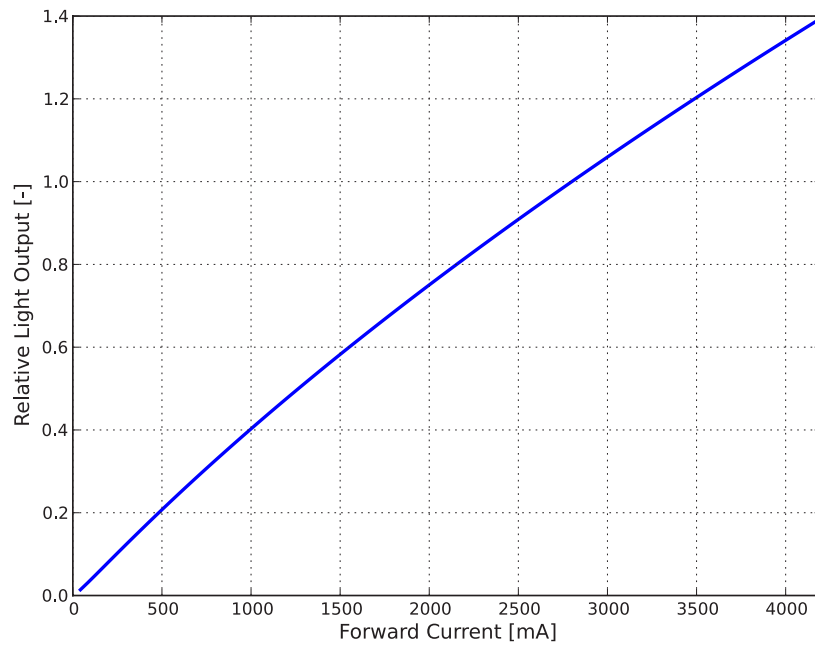


Figure 4c: Typical normalized light output vs. forward current for LXR-Qxxx at test current,  $T_j = 85^\circ\text{C}$ .

# Forward Current Characteristics

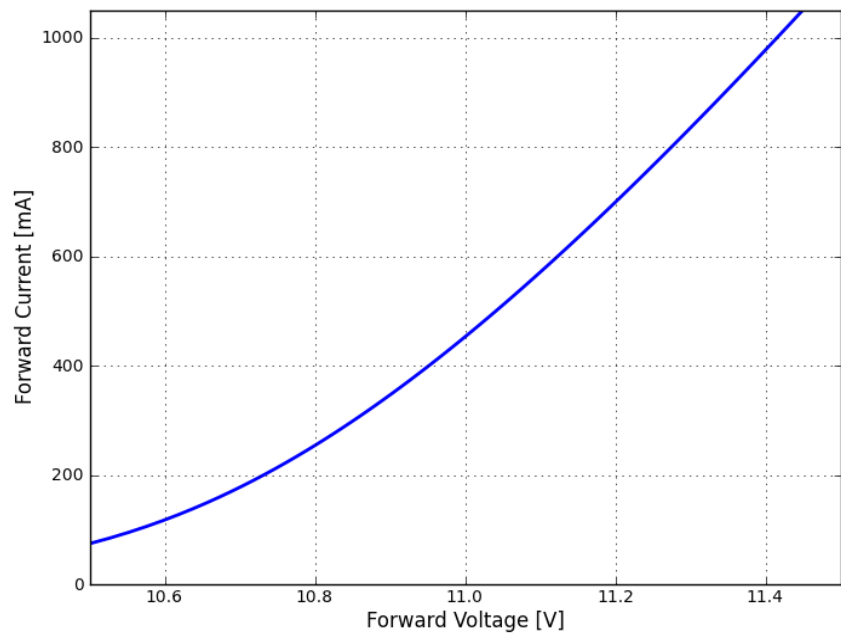


Figure 5a: Typical forward current vs. forward voltage for LXRx-Sxxx at  $T_j=85^{\circ}\text{C}$ .

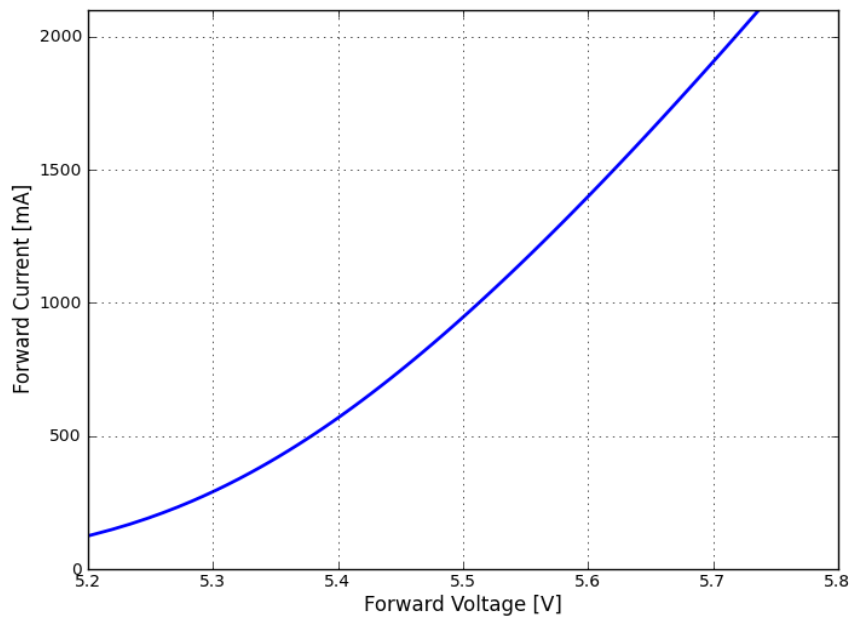


Figure 5b: Typical forward current vs. forward voltage for LXRx-Rxxx at  $T_j=85^{\circ}\text{C}$ .

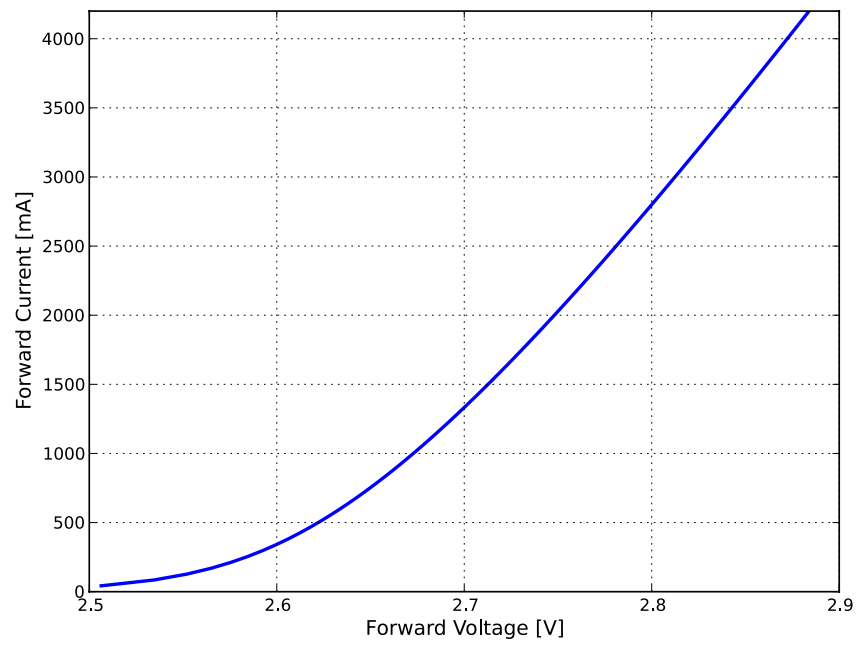


Figure 5c: Typical forward current vs. forward voltage for LXRx-Qxxx at  $T_j = 85^\circ\text{C}$ .

# Radiation Pattern Characteristics

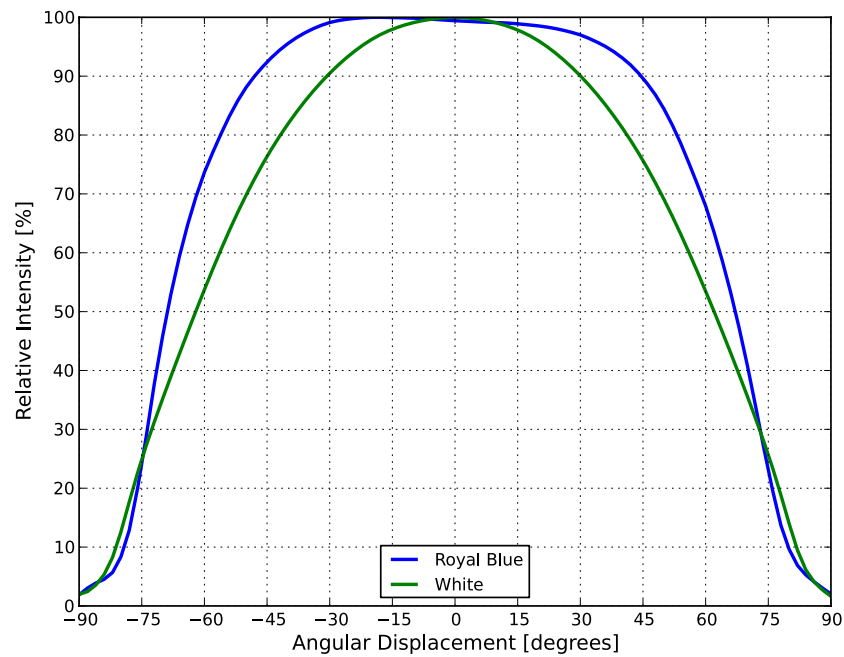


Figure 6: Typical radiation pattern for LXRx-xxxx at test current,  $T_j=85^{\circ}\text{C}$ .

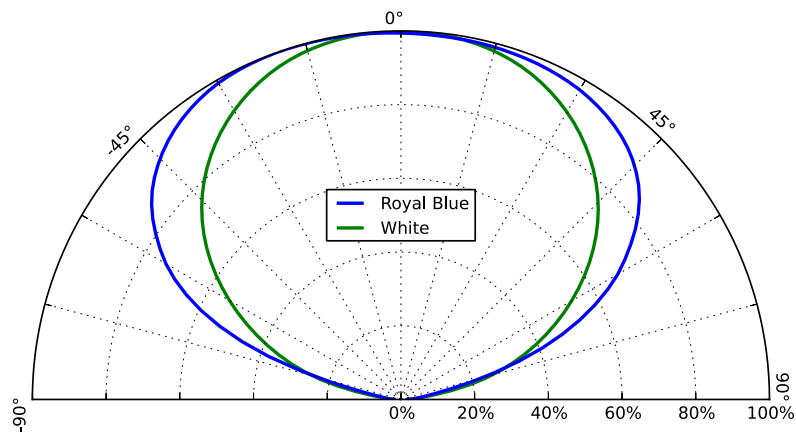


Figure 7: Typical polar radiation pattern for LXRx-xxxx at test current,  $T_j=85^{\circ}\text{C}$ .

# Product Bin and Labeling Definitions

## Decoding Product Bin Labeling

In the manufacturing of semiconductor products, there are variations in performance around the average values given in the technical datasheet. For this reason, Lumileds bins LED components for luminous flux or radiometric power, color point, peak or dominant wavelength and forward voltage.

Reels with LUXEON M White LEDs are labeled using a 4-digit alphanumeric CAT code following the format below:

### A B C D

- A** – designates luminous flux bin (example: M=630 to 680 lumens, T=970 to 1040 lumens)
- B** – designates color bin (example: 1=6500K, 2=5700K, 3=5000K, 5=4000K, 6=3500K, 7=3000K, 8=2700K)
- C** – designates color space (example: 5=5-step MacAdam Ellipse, 3=3-step MacAdam Ellipse)
- D** – designates forward voltage bin (example: F, G, H)

Therefore, a white LUXEON M with a lumen range of 630 to 680, color of 3000K, 5-step MacAdam ellipse and a forward voltage range of 2.63 to 2.75V for 3 volt parts has the following CAT code:

### M 7 5 F

Reels of LUXEON M Royal Blue LEDs are labeled using a 3-digit alphanumeric CAT code following the format below:

### A B C

- A** – designates radiometric power bin (example: B=4200 to 4400mW, D=4600 to 4800mW)
- B** – designates dominant wavelength bin (example: 5=450 to 455nm, 6=455 to 460nm)
- C** – designates forward voltage bin (example: F, G, H)

Therefore, a Royal Blue LUXEON M with a radiometric power range of 4200 to 4400mW, peak of dominant wavelength 450 to 455nm a forward voltage range of 11.50 to 11.70V for 12 volt parts has the following CAT code:

### B 5 H

## Luminous Flux Bins

Table 5 lists the standard photometric luminous flux bins for LUXEON M emitters. Although several bins are outlined, product availability in a particular bin varies by production run and by product performance. Not all bins are available in all CCTs.

**Table 5. Luminous flux bin definitions for LUXEON M White.**

| BIN | LUMINOUS FLUX (lm) |         |
|-----|--------------------|---------|
|     | MINIMUM            | MAXIMUM |
| J   | 510                | 550     |
| K   | 550                | 590     |
| L   | 590                | 630     |
| M   | 630                | 680     |
| N   | 680                | 730     |
| P   | 730                | 780     |
| Q   | 780                | 840     |
| R   | 840                | 900     |
| S   | 900                | 970     |
| T   | 970                | 1040    |
| U   | 1040               | 1120    |
| V   | 1120               | 1200    |
| W   | 1200               | 1290    |

**Notes for Table 5:**

1. Lumileds maintains a tolerance of  $\pm 6.5\%$  on luminous flux measurements.

## Radiometric Power Bins

**Table 6. Radiometric power bin definitions for LUXEON M Royal Blue.**

| BIN | RADIOMETRIC POWER (mW) |         |
|-----|------------------------|---------|
|     | MINIMUM                | MAXIMUM |
| A   | 4000                   | 4200    |
| B   | 4200                   | 4400    |
| C   | 4400                   | 4600    |
| D   | 4600                   | 4800    |
| E   | 4800                   | 5000    |

**Notes for Table 6:**

1. Lumileds maintains a tolerance of  $\pm 6.5\%$  on radiometric power measurements.

## Color Bin Definition

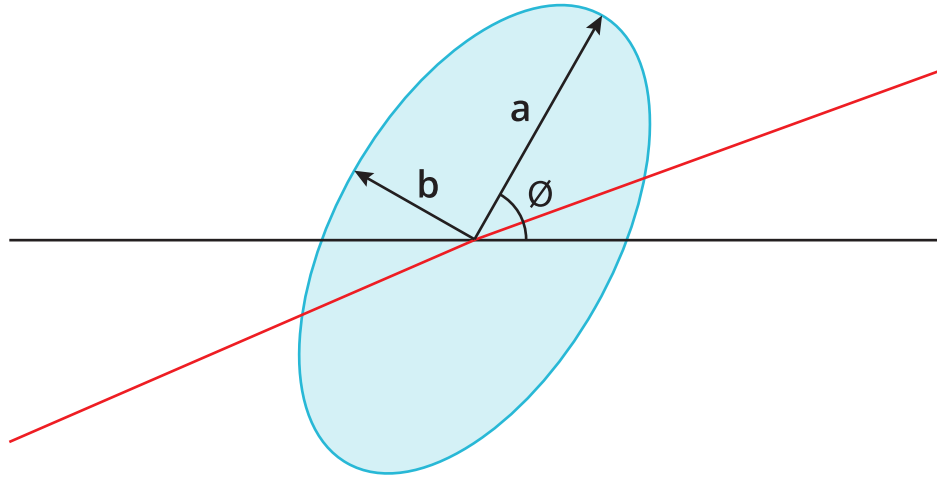


Figure 8: 3- and 5-step MacAdam ellipse illustration for Table 7.

Table 7. 3- and 5-step MacAdam ellipse color bin definitions for LUXEON M.

| NOMINAL CCT | COLOR SPACE                   | CENTER POINT<br>(cx, cy) | MAJOR AXIS,<br>a | MINOR AXIS,<br>b | ELLIPSE ROTATION<br>ANGLE, $\theta$ |
|-------------|-------------------------------|--------------------------|------------------|------------------|-------------------------------------|
| 2700K       | Single 3-step MacAdam ellipse | 0.4578, 0.4101           | 0.00810          | 0.00420          | 53.70                               |
| 3000K       | Single 3-step MacAdam ellipse | 0.4338, 0.4030           | 0.00834          | 0.00408          | 53.22                               |
| 3500K       | Single 3-step MacAdam ellipse | 0.4073, 0.3917           | 0.00927          | 0.00414          | 54.00                               |
| 4000K       | Single 3-step MacAdam ellipse | 0.3818, 0.3797           | 0.00939          | 0.00402          | 53.72                               |
| 5000K       | Single 3-step MacAdam ellipse | 0.3447, 0.3553           | 0.00822          | 0.00354          | 59.62                               |
| 3000K       | Single 5-step MacAdam ellipse | 0.4338, 0.4030           | 0.01390          | 0.00680          | 53.22                               |
| 4000K       | Single 5-step MacAdam ellipse | 0.3818, 0.3797           | 0.01565          | 0.00670          | 53.72                               |
| 5000K       | Single 5-step MacAdam ellipse | 0.3447, 0.3553           | 0.01370          | 0.00590          | 59.62                               |
| 5700K       | Single 5-step MacAdam ellipse | 0.3287, 0.3417           | 0.01243          | 0.00533          | 59.09                               |
| 6500K       | Single 5-step MacAdam ellipse | 0.3123, 0.3282           | 0.01115          | 0.00475          | 58.57                               |

**Notes for Table 7:**

1. Lumileds maintains a tolerance of  $\pm 0.005$  on x and y coordinates in the CIE 1931 color space.

## Dominant Wavelength Bins

Table 8. Dominant wavelength bins for LUXEON M Royal Blue.

| BIN | DOMINANT WAVELENGTH (nm) <sup>[1]</sup> |         |
|-----|-----------------------------------------|---------|
|     | MINIMUM                                 | MAXIMUM |
| 4   | 445                                     | 450     |
| 5   | 450                                     | 455     |
| 6   | 455                                     | 460     |

**Notes for Table 8:**

1. Lumileds maintains a tolerance of  $\pm 0.5\text{nm}$  on dominant wavelength measurements.

## Forward Voltage Bins

Table 9. Forward voltage bin definitions for LUXEON M.

| PART NUMBER                                         | BIN | FORWARD VOLTAGE (V) <sup>(1)</sup> |         |
|-----------------------------------------------------|-----|------------------------------------|---------|
|                                                     |     | MINIMUM                            | MAXIMUM |
| LXR <sub>x</sub> -SW <sub>xx</sub><br>and LXR0-SR00 | F   | 10.50                              | 11.00   |
|                                                     | G   | 11.00                              | 11.50   |
|                                                     | H   | 11.50                              | 11.70   |
| LXR <sub>x</sub> -RW <sub>xx</sub><br>and LXR0-RR00 | F   | 5.25                               | 5.50    |
|                                                     | G   | 5.50                               | 5.75    |
|                                                     | H   | 5.75                               | 6.00    |
| LXR <sub>x</sub> -QW <sub>xx</sub><br>and LXR0-QR00 | F   | 2.63                               | 2.75    |
|                                                     | G   | 2.75                               | 2.88    |
|                                                     | H   | 2.88                               | 3.00    |

Notes for Table 9:

1. Lumileds maintains a tolerance of  $\pm 0.06V$  on forward voltage measurements.

## Mechanical Dimensions

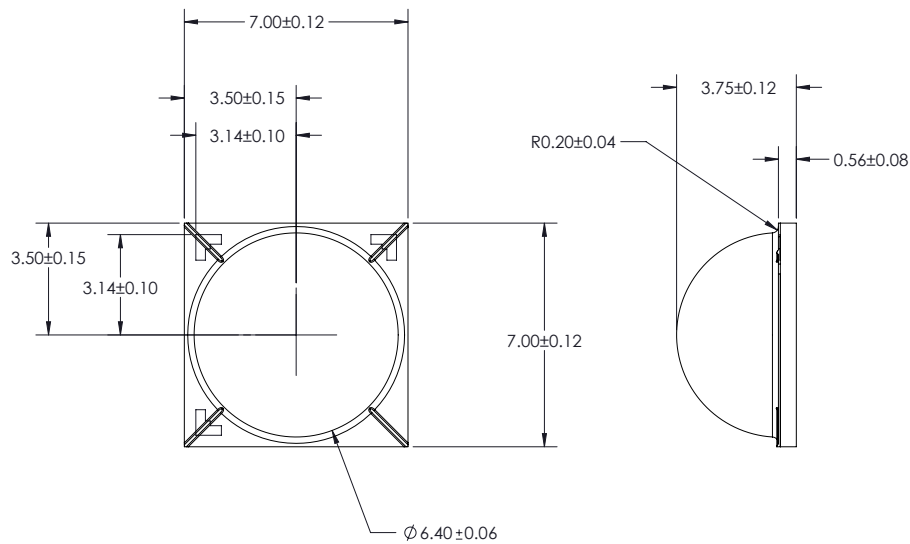


Figure 9: Mechanical dimensions for LUXEON M.

Notes for Figure 9:

1. Drawings are not to scale.
2. All dimensions are in millimeters.

# Reflow Soldering Guidelines

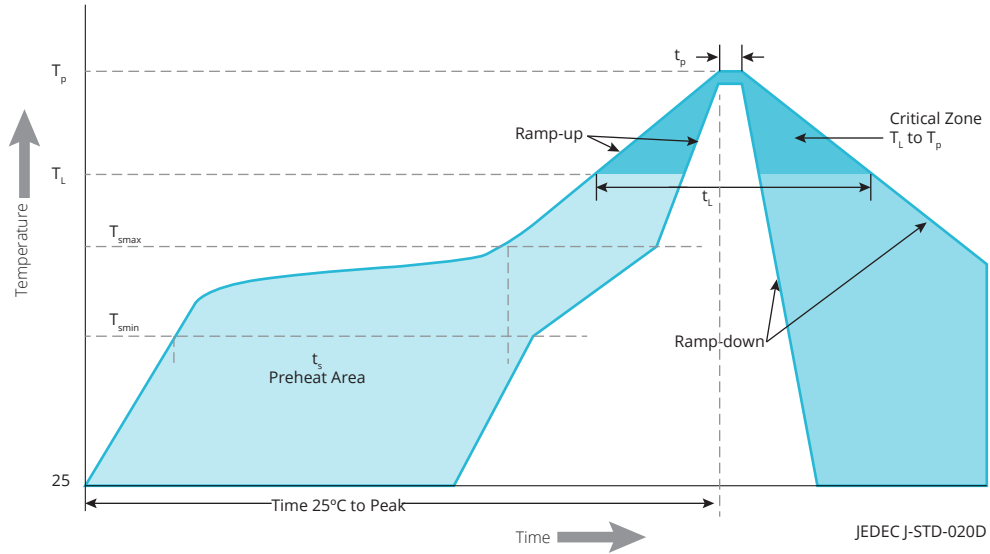


Figure 10: Visualization of the acceptable reflow temperature profile as specified in Table 10.

Table 10. Reflow profile characteristics for LUXEON M.

| PROFILE FEATURE                                   | LEAD-FREE ASSEMBLY   |
|---------------------------------------------------|----------------------|
| Preheat Minimum Temperature ( $T_{smin}$ )        | 150°C                |
| Preheat Maximum Temperature ( $T_{smax}$ )        | 200°C                |
| Preheat Time ( $t_{smin}$ to $t_{smax}$ )         | 60 to 120 seconds    |
| Ramp-Up Rate ( $T_{smax}$ to $T_p$ )              | 3°C / second maximum |
| Liquidus Temperature ( $T_L$ )                    | 217°C                |
| Time Maintained Above Temperature $T_L$ ( $t_L$ ) | 60 to 150 seconds    |
| Peak / Classification Temperature ( $T_p$ )       | 260°C                |
| Time Within 5°C of Actual Temperature ( $t_p$ )   | 20 to 40 seconds     |
| Ramp-Down Rate                                    | 6°C / second maximum |
| Time 25°C to Peak Temperature                     | 8 minutes maximum    |

Notes for Table 10:

1. All temperatures refer to the application Printed Circuit Board (PCB), measured on the surface adjacent to the package body.

## JEDEC Moisture Sensitivity

Table 11. Moisture sensitivity levels for LUXEON M.

| LEVEL | FLOOR LIFE |                                  | SOAK REQUIREMENTS STANDARD |               |
|-------|------------|----------------------------------|----------------------------|---------------|
|       | TIME       | CONDITIONS                       | TIME                       | CONDITIONS    |
| 1     | Unlimited  | $\leq 30^\circ\text{C}$ / 85% RH | 168 Hours +5 / -0          | 85°C / 85% RH |

## Solder Pad Design

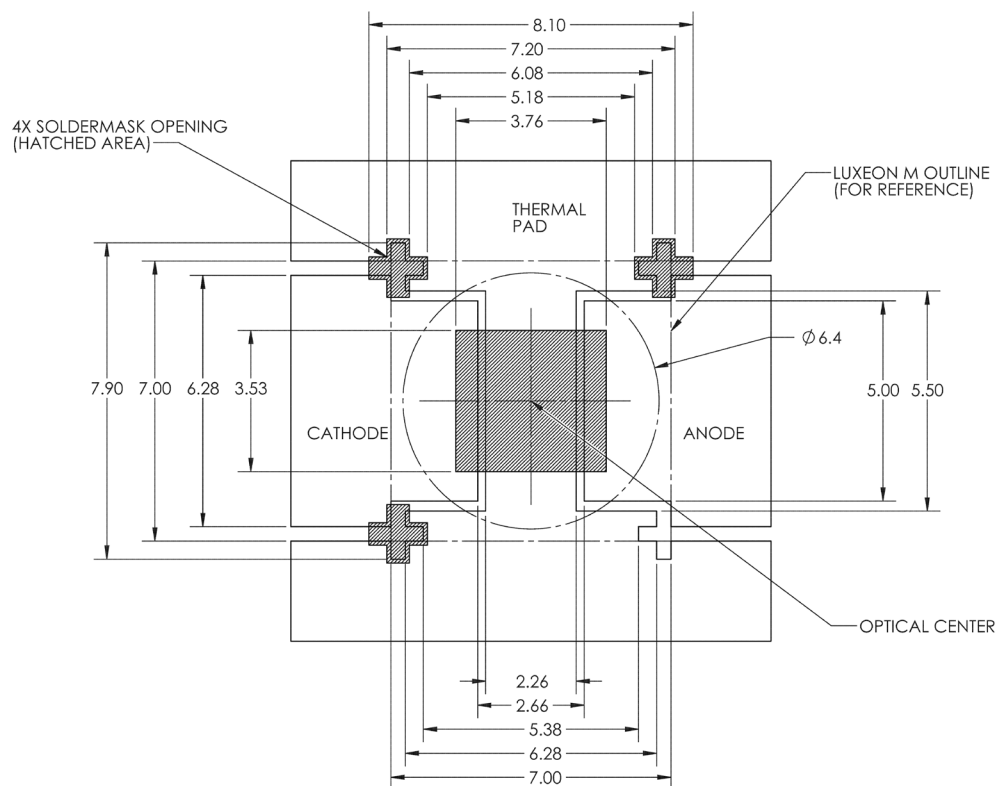


Figure 11: Recommended PCB solder pad layout for LUXEON M.

### Notes for Figure 11:

1. Drawings are not to scale.
2. All dimensions are in millimeters.

## Pocket Tape Dimensions



Notes to Figure 12:

1. Drawings are not to scale.
2. All dimensions are in millimeters.

## Reel Dimensions

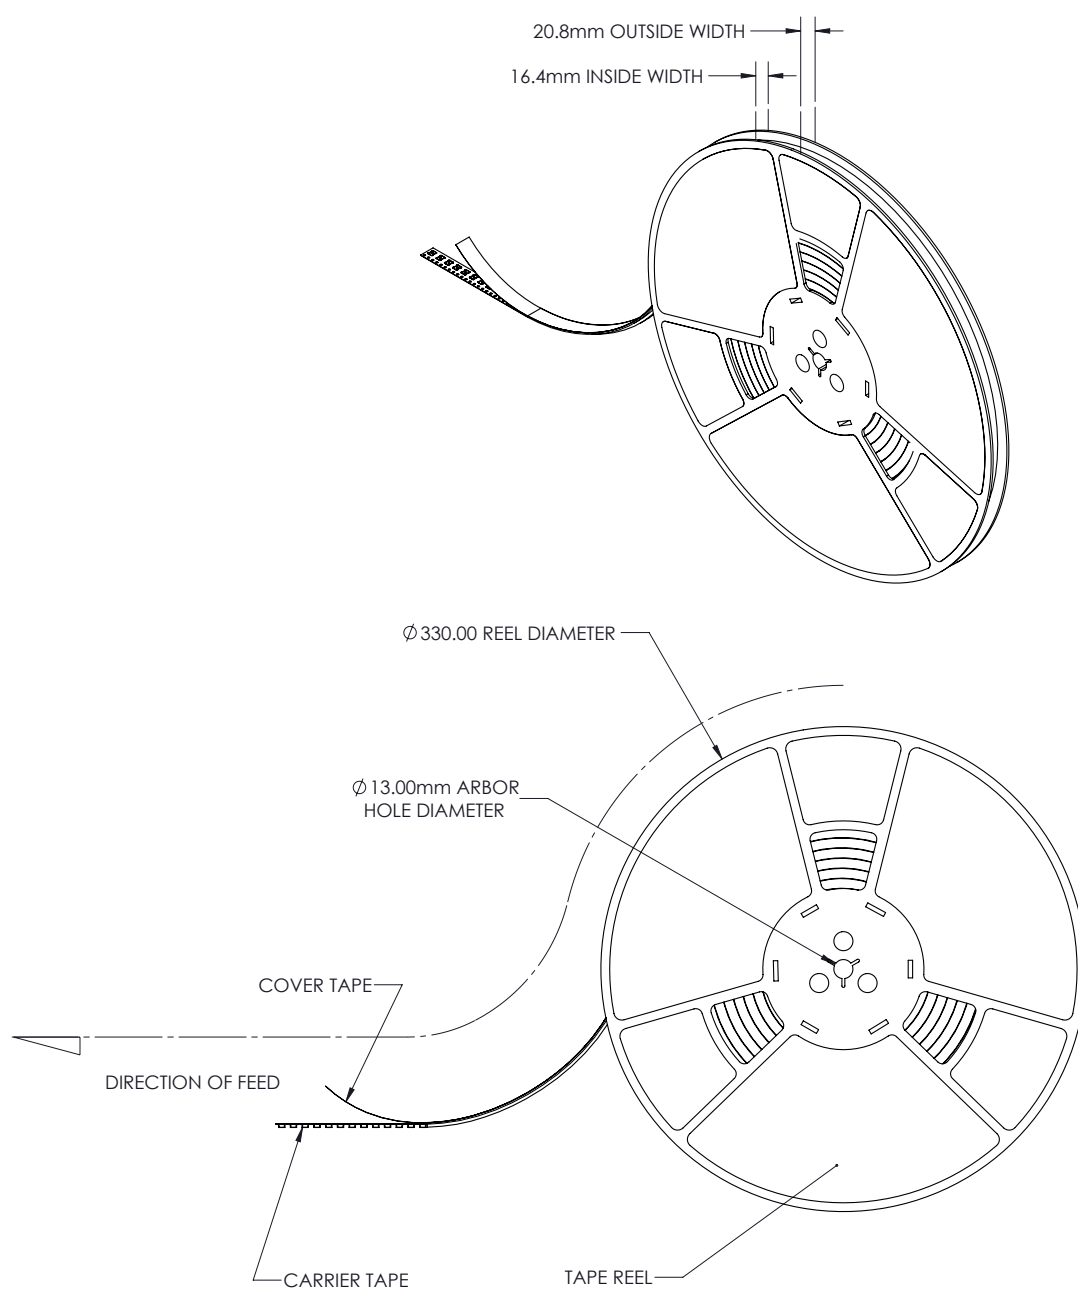


Figure 13: Reel dimensions for LUXEON M.

**Notes for Figure 13:**

1. Drawings are not to scale.
2. All dimensions are in millimeters.

# About Lumileds

Lumileds is the light engine leader, delivering innovation, quality and reliability.

For 100 years, Lumileds commitment to innovation has helped customers pioneer breakthrough products in the automotive, consumer and illumination markets.

Lumileds is shaping the future of light with our LEDs and automotive lamps, and helping our customers illuminate how people see the world around them.

To learn more about our portfolio of light engines, visit [lumileds.com](http://lumileds.com).



©2015 Lumileds Holding B.V. All rights reserved.  
LUXEON is a registered trademark of the Lumileds Holding B.V.  
in the United States and other countries.

[lumileds.com](http://lumileds.com)

Neither Lumileds Holding B.V. nor its affiliates shall be liable for any kind of loss of data or any other damages, direct, indirect or consequential, resulting from the use of the provided information and data. Although Lumileds Holding B.V. and/or its affiliates have attempted to provide the most accurate information and data, the materials and services information and data are provided "as is," and neither Lumileds Holding B.V. nor its affiliates warrants or guarantees the contents and correctness of the provided information and data. Lumileds Holding B.V. and its affiliates reserve the right to make changes without notice. You as user agree to this disclaimer and user agreement with the download or use of the provided materials, information and data.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331