

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0757840149

Status:

Active

Overview:

[ipass](#)

Description:

0.80mm (.031") Pitch, iPass™ I/O SMT Receptacle, Vertical, Internal Application, 36 Circuit, 0.76µm (30µ") Gold (Au), Through Hole 3.18 Shell, Left Key

Documents:

- [Application Specification \(PDF\)](#)
- [RoHS Certificate of Compliance \(PDF\)](#)
- [Drawing \(PDF\)](#)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

I/O Connectors

Series

[75784](#)

Application

Wire-to-Board

Comments

Positive or passive latching cable available

Component Type

Receptacle

Overview

[ipass](#)

Product Name

iPass™, PCI Express\*, SAS, Serial ATA

Type

N/A

Physical

Boot Color

N/A

Circuits (Loaded)

36

Circuits (maximum)

36

Color - Resin

Black

Durability (mating cycles max)

250

Flammability

94V-0

Gender

Female

Keying to Mating Part

Yes

Lock to Mating Part

None

Material - Metal

Copper-Nickel-Zinc, High Performance Alloy (HPA)

Material - Plating Mating

Gold

Material - Plating Termination

Tin

Material - Resin

High Temperature Thermoplastic

Number of Rows

2

Orientation

Vertical

PCB Locator

Yes

PCB Retention

Yes

Packaging Type

Embossed Tape on Reel

Panel Mount

No

Pitch - Mating Interface (in)

0.031 In

Pitch - Mating Interface (mm)

0.80 mm

Pitch - Term. Interface (in)

0.031 In

Pitch - Term. Interface (mm)

0.80 mm

Plating min: Mating (µin)

30.4

Plating min: Mating (µm)

0.76

Plating min: Termination (µin)

101.6

Plating min: Termination (µm)

2.54

Polarized to Mating Part

Yes

Polarized to PCB

Yes

Ports

1

Surface Mount Compatible (SMC)

Yes



image - Reference only

Series

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Halogen-Free

China RoHS



Need more information on product environmental compliance?

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series  
[75784Series](#)

Mates With  
iPass™ Cable Assemblies, [79575](#) , [79576](#) , [74562](#) , [74563](#) , [79536](#)

|                               |                             |
|-------------------------------|-----------------------------|
| Temperature Range - Operating | -40°C to +80°C              |
| Termination Interface: Style  | Surface Mount, Through Hole |
| Waterproof / Dustproof        | No                          |

**Electrical**

|                               |                 |
|-------------------------------|-----------------|
| Current - Maximum per Contact | 0.5A            |
| Grounding to Panel            | None            |
| Shield Type                   | Full Shield     |
| Shielded                      | Yes             |
| Voltage - Maximum             | 30V AC (RMS)/DC |



**Material Info**

**Reference - Drawing Numbers**



|                           |              |
|---------------------------|--------------|
| Application Specification | AS-75783-001 |
| Packaging Specification   | PK-75783-001 |
| Sales Drawing             | SD-75784-001 |

This document was generated on 05/28/2010


**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

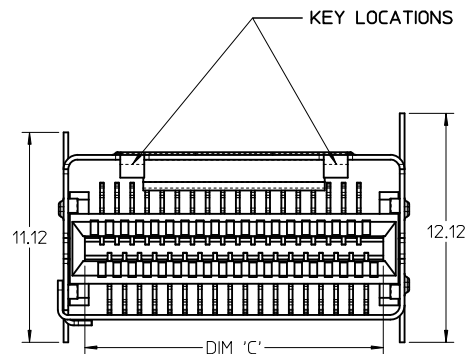

- NOTES:
- MATERIAL:  
CONNECTOR:  
HOUSING - HIGH TEMPERATURE THERMOPLASTIC GLASS FILLED, UL 94V-0, BLACK  
TERMINALS - COPPER ALLOY  
SHELL  
NICKEL SILVER, C770, THICKNESS: 0.250/0.254
  - FINISH:  
CONNECTOR  
OPTION 1  
CONTACT AREA - 0.38 $\mu$ m MIN GOLD OVER 2.54  $\mu$ m NICKEL  
SOLDER FOOT AREA - 2.54-5.09 $\mu$ m TIN OVER 1.27  $\mu$ m NICKEL  
OPTION 2  
CONTACT AREA - 0.76 $\mu$ m MIN GOLD OVER 2.54  $\mu$ m NICKEL  
SOLDER FOOT AREA - 2.54-5.09 $\mu$ m TIN OVER 1.27  $\mu$ m NICKEL
  - TERMINAL SOLDER FEET TO BE COPLANAR WITHIN 0.10 MEASURED FROM DATUM E
  - DATE CODE: 4 DIGIT (3 DIGIT DAY, 1 DIGIT YEAR) ON CONNECTOR ONLY
  - CIRCUIT IDENTIFIER: SEE APPROPRIATE INDUSTRY SPECIFICATION FOR LOCATION OF PIN 1
  - TO BE USED WITH THE FOLLOWING CABLE SERIES:  
79575/74563/79576/74573/79536/74562/74569/74586
  - PACKAGED PER PACKAGING SPECIFICATION: PK-75783-001
  - CONFORMS TO PRODUCT SPECIFICATION: PS-75783-001
  - PROCESS PER APPLICATION SPECIFICATION: AS-75783-001
  - THIS PART CONFORMS TO CLASS C REQUIREMENTS OF COSMETIC SPEC PS-45499-002

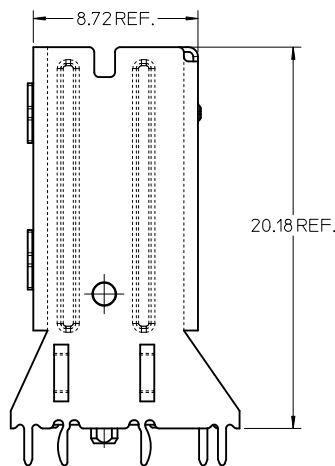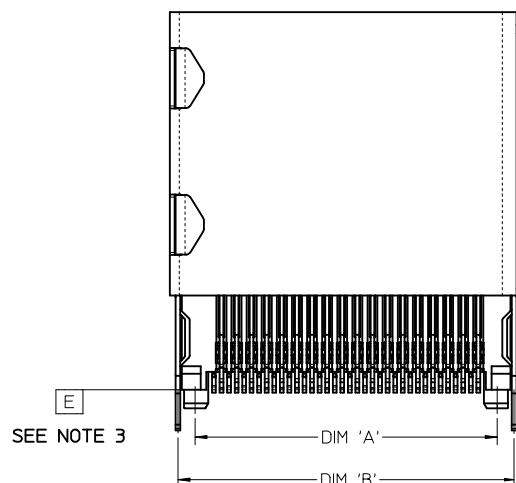

36 CIRCUIT  
RETENTION FIT  
SHELL OPTION SHOWN

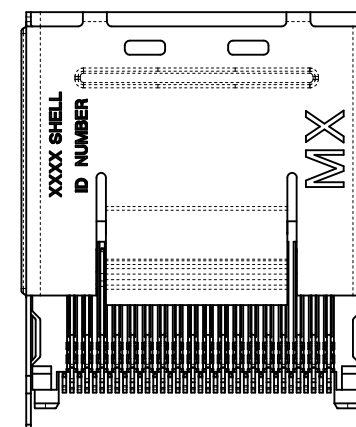

iPass™ IS A TRADEMARK OF MOLEX

| CIRCUIT SIZE | DIM 'A' | DIM 'B' | DIM 'C' |
|--------------|---------|---------|---------|
| 26           | 12.00   | 13.80   | 11.80   |
| 36           | 16.00   | 17.80   | 15.80   |
| 50           | 21.60   | 23.40   | 21.40   |
| 68           | 28.80   | 30.60   | 28.60   |

|                                                                                            |            |             |            |
|--------------------------------------------------------------------------------------------|------------|-------------|------------|
| GEOMETRY UPDATE<br>EC NO: UCP2010-1913<br>DRAWN: KLANG<br>CHKD: JSWENSON<br>APPR: MBANAKIS | 2010/02/03 | 2010/03/24  | 2010/03/25 |
|                                                                                            | REV        | DESCRIPTION | DATE       |
| D2                                                                                         |            |             |            |






QUALITY SYMBOLS  
=0  
=0

| GENERAL TOLERANCES (UNLESS SPECIFIED)                |       |
|------------------------------------------------------|-------|
| mm                                                   | INCH  |
| 4 PLACES ± ---                                       | ± --- |
| 3 PLACES ± ---                                       | ± --- |
| 2 PLACES ± 0.13                                      | ± --- |
| 1 PLACE ± 0.25                                       | ± --- |
| ANGULAR ± 1/2°                                       |       |
| DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS |       |

| DIMENSION STYLE MM ONLY |          |
|-------------------------|----------|
| DRAWN BY                | DATE     |
| KLANG                   | 02/09/05 |
| CHECKED BY              | DATE     |
| JSWENSON                | 02/09/05 |
| APPROVED BY             | DATE     |
| MBANAKIS                | 02/02/05 |
| MATERIAL NO. SEE CHART  |          |
| SIZE                    | C        |

| SCALE 5:1                                                                                                                     | DESIGN UNITS METRIC | THIRD ANGLE PROJECTION |
|-------------------------------------------------------------------------------------------------------------------------------|---------------------|------------------------|
| TITLE I-PASS VERT CONNECTOR INTERNAL ASSY W/SHELL 0.8MM PITCH I/O                                                             |                     |                        |
| MOLEX MOLEX INCORPORATED                                                                                                      |                     |                        |
| DOCUMENT NO. SD-75784-001                                                                                                     |                     | SHEET NO. 1 OF 12      |
| THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |                     |                        |

ASSEMBLY WITH PRE-POSITIONING DEVICE

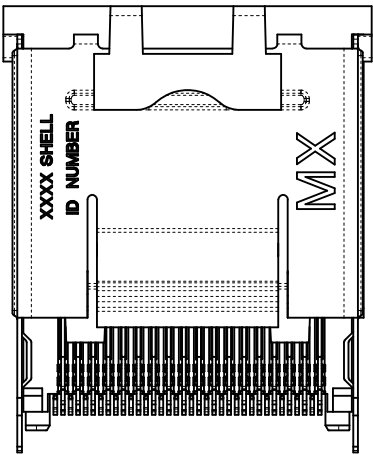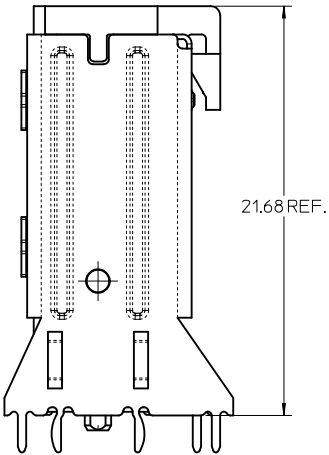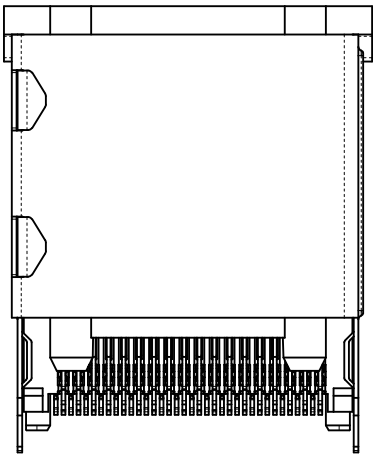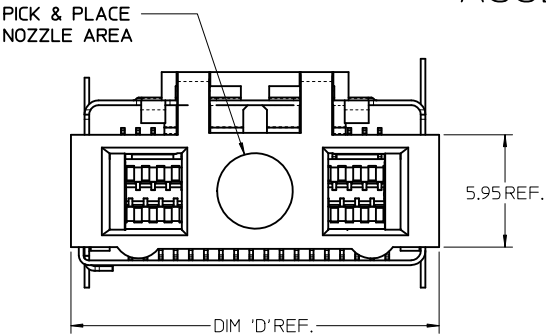

36 CIRCUIT RETENTION FIT SHOWN

NOTES:



1. PICK AND PLACE LOCATION DEFINED ON APPLICATION SPECIFICATION AS-75783-001
2. PACKAGING CONSISTS OF CONNECTOR AND SHELL WITH A PRE-POSITIONING PICK AND PLACE DEVICE THAT ARE PACKAGED IN 'TAPE AND REEL' FOR ROBOTIC PICK AND PLACE.

iPass™ IS A TRADEMARK OF MOLEX



| CIRCUIT SIZE | DIM 'D' |
|--------------|---------|
| 26           | 15.50   |
| 36           | 19.50   |
| 50           | 25.10   |
| 68           | 32.30   |

|                                                                                                       |     |             |                               |                                       |        |                                                            |                           |                  |                                                                                                                                                                                        |                                                                                                              |                                                                                                                               |  |
|-------------------------------------------------------------------------------------------------------|-----|-------------|-------------------------------|---------------------------------------|--------|------------------------------------------------------------|---------------------------|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|--|
| SEE SHEET 1<br>EC NO: UCP2010-1913<br>DRAWN BY: DRWNLKANG<br>CHKD: JSWENSON<br>APPR: MBANAK I S<br>D2 | REV | DESCRIPTION | QUALITY SYMBOLS<br>▽=0<br>▽=0 | GENERAL TOLERANCES (UNLESS SPECIFIED) |        | DIMENSION STYLE<br>MM ONLY                                 |                           | SCALE<br>5:1     | DESIGN UNITS<br>METRIC                                                                                                                                                                 |  THIRD ANGLE PROJECTION |                                                                                                                               |  |
|                                                                                                       |     |             |                               |                                       | mm     | INCH                                                       | DRAWN BY<br>KLANG         | DATE<br>02/09/05 | TITLE<br>I-PASS VERT CONNECTOR<br>INTERNAL ASSY W/SHELL<br>0.8MM PITCH I/O<br> MOLEX INCORPORATED |                                                                                                              |                                                                                                                               |  |
|                                                                                                       |     |             |                               | 4 PLACES                              | ± ---  | ± ---                                                      | CHECKED BY<br>JSWENSON    | DATE<br>02/09/05 |                                                                                                                                                                                        |                                                                                                              |                                                                                                                               |  |
|                                                                                                       |     |             |                               | 3 PLACES                              | ± ---  | ± ---                                                      | APPROVED BY<br>MBANAK I S | DATE<br>02/02/05 |                                                                                                                                                                                        |                                                                                                              |                                                                                                                               |  |
|                                                                                                       |     |             |                               | 2 PLACES                              | ± 0.13 | ± ---                                                      | MATERIAL NO.              |                  |                                                                                                                                                                                        |                                                                                                              | DOCUMENT NO.<br>SD-75784-001                                                                                                  |  |
|                                                                                                       |     |             |                               | 1 PLACE                               | ± 0.25 | ± ---                                                      | SHEET NO.<br>2 OF 12      |                  |                                                                                                                                                                                        |                                                                                                              |                                                                                                                               |  |
|                                                                                                       |     |             |                               | ANGULAR ±1/2°                         |        | DRAFT WHERE APPLICABLE<br>MUST REMAIN<br>WITHIN DIMENSIONS |                           | SIZE<br>C        |                                                                                                                                                                                        |                                                                                                              | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |  |
|                                                                                                       |     |             |                               |                                       |        |                                                            |                           | SEE CHART        |                                                                                                                                                                                        |                                                                                                              |                                                                                                                               |  |
|                                                                                                       |     |             |                               |                                       |        |                                                            |                           |                  |                                                                                                                                                                                        |                                                                                                              |                                                                                                                               |  |
|                                                                                                       |     |             |                               |                                       |        |                                                            |                           |                  |                                                                                                                                                                                        |                                                                                                              |                                                                                                                               |  |



# SHELL PCB INTERFACE

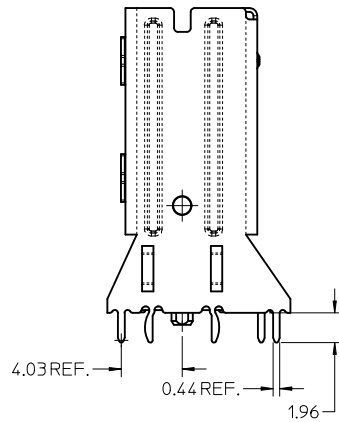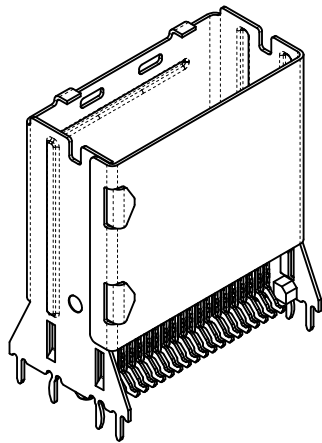

RETENTION-FIT  
SHELL OPTION

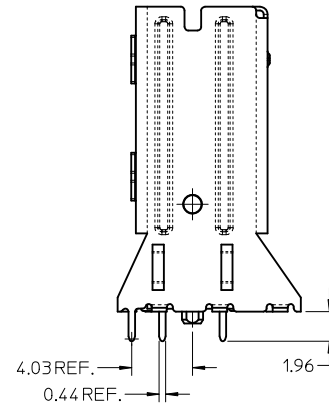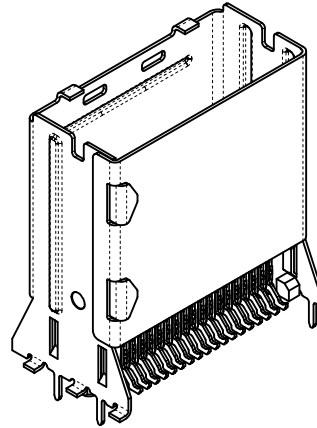

SMT SHELL OPTION

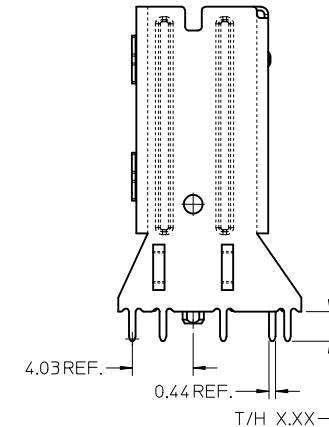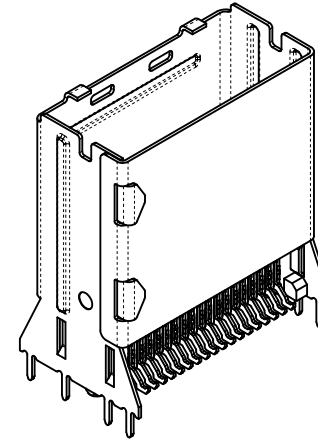

THRU-HOLE SHELL OPTION  
SEE TABLE FOR LENGTH  
(X.XX DENOTES LENGTH)

RECOMMENDED PCB THICKNESS  
FOR SPECIFIED TAIL LENGTH

| TAIL LENGTH | PCB THICKNESS |
|-------------|---------------|
| 1.96        | 1.57 (.062)   |
| 2.79        | 2.36 (.093)   |
| 3.18        | 2.79 (.110)   |
| 3.56        | 3.18 (.125)   |

NOTE:

RETENTION FIT DENOTES TAILS THAT OFFER RETENTION  
TO PCB DURING REFLOW PROCESS  
SMT DENOTES SURFACE MOUNT TERMINATION  
T/H X.XX DENOTES THRU-HOLE TAIL OF LENGTH X.XX

SEE SHEET 1  
EC NO: UCP2010-1913  
DRAWN BY: DRWNLKANG  
CHKD: JSWENSON  
APPR: MBANAKIS  
REV: D2

QUALITY  
SYMBOLS  
▽=0  
▽=0

GENERAL TOLERANCES  
(UNLESS SPECIFIED)

|          | mm     | INCH    |
|----------|--------|---------|
| 4 PLACES | ± .005 | ± .0004 |
| 3 PLACES | ± .008 | ± .0006 |
| 2 PLACES | ± .013 | ± .0009 |
| 1 PLACE  | ± .025 | ± .0010 |

ANGULAR ±1/2°

DRAFT WHERE APPLICABLE  
MUST REMAIN  
WITHIN DIMENSIONS

DIMENSION STYLE  
MM ONLY

|             |          |
|-------------|----------|
| DRAWN BY    | DATE     |
| KLANG       | 02/09/05 |
| CHECKED BY  | DATE     |
| JSWENSON    | 02/09/05 |
| APPROVED BY | DATE     |
| MBANAKIS    | 02/02/05 |

MATERIAL NO.





SEE CHART

SIZE C

|                                                                            |                        |                           |
|----------------------------------------------------------------------------|------------------------|---------------------------|
| SCALE<br>4:1                                                               | DESIGN UNITS<br>METRIC | THIRD ANGLE<br>PROJECTION |
| TITLE<br>I-PASS VERT CONNECTOR<br>INTERNAL ASSY W/SHELL<br>0.8MM PITCH I/O |                        |                           |
| MOLEX INCORPORATED                                                         |                        |                           |
| DOCUMENT NO.<br>SD-75784-001                                               | SHEET NO.<br>3 OF 12   |                           |

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX  
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

# KEYING OPTIONS

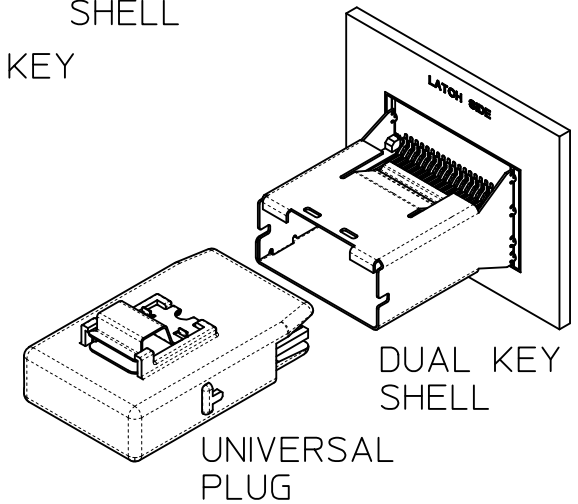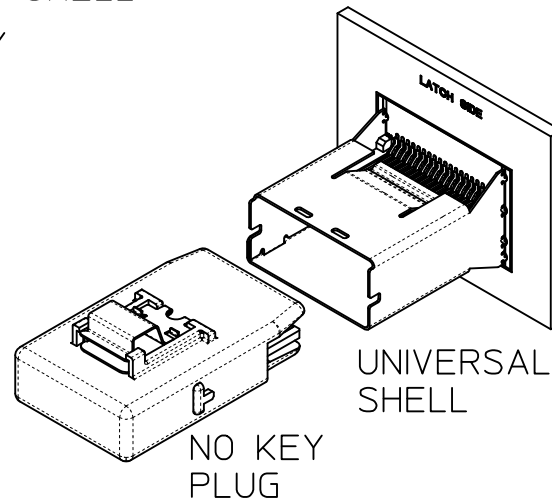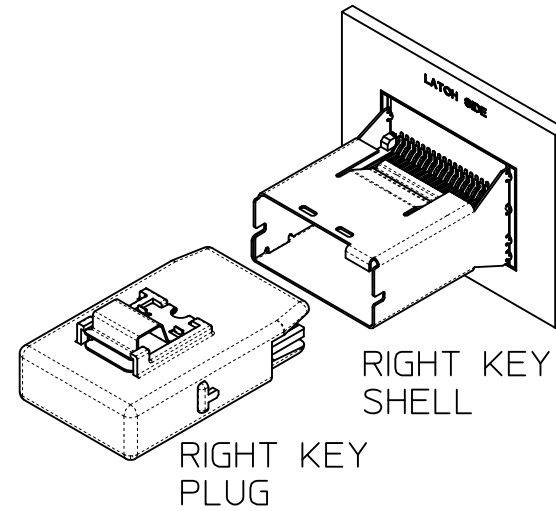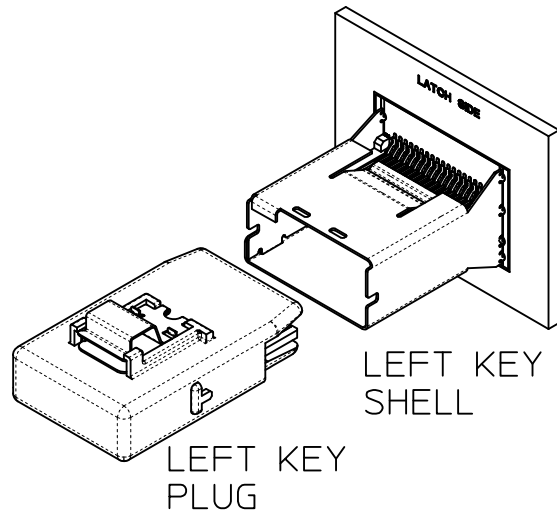

|                | UNIVERSAL SHELL | LEFT KEY SHELL | RIGHT KEY SHELL | DUAL KEY SHELL |
|----------------|-----------------|----------------|-----------------|----------------|
| NO KEY PLUG    | YES             | NO             | NO              | NO             |
| LEFT KEY PLUG  | YES             | YES            | NO              | NO             |
| RIGHT KEY PLUG | YES             | NO             | YES             | NO             |
| UNIVERSAL PLUG | YES             | YES            | YES             | YES            |

|                                                                                                                          |             |                               |                                       |        |                                                            |                         |              |                        |                                                                                                                               |         |  |
|--------------------------------------------------------------------------------------------------------------------------|-------------|-------------------------------|---------------------------------------|--------|------------------------------------------------------------|-------------------------|--------------|------------------------|-------------------------------------------------------------------------------------------------------------------------------|---------|--|
| SEE SHEET 1<br>EC NO: UCP2010-1913<br>DRW:KLANG 2010/02/03<br>CHKD:JSWENSON 2010/03/24<br>APPR:MBANAKIS 2010/03/25<br>D2 | DESCRIPTION | QUALITY SYMBOLS<br>▽=0<br>▽=0 | GENERAL TOLERANCES (UNLESS SPECIFIED) |        | DIMENSION STYLE<br>MM ONLY                                 |                         | SCALE<br>2:1 | DESIGN UNITS<br>METRIC | THIRD ANGLE PROJECTION                                                                                                        |         |  |
|                                                                                                                          |             |                               |                                       | mm     | INCH                                                       | DRAWN BY<br>KLANG       |              | DATE<br>02/09/05       | TITLE<br>I-PASS VERT CONNECTOR<br>INTERNAL ASSY W/SHELL<br>0.8MM PITCH I/O                                                    |         |  |
|                                                                                                                          |             |                               | 4 PLACES                              | ± .005 | ± .0005                                                    | CHECKED BY<br>JSWENSON  |              | DATE<br>02/09/05       |                                                                                                                               |         |  |
|                                                                                                                          |             |                               | 3 PLACES                              | ± .005 | ± .0005                                                    | APPROVED BY<br>MBANAKIS |              | DATE<br>02/02/05       | MOLEX MOLEX INCORPORATED                                                                                                      |         |  |
|                                                                                                                          |             |                               | 2 PLACES                              | ± 0.13 | ± .005                                                     | MATERIAL NO.            |              | DOCUMENT NO.           | SHEET NO.                                                                                                                     |         |  |
|                                                                                                                          |             |                               | 1 PLACE                               | ± 0.25 | ± .001                                                     | SEE CHART               |              | SD-75784-001           |                                                                                                                               | 4 OF 12 |  |
|                                                                                                                          |             |                               | ANGULAR ±1/2°                         |        | DRAFT WHERE APPLICABLE<br>MUST REMAIN<br>WITHIN DIMENSIONS |                         | SIZE<br>C    |                        | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |         |  |
|                                                                                                                          |             |                               |                                       |        |                                                            |                         |              |                        |                                                                                                                               |         |  |
|                                                                                                                          |             |                               |                                       |        |                                                            |                         |              |                        |                                                                                                                               |         |  |
|                                                                                                                          |             |                               |                                       |        |                                                            |                         |              |                        |                                                                                                                               |         |  |

iPass™ IS A TRADEMARK OF MOLEX

I-PASS VERT CONNECTOR  
INTERNAL ASSY W/SHELL  
0.8MM PITCH I/O



MOLEX INCORPORATED

# 26 CIRCUIT ITEM NUMBERS

| CIRCUIT SIZE | ITEM NUMBER | PLATING OPTION | SHELL PCB OPTION | SHELL KEY OPTION |
|--------------|-------------|----------------|------------------|------------------|
| 26           | 75784-0007  | OPTION 1       | RETENTION        | LEFT             |
| 26           | 75784-0008  | OPTION 1       | RETENTION        | RIGHT            |
| 26           | 75784-0009  | OPTION 1       | RETENTION        | DUAL             |
| 26           | 75784-0010  | OPTION 1       | SMT              | LEFT             |
| 26           | 75784-0011  | OPTION 1       | SMT              | RIGHT            |
| 26           | 75784-0012  | OPTION 1       | SMT              | DUAL             |
| 26           | 75784-0019  | OPTION 2       | RETENTION        | LEFT             |
| 26           | 75784-0020  | OPTION 2       | RETENTION        | RIGHT            |
| 26           | 75784-0021  | OPTION 2       | RETENTION        | DUAL             |
| 26           | 75784-0022  | OPTION 2       | SMT              | LEFT             |
| 26           | 75784-0023  | OPTION 2       | SMT              | RIGHT            |
| 26           | 75784-0024  | OPTION 2       | SMT              | DUAL             |
| 26           | 75784-0025  | OPTION 1       | RETENTION        | UNIVERSAL        |
| 26           | 75784-0026  | OPTION 1       | SMT              | UNIVERSAL        |
| 26           | 75784-0027  | OPTION 2       | RETENTION        | UNIVERSAL        |
| 26           | 75784-0028  | OPTION 2       | SMT              | UNIVERSAL        |
| 26           | 75784-0029  | OPTION 1       | T/H 1.96         | LEFT             |
| 26           | 75784-0030  | OPTION 1       | T/H 1.96         | RIGHT            |
| 26           | 75784-0031  | OPTION 1       | T/H 1.96         | DUAL             |
| 26           | 75784-0032  | OPTION 1       | T/H 1.96         | UNIVERSAL        |
| 26           | 75784-0033  | OPTION 2       | T/H 1.96         | LEFT             |
| 26           | 75784-0034  | OPTION 2       | T/H 1.96         | RIGHT            |
| 26           | 75784-0035  | OPTION 2       | T/H 1.96         | DUAL             |
| 26           | 75784-0036  | OPTION 2       | T/H 1.96         | UNIVERSAL        |

| CIRCUIT SIZE | ITEM NUMBER | PLATING OPTION | SHELL PCB OPTION | SHELL KEY OPTION |
|--------------|-------------|----------------|------------------|------------------|
| 26           | 75784-0037  | OPTION 1       | T/H 2.79         | LEFT             |
| 26           | 75784-0038  | OPTION 1       | T/H 2.79         | RIGHT            |
| 26           | 75784-0039  | OPTION 1       | T/H 2.79         | DUAL             |
| 26           | 75784-0040  | OPTION 1       | T/H 2.79         | UNIVERSAL        |
| 26           | 75784-0041  | OPTION 2       | T/H 2.79         | LEFT             |
| 26           | 75784-0042  | OPTION 2       | T/H 2.79         | RIGHT            |
| 26           | 75784-0043  | OPTION 2       | T/H 2.79         | DUAL             |
| 26           | 75784-0044  | OPTION 2       | T/H 2.79         | UNIVERSAL        |
| 26           | 75784-0045  | OPTION 1       | T/H 3.18         | LEFT             |
| 26           | 75784-0046  | OPTION 1       | T/H 3.18         | RIGHT            |
| 26           | 75784-0047  | OPTION 1       | T/H 3.18         | DUAL             |
| 26           | 75784-0048  | OPTION 1       | T/H 3.18         | UNIVERSAL        |
| 26           | 75784-0049  | OPTION 2       | T/H 3.18         | LEFT             |
| 26           | 75784-0050  | OPTION 2       | T/H 3.18         | RIGHT            |
| 26           | 75784-0051  | OPTION 2       | T/H 3.18         | DUAL             |
| 26           | 75784-0052  | OPTION 2       | T/H 3.18         | UNIVERSAL        |

iPass™ IS A TRADEMARK OF MOLEX

| <b>SEE SHEET 1</b><br>EC NO: UCP2010-1913<br>2010/02/03<br>DRWN:KLANG<br>2010/03/24<br>CHKD:JSWENSON<br>2010/03/25<br>APPR:MBANAKIS | DESCRIPTION<br>REV | QUALITY SYMBOLS<br>▽=0<br>▽=0                                                                                                                                                                                                                                                                                           | GENERAL TOLERANCES (UNLESS SPECIFIED) |                                                                                                                                  | DIMENSION STYLE<br><b>MM ONLY</b> |                                     | SCALE<br><b>2:1</b> | DESIGN UNITS<br><b>METRIC</b> | THIRD ANGLE PROJECTION |          |       |       |          |        |       |         |        |       |                   |  |                  |                                                                                     |  |  |
|-------------------------------------------------------------------------------------------------------------------------------------|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|-------------------------------------|---------------------|-------------------------------|------------------------|----------|-------|-------|----------|--------|-------|---------|--------|-------|-------------------|--|------------------|-------------------------------------------------------------------------------------|--|--|
|                                                                                                                                     |                    | <table border="1"> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> <tr> <td>4 PLACES</td> <td>± ---</td> <td>± ---</td> </tr> <tr> <td>3 PLACES</td> <td>± ---</td> <td>± ---</td> </tr> <tr> <td>2 PLACES</td> <td>± 0.13</td> <td>± ---</td> </tr> <tr> <td>1 PLACE</td> <td>± 0.25</td> <td>± ---</td> </tr> </table> |                                       |                                                                                                                                  | mm                                | INCH                                | 4 PLACES            | ± ---                         | ± ---                  | 3 PLACES | ± --- | ± --- | 2 PLACES | ± 0.13 | ± --- | 1 PLACE | ± 0.25 | ± --- | DRAWN BY<br>KLANG |  | DATE<br>02/09/05 | TITLE<br><b>I-PASS VERT CONNECTOR<br/>INTERNAL ASSY W/SHELL<br/>0.8MM PITCH I/O</b> |  |  |
|                                                                                                                                     |                    |                                                                                                                                                                                                                                                                                                                         | mm                                    | INCH                                                                                                                             |                                   |                                     |                     |                               |                        |          |       |       |          |        |       |         |        |       |                   |  |                  |                                                                                     |  |  |
|                                                                                                                                     |                    | 4 PLACES                                                                                                                                                                                                                                                                                                                | ± ---                                 | ± ---                                                                                                                            |                                   |                                     |                     |                               |                        |          |       |       |          |        |       |         |        |       |                   |  |                  |                                                                                     |  |  |
| 3 PLACES                                                                                                                            | ± ---              | ± ---                                                                                                                                                                                                                                                                                                                   |                                       |                                                                                                                                  |                                   |                                     |                     |                               |                        |          |       |       |          |        |       |         |        |       |                   |  |                  |                                                                                     |  |  |
| 2 PLACES                                                                                                                            | ± 0.13             | ± ---                                                                                                                                                                                                                                                                                                                   |                                       |                                                                                                                                  |                                   |                                     |                     |                               |                        |          |       |       |          |        |       |         |        |       |                   |  |                  |                                                                                     |  |  |
| 1 PLACE                                                                                                                             | ± 0.25             | ± ---                                                                                                                                                                                                                                                                                                                   |                                       |                                                                                                                                  |                                   |                                     |                     |                               |                        |          |       |       |          |        |       |         |        |       |                   |  |                  |                                                                                     |  |  |
| CHECKED BY<br>JSWENSON                                                                                                              |                    | DATE<br>02/09/05                                                                                                                                                                                                                                                                                                        |                                       |                                                                                                                                  |                                   |                                     |                     |                               |                        |          |       |       |          |        |       |         |        |       |                   |  |                  |                                                                                     |  |  |
| APPROVED BY<br>MBANAKIS                                                                                                             |                    | DATE<br>02/02/05                                                                                                                                                                                                                                                                                                        | MATERIAL NO.                          |                                                                                                                                  | <b>SEE CHART</b>                  |                                     | MOLEX INCORPORATED  |                               |                        |          |       |       |          |        |       |         |        |       |                   |  |                  |                                                                                     |  |  |
| DRAFT WHERE APPLICABLE<br>MUST REMAIN<br>WITHIN DIMENSIONS                                                                          |                    | SIZE<br><b>C</b>                                                                                                                                                                                                                                                                                                        |                                       | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX<br>INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |                                   | DOCUMENT NO.<br><b>SD-75784-001</b> |                     | SHEET NO.<br><b>5 OF 12</b>   |                        |          |       |       |          |        |       |         |        |       |                   |  |                  |                                                                                     |  |  |

# 36 CIRCUIT ITEM NUMBERS

| CIRCUIT SIZE | ITEM NUMBER | PLATING OPTION | SHELL PCB OPTION | SHELL KEY OPTION |
|--------------|-------------|----------------|------------------|------------------|
| 36           | 75784-0107  | OPTION 1       | RETENTION        | LEFT             |
| 36           | 75784-0108  | OPTION 1       | RETENTION        | RIGHT            |
| 36           | 75784-0109  | OPTION 1       | RETENTION        | DUAL             |
| 36           | 75784-0110  | OPTION 1       | SMT              | LEFT             |
| 36           | 75784-0111  | OPTION 1       | SMT              | RIGHT            |
| 36           | 75784-0112  | OPTION 1       | SMT              | DUAL             |
| 36           | 75784-0119  | OPTION 2       | RETENTION        | LEFT             |
| 36           | 75784-0120  | OPTION 2       | RETENTION        | RIGHT            |
| 36           | 75784-0121  | OPTION 2       | RETENTION        | DUAL             |
| 36           | 75784-0122  | OPTION 2       | SMT              | LEFT             |
| 36           | 75784-0123  | OPTION 2       | SMT              | RIGHT            |
| 36           | 75784-0124  | OPTION 2       | SMT              | DUAL             |
| 36           | 75784-0125  | OPTION 1       | RETENTION        | UNIVERSAL        |
| 36           | 75784-0126  | OPTION 1       | SMT              | UNIVERSAL        |
| 36           | 75784-0127  | OPTION 2       | RETENTION        | UNIVERSAL        |
| 36           | 75784-0128  | OPTION 2       | SMT              | UNIVERSAL        |
| 36           | 75784-0129  | OPTION 1       | T/H 1.96         | LEFT             |
| 36           | 75784-0130  | OPTION 1       | T/H 1.96         | RIGHT            |
| 36           | 75784-0131  | OPTION 1       | T/H 1.96         | DUAL             |
| 36           | 75784-0132  | OPTION 1       | T/H 1.96         | UNIVERSAL        |
| 36           | 75784-0133  | OPTION 2       | T/H 1.96         | LEFT             |
| 36           | 75784-0134  | OPTION 2       | T/H 1.96         | RIGHT            |
| 36           | 75784-0135  | OPTION 2       | T/H 1.96         | DUAL             |
| 36           | 75784-0136  | OPTION 2       | T/H 1.96         | UNIVERSAL        |

| CIRCUIT SIZE | ITEM NUMBER | PLATING OPTION | SHELL PCB OPTION | SHELL KEY OPTION |
|--------------|-------------|----------------|------------------|------------------|
| 36           | 75784-0137  | OPTION 1       | T/H 2.79         | LEFT             |
| 36           | 75784-0138  | OPTION 1       | T/H 2.79         | RIGHT            |
| 36           | 75784-0139  | OPTION 1       | T/H 2.79         | DUAL             |
| 36           | 75784-0140  | OPTION 1       | T/H 2.79         | UNIVERSAL        |
| 36           | 75784-0141  | OPTION 2       | T/H 2.79         | LEFT             |
| 36           | 75784-0142  | OPTION 2       | T/H 2.79         | RIGHT            |
| 36           | 75784-0143  | OPTION 2       | T/H 2.79         | DUAL             |
| 36           | 75784-0144  | OPTION 2       | T/H 2.79         | UNIVERSAL        |
| 36           | 75784-0145  | OPTION 1       | T/H 3.18         | LEFT             |
| 36           | 75784-0146  | OPTION 1       | T/H 3.18         | RIGHT            |
| 36           | 75784-0147  | OPTION 1       | T/H 3.18         | DUAL             |
| 36           | 75784-0148  | OPTION 1       | T/H 3.18         | UNIVERSAL        |
| 36           | 75784-0149  | OPTION 2       | T/H 3.18         | LEFT             |
| 36           | 75784-0150  | OPTION 2       | T/H 3.18         | RIGHT            |
| 36           | 75784-0151  | OPTION 2       | T/H 3.18         | DUAL             |
| 36           | 75784-0152  | OPTION 2       | T/H 3.18         | UNIVERSAL        |
| 36           | 75784-0153  | OPTION 1       | T/H 3.56         | LEFT             |
| 36           | 75784-0154  | OPTION 1       | T/H 3.56         | RIGHT            |
| 36           | 75784-0155  | OPTION 1       | T/H 3.56         | DUAL             |
| 36           | 75784-0156  | OPTION 1       | T/H 3.56         | UNIVERSAL        |
| 36           | 75784-0157  | OPTION 2       | T/H 3.56         | LEFT             |
| 36           | 75784-0158  | OPTION 2       | T/H 3.56         | RIGHT            |
| 36           | 75784-0159  | OPTION 2       | T/H 3.56         | DUAL             |
| 36           | 75784-0160  | OPTION 2       | T/H 3.56         | UNIVERSAL        |

iPass™ IS A TRADEMARK OF MOLEX

|                                                                                              |                                        |                                                                                                                                  |                                       |              |                                   |              |                     |                                                                                     |                            |  |
|----------------------------------------------------------------------------------------------|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|--------------|-----------------------------------|--------------|---------------------|-------------------------------------------------------------------------------------|----------------------------|--|
| <b>SEE SHEET 1</b><br>EC NO: UCP2010-1913<br>DRWN: KLANG<br>CHKD: JSWENSON<br>APPR: MBANAKIS | 2010/02/03<br>2010/03/24<br>2010/03/25 | QUALITY SYMBOLS<br>▽=0<br>▽=0                                                                                                    | GENERAL TOLERANCES (UNLESS SPECIFIED) |              | DIMENSION STYLE<br><b>MM ONLY</b> |              | SCALE<br><b>2:1</b> | DESIGN UNITS<br><b>METRIC</b>                                                       | THIRD ANGLE PROJECTION<br> |  |
|                                                                                              |                                        |                                                                                                                                  |                                       |              | DRAWN BY<br>KLANG                 |              | DATE<br>02/09/05    | TITLE<br><b>I-PASS VERT CONNECTOR<br/>INTERNAL ASSY W/SHELL<br/>0.8MM PITCH I/O</b> |                            |  |
|                                                                                              |                                        |                                                                                                                                  |                                       |              | CHECKED BY<br>JSWENSON            |              | DATE<br>02/09/05    |                                                                                     |                            |  |
|                                                                                              |                                        |                                                                                                                                  |                                       |              | APPROVED BY<br>MBANAKIS           |              | DATE<br>02/02/05    |                                                                                     |                            |  |
|                                                                                              |                                        | ANGULAR ±1/2°                                                                                                                    |                                       | MATERIAL NO. |                                   | DOCUMENT NO. |                     | SHEET NO.                                                                           |                            |  |
| DRAFT WHERE APPLICABLE<br>MUST REMAIN<br>WITHIN DIMENSIONS                                   |                                        | SEE CHART                                                                                                                        |                                       | SD-75784-001 |                                   | 6 OF 12      |                     |                                                                                     |                            |  |
| SIZE<br>C                                                                                    |                                        | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX<br>INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |                                       |              |                                   |              |                     |                                                                                     |                            |  |



50 CIRCUIT ITEM NUMBERS

| CIRCUIT SIZE | ITEM NUMBER | PLATING OPTION | SHELL PCB OPTION | SHELL KEY OPTION |
|--------------|-------------|----------------|------------------|------------------|
| 50           | 75784-0207  | OPTION 1       | RETENTION        | LEFT             |
| 50           | 75784-0208  | OPTION 1       | RETENTION        | RIGHT            |
| 50           | 75784-0209  | OPTION 1       | RETENTION        | DUAL             |
| 50           | 75784-0210  | OPTION 1       | SMT              | LEFT             |
| 50           | 75784-0211  | OPTION 1       | SMT              | RIGHT            |
| 50           | 75784-0212  | OPTION 1       | SMT              | DUAL             |
| 50           | 75784-0219  | OPTION 2       | RETENTION        | LEFT             |
| 50           | 75784-0220  | OPTION 2       | RETENTION        | RIGHT            |
| 50           | 75784-0221  | OPTION 2       | RETENTION        | DUAL             |
| 50           | 75784-0222  | OPTION 2       | SMT              | LEFT             |
| 50           | 75784-0223  | OPTION 2       | SMT              | RIGHT            |
| 50           | 75784-0224  | OPTION 2       | SMT              | DUAL             |
| 50           | 75784-0225  | OPTION 1       | RETENTION        | UNIVERSAL        |
| 50           | 75784-0226  | OPTION 1       | SMT              | UNIVERSAL        |
| 50           | 75784-0227  | OPTION 2       | RETENTION        | UNIVERSAL        |
| 50           | 75784-0228  | OPTION 2       | SMT              | UNIVERSAL        |
| 50           | 75784-0229  | OPTION 1       | T/H 1.96         | LEFT             |
| 50           | 75784-0230  | OPTION 1       | T/H 1.96         | RIGHT            |
| 50           | 75784-0231  | OPTION 1       | T/H 1.96         | DUAL             |
| 50           | 75784-0232  | OPTION 1       | T/H 1.96         | UNIVERSAL        |
| 50           | 75784-0233  | OPTION 2       | T/H 1.96         | LEFT             |
| 50           | 75784-0234  | OPTION 2       | T/H 1.96         | RIGHT            |
| 50           | 75784-0235  | OPTION 2       | T/H 1.96         | DUAL             |
| 50           | 75784-0236  | OPTION 2       | T/H 1.96         | UNIVERSAL        |

| CIRCUIT SIZE | ITEM NUMBER | PLATING OPTION | SHELL PCB OPTION | SHELL KEY OPTION |
|--------------|-------------|----------------|------------------|------------------|
| 50           | 75784-0237  | OPTION 1       | T/H 2.79         | LEFT             |
| 50           | 75784-0238  | OPTION 1       | T/H 2.79         | RIGHT            |
| 50           | 75784-0239  | OPTION 1       | T/H 2.79         | DUAL             |
| 50           | 75784-0240  | OPTION 1       | T/H 2.79         | UNIVERSAL        |
| 50           | 75784-0241  | OPTION 2       | T/H 2.79         | LEFT             |
| 50           | 75784-0242  | OPTION 2       | T/H 2.79         | RIGHT            |
| 50           | 75784-0243  | OPTION 2       | T/H 2.79         | DUAL             |
| 50           | 75784-0244  | OPTION 2       | T/H 2.79         | UNIVERSAL        |
| 50           | 75784-0245  | OPTION 1       | T/H 3.18         | LEFT             |
| 50           | 75784-0246  | OPTION 1       | T/H 3.18         | RIGHT            |
| 50           | 75784-0247  | OPTION 1       | T/H 3.18         | DUAL             |
| 50           | 75784-0248  | OPTION 1       | T/H 3.18         | UNIVERSAL        |
| 50           | 75784-0249  | OPTION 2       | T/H 3.18         | LEFT             |
| 50           | 75784-0250  | OPTION 2       | T/H 3.18         | RIGHT            |
| 50           | 75784-0251  | OPTION 2       | T/H 3.18         | DUAL             |
| 50           | 75784-0252  | OPTION 2       | T/H 3.18         | UNIVERSAL        |

iPass™ IS A TRADEMARK OF MOLEX

|                                                                                                                                        |                    |                                                            |                                                                                                                                                                    |                                                                                                                                                      |                                                                  |                                                                                                                                  |                                                                                  |  |
|----------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|--|
| SEE SHEET 1<br>EC NO: UCP2010-1913<br>2010/02/03<br>DRAWN BY: DRWN:KLANG<br>2010/03/24<br>CHKD:JSWENSON<br>2010/03/25<br>APPR:MBANAKIS | DESCRIPTION<br>REV | QUALITY SYMBOLS<br>▽=0<br>▽=0                              | GENERAL TOLERANCES (UNLESS SPECIFIED)<br>mm INCH<br>4 PLACES ± --- ± ---<br>3 PLACES ± --- ± ---<br>2 PLACES ± 0.13 ± ---<br>1 PLACE ± 0.25 ± ---<br>ANGULAR ±1/2° | DIMENSION STYLE<br>MM ONLY<br>DRAWN BY: KLANG<br>DATE: 02/09/05<br>CHECKED BY: JSWENSON<br>DATE: 02/09/05<br>APPROVED BY: MBANAKIS<br>DATE: 02/02/05 | SCALE<br>2:1<br>DESIGN UNITS<br>METRIC<br>THIRD ANGLE PROJECTION | TITLE<br>I-PASS VERT CONNECTOR<br>INTERNAL ASSY W/SHELL<br>0.8MM PITCH I/O                                                       | MOLEX MOLEX INCORPORATED<br>DOCUMENT NO.<br>SD-75784-001<br>SHEET NO.<br>7 OF 12 |  |
|                                                                                                                                        |                    | DRAFT WHERE APPLICABLE<br>MUST REMAIN<br>WITHIN DIMENSIONS |                                                                                                                                                                    |                                                                                                                                                      | SEE CHART                                                        | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX<br>INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |                                                                                  |  |
|                                                                                                                                        |                    |                                                            |                                                                                                                                                                    |                                                                                                                                                      |                                                                  |                                                                                                                                  |                                                                                  |  |
|                                                                                                                                        |                    |                                                            |                                                                                                                                                                    |                                                                                                                                                      |                                                                  |                                                                                                                                  |                                                                                  |  |
|                                                                                                                                        |                    |                                                            |                                                                                                                                                                    |                                                                                                                                                      |                                                                  |                                                                                                                                  |                                                                                  |  |

## 68 CIRCUIT ITEM NUMBERS



| CIRCUIT SIZE | ITEM NUMBER | PLATING OPTION | SHELL PCB OPTION | SHELL KEY OPTION |
|--------------|-------------|----------------|------------------|------------------|
| 68           | 75784-0307  | OPTION 1       | RETENTION        | LEFT             |
| 68           | 75784-0308  | OPTION 1       | RETENTION        | RIGHT            |
| 68           | 75784-0309  | OPTION 1       | RETENTION        | DUAL             |
| 68           | 75784-0310  | OPTION 1       | SMT              | LEFT             |
| 68           | 75784-0311  | OPTION 1       | SMT              | RIGHT            |
| 68           | 75784-0312  | OPTION 1       | SMT              | DUAL             |
| 68           | 75784-0319  | OPTION 2       | RETENTION        | LEFT             |
| 68           | 75784-0320  | OPTION 2       | RETENTION        | RIGHT            |
| 68           | 75784-0321  | OPTION 2       | RETENTION        | DUAL             |
| 68           | 75784-0322  | OPTION 2       | SMT              | LEFT             |
| 68           | 75784-0323  | OPTION 2       | SMT              | RIGHT            |
| 68           | 75784-0324  | OPTION 2       | SMT              | DUAL             |
| 68           | 75784-0325  | OPTION 1       | RETENTION        | UNIVERSAL        |
| 68           | 75784-0326  | OPTION 1       | SMT              | UNIVERSAL        |
| 68           | 75784-0327  | OPTION 2       | RETENTION        | UNIVERSAL        |
| 68           | 75784-0328  | OPTION 2       | SMT              | UNIVERSAL        |
| 68           | 75784-0329  | OPTION 1       | T/H 1.96         | LEFT             |
| 68           | 75784-0330  | OPTION 1       | T/H 1.96         | RIGHT            |
| 68           | 75784-0331  | OPTION 1       | T/H 1.96         | DUAL             |
| 68           | 75784-0332  | OPTION 1       | T/H 1.96         | UNIVERSAL        |
| 68           | 75784-0333  | OPTION 2       | T/H 1.96         | LEFT             |
| 68           | 75784-0334  | OPTION 2       | T/H 1.96         | RIGHT            |
| 68           | 75784-0335  | OPTION 2       | T/H 1.96         | DUAL             |
| 68           | 75784-0336  | OPTION 2       | T/H 1.96         | UNIVERSAL        |

| CIRCUIT SIZE | ITEM NUMBER | PLATING OPTION | SHELL PCB OPTION | SHELL KEY OPTION |
|--------------|-------------|----------------|------------------|------------------|
| 68           | 75784-0337  | OPTION 1       | T/H 2.79         | LEFT             |
| 68           | 75784-0338  | OPTION 1       | T/H 2.79         | RIGHT            |
| 68           | 75784-0339  | OPTION 1       | T/H 2.79         | DUAL             |
| 68           | 75784-0340  | OPTION 1       | T/H 2.79         | UNIVERSAL        |
| 68           | 75784-0341  | OPTION 2       | T/H 2.79         | LEFT             |
| 68           | 75784-0342  | OPTION 2       | T/H 2.79         | RIGHT            |
| 68           | 75784-0343  | OPTION 2       | T/H 2.79         | DUAL             |
| 68           | 75784-0344  | OPTION 2       | T/H 2.79         | UNIVERSAL        |
| 68           | 75784-0345  | OPTION 1       | T/H 3.18         | LEFT             |
| 68           | 75784-0346  | OPTION 1       | T/H 3.18         | RIGHT            |
| 68           | 75784-0347  | OPTION 1       | T/H 3.18         | DUAL             |
| 68           | 75784-0348  | OPTION 1       | T/H 3.18         | UNIVERSAL        |
| 68           | 75784-0349  | OPTION 2       | T/H 3.18         | LEFT             |
| 68           | 75784-0350  | OPTION 2       | T/H 3.18         | RIGHT            |
| 68           | 75784-0351  | OPTION 2       | T/H 3.18         | DUAL             |
| 68           | 75784-0352  | OPTION 2       | T/H 3.18         | UNIVERSAL        |

iPass™ IS A TRADEMARK OF MOLEX

|                                                                                                                                  |                               |                                                                                                                                  |  |                              |                  |                                                                            |                              |                        |  |
|----------------------------------------------------------------------------------------------------------------------------------|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------|--|------------------------------|------------------|----------------------------------------------------------------------------|------------------------------|------------------------|--|
| SEE SHEET 1<br>EC NO: UCP2010-1913<br>2010/02/03<br>DRAWN: KLANG<br>CHKD: JSWENSON<br>2010/03/24<br>APPR: MBANAKIS<br>2010/03/25 | QUALITY SYMBOLS<br>▽=0<br>▽=0 | GENERAL TOLERANCES (UNLESS SPECIFIED)                                                                                            |  | DIMENSION STYLE<br>MM ONLY   |                  | SCALE<br>2:1                                                               | DESIGN UNITS<br>METRIC       | THIRD ANGLE PROJECTION |  |
|                                                                                                                                  |                               |                                                                                                                                  |  | DRAWN BY<br>KLANG            | DATE<br>02/09/05 | TITLE<br>I-PASS VERT CONNECTOR<br>INTERNAL ASSY W/SHELL<br>0.8MM PITCH I/O |                              |                        |  |
|                                                                                                                                  |                               |                                                                                                                                  |  | CHECKED BY<br>JSWENSON       | DATE<br>02/09/05 |                                                                            |                              |                        |  |
|                                                                                                                                  |                               |                                                                                                                                  |  | APPROVED BY<br>MBANAKIS      |                  | DATE<br>02/02/05                                                           | MATERIAL NO.<br>SD-75784-001 |                        |  |
| DRAFT WHERE APPLICABLE<br>MUST REMAIN<br>WITHIN DIMENSIONS                                                                       |                               | SEE CHART                                                                                                                        |  | DOCUMENT NO.<br>SD-75784-001 |                  |                                                                            |                              | SHEET NO.<br>8 OF 12   |  |
|                                                                                                                                  |                               | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX<br>INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |  |                              |                  |                                                                            |                              |                        |  |



VERTICAL CONNECTOR  
WITH RETENTION FIT & THRU-HOLE SHELL  
PCB FOOT PRINT

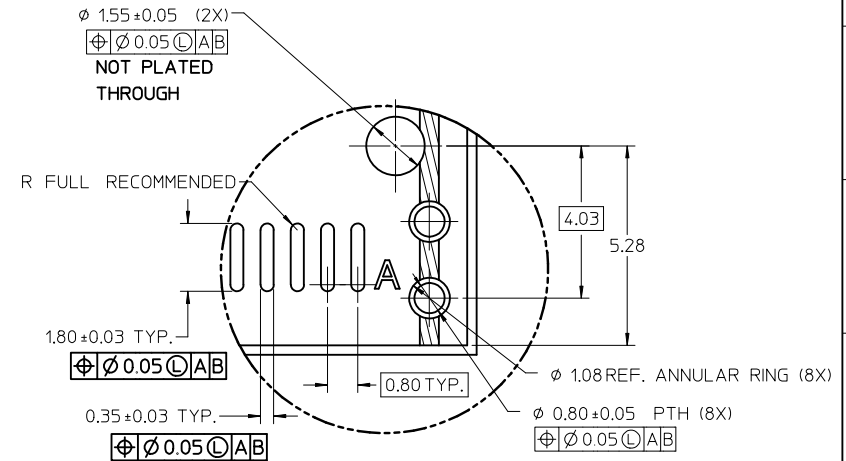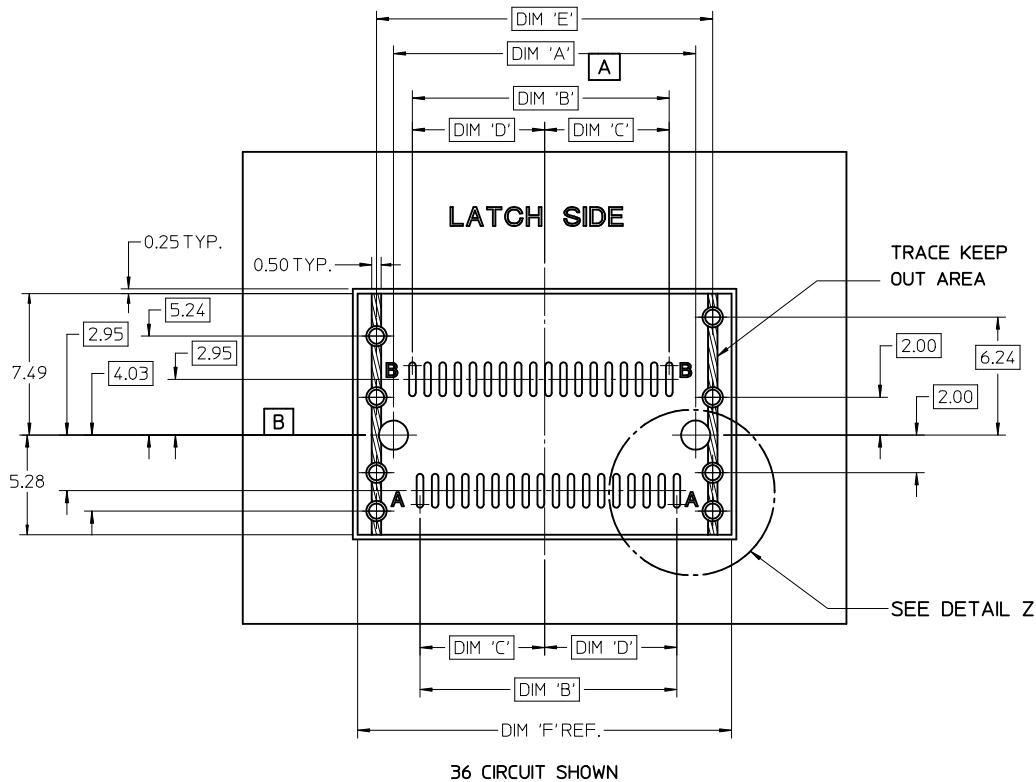

|              | PEG TO PEG | FIRST TO LAST PAD | CENTERLINE TO PAD | CENTERLINE TO PAD | SHELL PEG TO PEG | SHELL FOOTPRINT WIDTH |
|--------------|------------|-------------------|-------------------|-------------------|------------------|-----------------------|
| CIRCUIT SIZE | DIM 'A'    | DIM 'B'           | DIM 'C'           | DIM 'D'           | DIM 'E'          | DIM 'F'               |
| 26           | 12.00      | 9.60              | 4.60              | 5.00              | 13.80            | 15.80                 |
| 36           | 16.00      | 13.60             | 6.60              | 7.00              | 17.80            | 19.80                 |
| 50           | 21.60      | 19.20             | 9.40              | 9.80              | 23.40            | 25.40                 |
| 68           | 28.80      | 26.40             | 13.00             | 13.40             | 30.60            | 32.60                 |

|                                                                                                |           |                                                       |                               |                                                                                                                                                                     |                                                                                                                                                      |                                                                  |                                                                            |                                                    |                      |
|------------------------------------------------------------------------------------------------|-----------|-------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|----------------------------------------------------------------------------|----------------------------------------------------|----------------------|
| SEE SHEET 1<br>EC NO: UCP2010-1913<br>DRAWN BY: DRWINKLANG<br>CHKD: JSWENSON<br>APPR: MBANAKIS | REV<br>D2 | DESCRIPTION<br>2010/02/03<br>2010/03/24<br>2010/03/25 | QUALITY SYMBOLS<br>▽=0<br>▽=0 | GENERAL TOLERANCES (UNLESS SPECIFIED)<br>mm INCH<br>4 PLACES ± --- ± ---<br>3 PLACES ± --- ± ---<br>2 PLACES ± 0.13 ± ---<br>1 PLACE ± 0.25 ± ---<br>ANGULAR ± 1/2° | DIMENSION STYLE<br>MM ONLY<br>DRAWN BY: KLANG<br>DATE: 02/09/05<br>CHECKED BY: JSWENSON<br>DATE: 02/09/05<br>APPROVED BY: MBANAKIS<br>DATE: 02/02/05 | SCALE<br>5:1<br>DESIGN UNITS<br>METRIC<br>THIRD ANGLE PROJECTION | TITLE<br>I-PASS VERT CONNECTOR<br>INTERNAL ASSY W/SHELL<br>0.8MM PITCH I/O | MOLEX INCORPORATED<br>DOCUMENT NO.<br>SD-75784-001 | SHEET NO.<br>9 OF 12 |
|                                                                                                |           |                                                       |                               |                                                                                                                                                                     |                                                                                                                                                      |                                                                  |                                                                            |                                                    |                      |


# VERTICAL CONNECTOR WITH SMT SHELL PCB FOOT PRINT

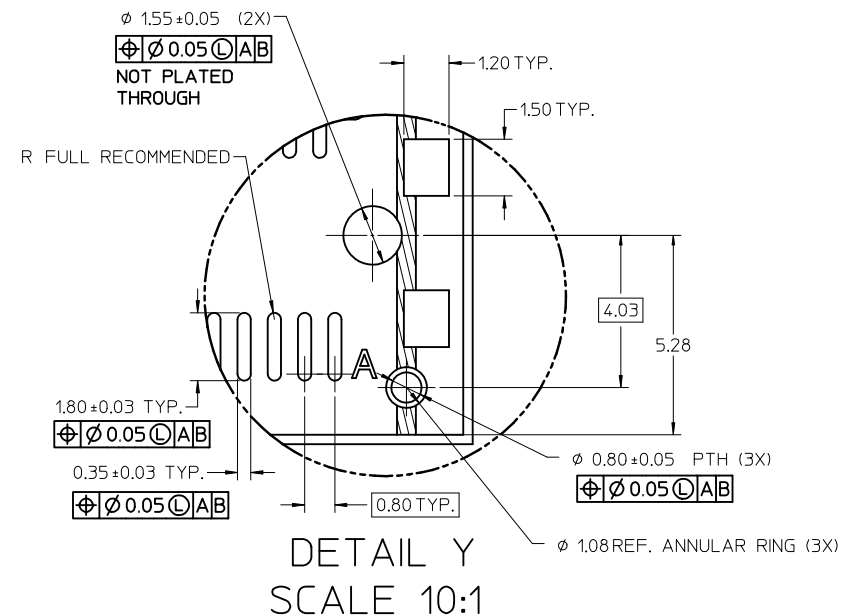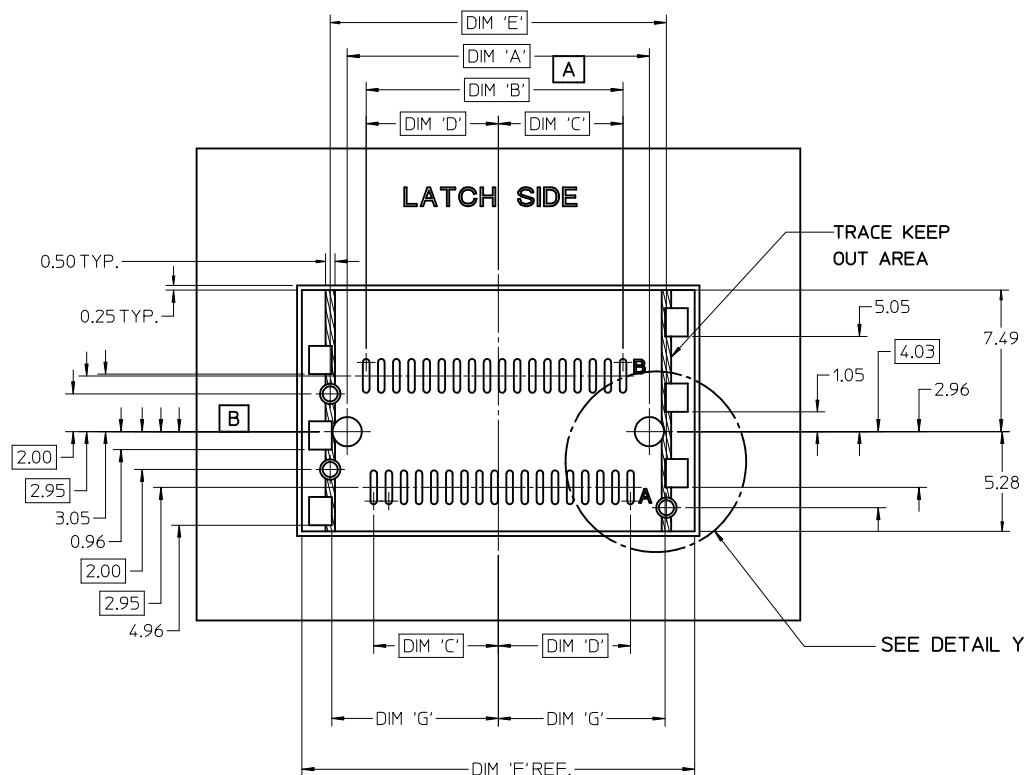

|              | PEG TO PEG | FIRST TO LAST PAD | CENTERLINE TO PAD | CENTERLINE TO PAD | SHELL PEG TO PEG | SHELL FOOTPRINT WIDTH | CENTERLINE TO PAD EDGE |
|--------------|------------|-------------------|-------------------|-------------------|------------------|-----------------------|------------------------|
| CIRCUIT SIZE | DIM 'A'    | DIM 'B'           | DIM 'C'           | DIM 'D'           | DIM 'E'          | DIM 'F'               | DIM 'G'                |
| 26           | 12.00      | 9.60              | 4.60              | 5.00              | 13.80            | 16.80                 | 6.825                  |
| 36           | 16.00      | 13.60             | 6.60              | 7.00              | 17.80            | 20.80                 | 8.825                  |
| 50           | 21.60      | 19.20             | 9.40              | 9.80              | 23.40            | 26.40                 | 11.625                 |
| 68           | 28.80      | 26.40             | 13.00             | 13.40             | 30.60            | 33.60                 | 15.225                 |

|                                                                                                |           |                                                       |                               |                                                                                                                                                                     |                                                                                                                                                      |                                                                  |                                                                                                  |                              |                       |
|------------------------------------------------------------------------------------------------|-----------|-------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|------------------------------|-----------------------|
| SEE SHEET 1<br>EC NO: UCP2010-1913<br>DRAWN BY: DRWINKLANG<br>CHKD: JSWENSON<br>APPR: MBANAKIS | REV<br>D2 | DESCRIPTION<br>2010/02/03<br>2010/03/24<br>2010/03/25 | QUALITY SYMBOLS<br>▽=0<br>▽=0 | GENERAL TOLERANCES (UNLESS SPECIFIED)<br>mm INCH<br>4 PLACES ± --- ± ---<br>3 PLACES ± --- ± ---<br>2 PLACES ± 0.13 ± ---<br>1 PLACE ± 0.25 ± ---<br>ANGULAR ± 1/2° | DIMENSION STYLE<br>MM ONLY<br>DRAWN BY: KLANG<br>DATE: 02/09/05<br>CHECKED BY: JSWENSON<br>DATE: 02/09/05<br>APPROVED BY: MBANAKIS<br>DATE: 02/02/05 | SCALE<br>5:1<br>DESIGN UNITS<br>METRIC<br>THIRD ANGLE PROJECTION | TITLE<br>I-PASS VERT CONNECTOR<br>INTERNAL ASSY W/SHELL<br>0.8MM PITCH I/O<br>MOLEX INCORPORATED | DOCUMENT NO.<br>SD-75784-001 | SHEET NO.<br>10 OF 12 |
|                                                                                                |           |                                                       |                               |                                                                                                                                                                     |                                                                                                                                                      |                                                                  |                                                                                                  |                              |                       |
|                                                                                                |           |                                                       |                               |                                                                                                                                                                     |                                                                                                                                                      |                                                                  |                                                                                                  |                              |                       |
|                                                                                                |           |                                                       |                               |                                                                                                                                                                     |                                                                                                                                                      |                                                                  |                                                                                                  |                              |                       |

# VERTICAL CONNECTOR WITH SHELL PCB FOOT PRINT DESCRIPTIONS


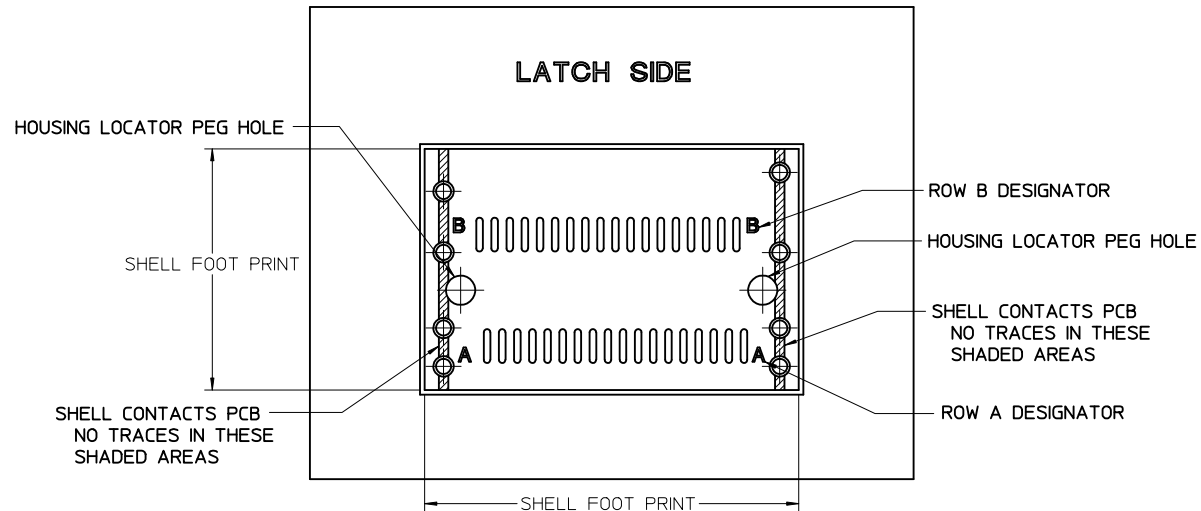


36 CIRCUIT SHOWN

iPass™ IS A TRADEMARK OF MOLEX

|                                                                                                                              |                    |                                   |                                                            |        |                            |                                                                                                                               |                  |                                                                            |                        |                          |  |  |
|------------------------------------------------------------------------------------------------------------------------------|--------------------|-----------------------------------|------------------------------------------------------------|--------|----------------------------|-------------------------------------------------------------------------------------------------------------------------------|------------------|----------------------------------------------------------------------------|------------------------|--------------------------|--|--|
| SEE SHEET 1<br>EC NO: UCP2010-1913<br>2010/02/03<br>DRWN:KLANG<br>2010/03/24<br>CHKD:JSWENSON<br>2010/03/25<br>APPR:MBANAKIS | DESCRIPTION<br>REV | QUALITY SYMBOLS<br><br>▽=0<br>▽=0 | GENERAL TOLERANCES (UNLESS SPECIFIED)                      |        | DIMENSION STYLE<br>MM ONLY |                                                                                                                               | SCALE<br>5:1     | DESIGN UNITS<br>METRIC                                                     | THIRD ANGLE PROJECTION |                          |  |  |
|                                                                                                                              |                    |                                   |                                                            | mm     | INCH                       | DRAWN BY<br>KLANG                                                                                                             | DATE<br>02/09/05 | TITLE<br>I-PASS VERT CONNECTOR<br>INTERNAL ASSY W/SHELL<br>0.8MM PITCH I/O |                        |                          |  |  |
|                                                                                                                              |                    |                                   | 4 PLACES                                                   | ± ---  | ± ---                      | CHECKED BY<br>JSWENSON                                                                                                        | DATE<br>02/09/05 |                                                                            |                        |                          |  |  |
|                                                                                                                              |                    |                                   | 3 PLACES                                                   | ± ---  | ± ---                      | APPROVED BY<br>MBANAKIS                                                                                                       |                  | DATE<br>02/02/05                                                           |                        | MOLEX MOLEX INCORPORATED |  |  |
|                                                                                                                              |                    |                                   | 2 PLACES                                                   | ± 0.13 | ± ---                      |                                                                                                                               |                  |                                                                            |                        |                          |  |  |
|                                                                                                                              |                    |                                   | 1 PLACE                                                    | ± 0.25 | ± ---                      | MATERIAL NO.                                                                                                                  |                  | DOCUMENT NO.                                                               |                        | SHEET NO.                |  |  |
|                                                                                                                              |                    |                                   | ANGULAR ±1/2°                                              |        |                            | SEE CHART                                                                                                                     |                  | SD-75784-001                                                               |                        | 11 OF 12                 |  |  |
|                                                                                                                              |                    |                                   | DRAFT WHERE APPLICABLE<br>MUST REMAIN<br>WITHIN DIMENSIONS |        |                            | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |                  |                                                                            |                        |                          |  |  |

# MATING INTERFACE (FOR REFERENCE ONLY)

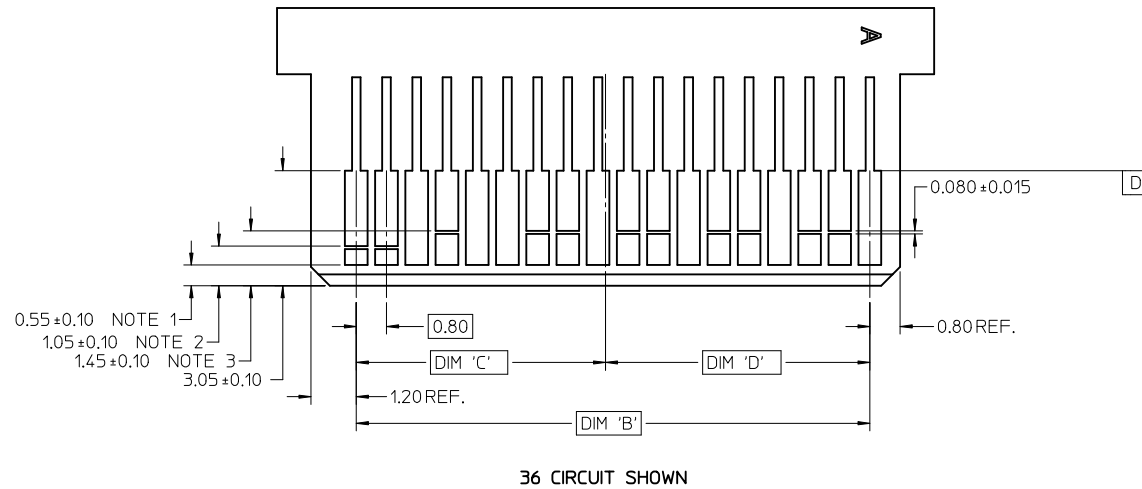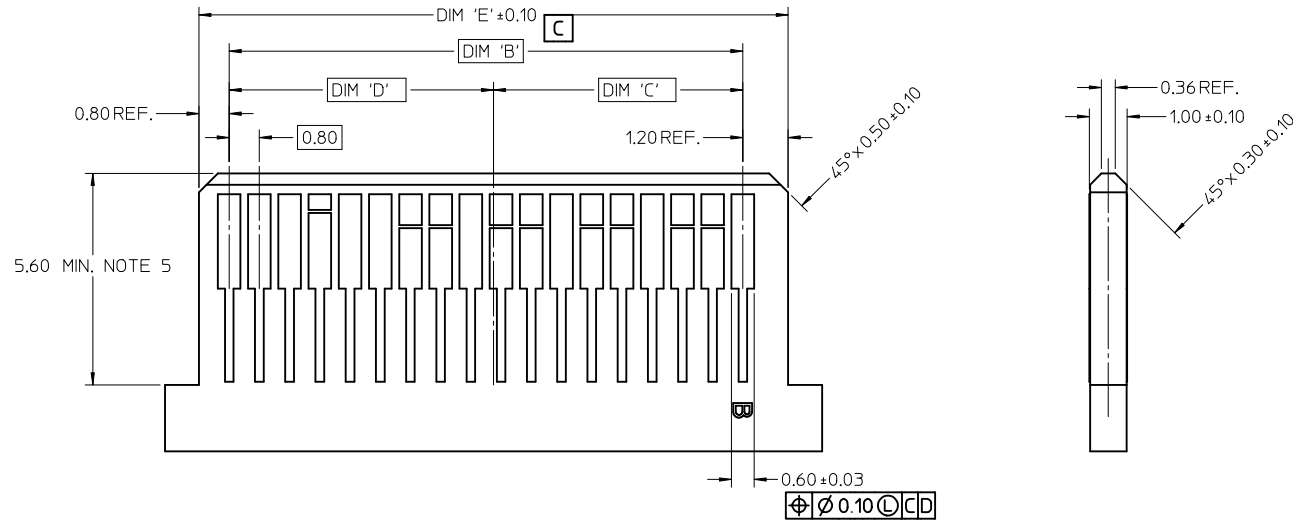

## NOTES:

- PAD CONFIGURATION FOR FIRST MATE.
- PAD CONFIGURATION FOR SECOND MATE.
- PAD CONFIGURATION FOR THIRD MATE.  
(HIGH SPEED SIGNALS)
- FOR PIN ASSIGNMENTS AND MATING SEQUENCE  
(1ST, 2ND, 3RD), SEE APPLICABLE  
SPECIFICATION.
- MINIMUM STEP REQUIRED IF PCB MADE  
WIDER THAN TOUNGE.

iPass™ IS A TRADEMARK OF MOLEX

| CIRCUIT<br>SIZE | TERM/SIDE<br>'N' | DIM 'B' | DIM 'C' | DIM 'D' | DIM 'E' |
|-----------------|------------------|---------|---------|---------|---------|
| 26              | 13               | 9.60    | 4.60    | 5.00    | 11.60   |
| 36              | 18               | 13.60   | 6.60    | 7.00    | 15.60   |
| 50              | 25               | 19.20   | 9.40    | 9.80    | 21.20   |
| 68              | 34               | 26.40   | 13.00   | 13.40   | 28.40   |

|                                                                                       |            |             |            |
|---------------------------------------------------------------------------------------|------------|-------------|------------|
| SEE SHEET 1<br>EC NO: UCP2010-1913<br>DRWN: KLANG<br>CHKD: JSWENSON<br>APPR: MBANAKIS | 2010/02/03 | 2010/03/24  | 2010/03/25 |
|                                                                                       | REV        | DESCRIPTION | REV        |
| D2                                                                                    |            |             |            |

QUALITY  
SYMBOLS  
▽=0  
▽=0

GENERAL TOLERANCES  
(UNLESS SPECIFIED)

|          | mm     | INCH  |
|----------|--------|-------|
| 4 PLACES | ± ---  | ± --- |
| 3 PLACES | ± ---  | ± --- |
| 2 PLACES | ± 0.13 | ± --- |
| 1 PLACE  | ± 0.25 | ± --- |

ANGULAR ±1/2°

DRAFT WHERE APPLICABLE  
MUST REMAIN  
WITHIN DIMENSIONS

| DIMENSION STYLE<br>MM ONLY |          |
|----------------------------|----------|
| DRAWN BY                   | DATE     |
| KLANG                      | 02/09/05 |
| CHECKED BY                 | DATE     |
| JSWENSON                   | 02/09/05 |
| APPROVED BY                | DATE     |
| MBANAKIS                   | 02/02/05 |
| MATERIAL NO.               |          |
| SIZE                       |          |
| SEE CHART                  |          |

| SCALE<br>10:1                                                                                                                    | DESIGN UNITS<br>METRIC                                            | THIRD ANGLE<br>PROJECTION |
|----------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|---------------------------|
| TITLE                                                                                                                            | I-PASS VERT CONNECTOR<br>INTERNAL ASSY W/SHELL<br>0.8MM PITCH I/O |                           |
| MOLEX                                                                                                                            | MOLEX INCORPORATED                                                |                           |
| DOCUMENT NO.                                                                                                                     | SD-75784-001                                                      | SHEET NO.<br>12 OF 12     |
| THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX<br>INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |                                                                   |                           |



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331