
Property of Lite-On Only

#### **Features**

- \* Lead (Pb) free product RoHS compliant.
- \* Low power consumption.
- \* High efficiency.
- \* Versatile mounting on P.C. Board or panel.
- \* I.C. Compatible/low current requirement.
- \* 3.1 mm diameter package..

### **Package Dimensions**

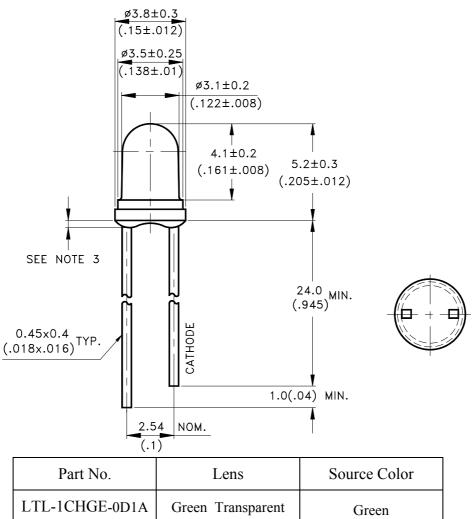

#### NOTES:

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is  $\pm 0.25$ mm(.010") unless otherwise noted.
- 3. Protruded resin under flange is 1.0mm(.04") max.
- 4. Lead spacing is measured where the leads emerge from the package.
- 5. Specifications are subject to change without notice.

Property of Lite-On Only

### Absolute Maximum Ratings at TA=25°C

Parameter	Maximum Rating	Unit	
Power Dissipation	100	mW	
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	120	mA	
DC Forward Current	30	mA	
Derating Linear From 50°C	0.4	mA/°C	
Reverse Voltage	5	V	
Operating Temperature Range	-55°C to + 100°C		
Storage Temperature Range	-55°C to + 100°C		
Lead Soldering Temperature [1.6mm(.063") From Body]	260°C for 5 Seconds		

Part No.: LTL-1CHGE-0D1A Page: 2 of 11

Property of Lite-On Only

### Electrical / Optical Characteristics at TA=25°C

Parameter	Symbol	Min.	Тур.	Max.	Unit	Test Condition
Luminous Intensity	Iv	12.6	40		mcd	IF = 10mA Note 1,4
Viewing Angle	201/2		45		deg	Note 2 (Fig.6)
Peak Emission Wavelength	λР		565		nm	Measurement  @Peak (Fig.1)
Dominant Wavelength	λd	568	573	578	nm	Note 3
Spectral Line Half-Width	Δλ		30		nm	
Forward Voltage	VF		2.1	2.6	V	$I_F = 20 \text{mA}$
Reverse Current	Ir			100	$\mu$ A	$V_R = 5V$
Capacitance	С		35		pF	$V_F = 0$ , $f = 1MHz$

- Note: 1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commission International De L'Eclairage) eye-response curve.
  - 2.  $\theta_{1/2}$  is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
  - 3. The dominant wavelength,  $\lambda$  d is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.
  - 4. The Iv guarantee should be added  $\pm 15\%$ .

Part No.: LTL-1CHGE-0D1A	Page: 3	of	11
Turt 110 ETE TEHOE OBITE	1 450.	O1	1 1

Property of Lite-On Only

### Typical Electrical / Optical Characteristics Curves

(25°C Ambient Temperature Unless Otherwise Noted)





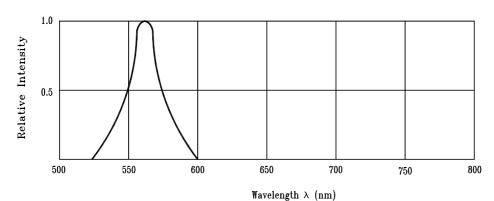


Fig.1 Relative Intensity vs. Wavelength









Ambient Temperature Ta(°C) Fig.5 Luminous Intensity vs. Ambient Temperature




Fig.6 Spatial Distribution


Part No.: LTL-1CHGE-0D1A Page: 4 of 11

Property of Lite-On Only

### **Features**

- \* Compatible with radial lead automatic insertion equipment.
- \* Most radial lead plastic lead lamps available packaged in tape and folding.
- \* 5mm (0.197") formed lead and 2.54mm (0.1") straight lead spacing available.
- \* Folding packaging simplifies handling and testing.

### **Package Dimensions**

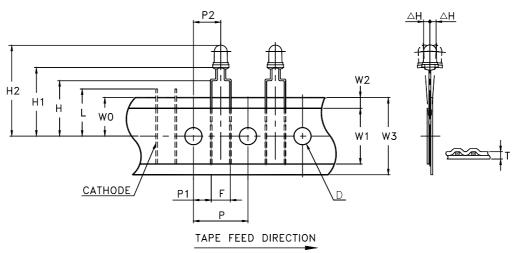


		Specification				
Item	Symbol	Minimum		Maximum		
		mm	inch	mm	inch	
Tape Feed Hole Diameter	D	3.8	0.149	4.2	0.165	
Component Lead Pitch	F	4.8	0.188	5.8	0.228	
Front to Rear Deflection	ΔН			2.0	0.078	
Height of Seating Plane	Н	15.5	0.610	16.5	0.649	
Feed Hole to Bottom of Component	H1	23.8	0.937	25.8	1.016	
Feed Hole to Overall Component Height	H2	28.7 1.129		31.3	1.232	
Lead Length After Component Height	L	W0 11.0 0.4		0.433		
Feed Hole Pitch	P	12.4	12.4 0.488		0.511	
Lead Location	P1	3.15	0.124	4.55	0.179	
Center of Component Location	P2	5.05	0.198	7.65	0.301	
Total Taped Thickness	T			0.90	0.035	
Feed Hole Location	W0	8.5	0.334	9.75	0.384	
Adhesive Tape Width	W1	14.5	0.571	15.5	0.610	
Adhesive Tape Position	W2	0	0	3.0	0.118	
Tape Width	W3	17.5	0.689	19.0	0.748	

Part No.: LTL-1CHGE-0D1A Page: 5 of 11


### Packing Spec

3000 pcs per inner carton



Tolerance: ±5mm

10 Inner cartons per outer carton total 30000 pcs per outer carton In every shipping lot, only the last pack will be non-full packing

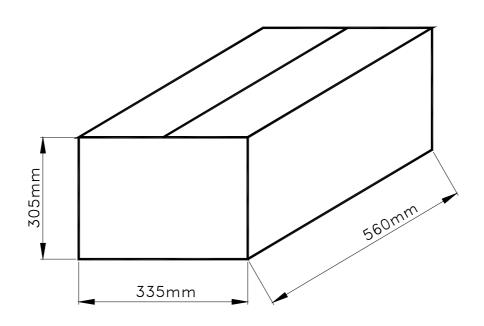

Part No.: LTL-1CHGE-0D1A Page: 6 of 11



Property of Lite-On Only

### **Bin Code List For Reference**

Luminous Intensity Unit : n		mcd @20mA
Bin Code	Min.	Max.
1	60	75
2	48	60
3	36	48
4	24	36

Note: Tolerance of each bin limit is  $\pm 15\%$ 

Dominant Wavelength Unit		nm @20mA
Bin Code	Min.	Max.
GE2	572.5	575.0
PG	570.0	572.5
GG	567.5	570.0
GE5	565.0	567.5

Note: Tolerance of each bin limit is  $\pm 1$ nm

Part No.: LTL-1CHGE-0D1A Page: 7 of 11 Property of Lite-On Only

### **CAUTIONS**

### 1. Application

The LEDs described here are intended to be used for ordinary electronic equipment (such as office equipment, communication equipment and household applications). Consult Liteon's Sales in advance for information on applications in which exceptional reliability is required, particularly when the failure or malfunction of the LEDs may directly jeopardize life or health (such as in aviation, transportation, traffic control equipment, medical and life support systems and safety devices).

### 2. Storage

The storage ambient for the LEDs should not exceed 30°C temperature or 70% relative humidity. It is recommended that LEDs out of their original packaging are used within three months. For extended storage out of their original packaging, it is recommended that the LEDs be stored in a sealed container with appropriate desiccant or in desiccators with nitrogen ambient.

### 3. Cleaning

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LEDs if necessary.

### 4. Lead Forming & Assembly

During lead forming, the leads should be bent at a point at least 3mm from the base of LED lens.

Do not use the base of the lead frame as a fulcrum during forming.

Lead forming must be done before soldering, at normal temperature.

During assembly on PCB, use minimum clinch force possible to avoid excessive mechanical stress.

#### 5. Soldering

When soldering, leave a minimum of 2mm clearance from the base of the lens to the soldering point. Dipping the lens into the solder must be avoided.

Do not apply any external stress to the lead frame during soldering while the LED is at high temperature.

Recommended soldering conditions:

Soldering iron		Wave soldering		
Temperature Soldering time	300°C Max. 3 sec. Max. (one time only)	Pre-heat Pre-heat time Solder wave Soldering time	100°C Max. 60 sec. Max. 260°C Max. 10 sec. Max.	

Note: Excessive soldering temperature and/or time might result in deformation of the LED lens or catastrophic failure of the LED. IR reflow is not suitable process for through hole type LED lamp product.

Part No.: LTL-1CHGE-0D1A	Page:	8	of	11	
--------------------------	-------	---	----	----	--


Property of Lite-On Only


### 6. Drive Method

An LED is a current-operated device. In order to ensure intensity uniformity on multiple LEDs connected in parallel in an application, it is recommended that a current limiting resistor be incorporated in the drive circuit, in series with each LED as shown in Circuit A below.

#### Circuit model A

#### Circuit model B





- (A) Recommended circuit
- (B) The brightness of each LED might appear different due to the differences in the I-V characteristics of those LEDs

### 7. ESD (Electrostatic Discharge)

Static Electricity or power surge will damage the LED.

Suggestions to prevent ESD damage:

- Use a conductive wrist band or anti- electrostatic glove when handling these LEDs
- All devices, equipment, and machinery must be properly grounded
- Work tables, storage racks, etc. should be properly grounded
- Use ion blower to neutralize the static charge which might have built up on surface of the LEDs plastic lens as a result of friction between LEDs during storage and handing

Part No.: LTL-1CHGE-0D1A Page: 9 of 11

### LITE() \ LITE-ON TECHNOLOGY CORPORATION

### Property of Lite-On Only

### Suggested checking list:

### Training and Certification

- 1. Everyone working in a static-safe area is ESD-certified?
- 2. Training records kept and re-certification dates monitored?

#### Static-Safe Workstation & Work Areas

- 1. Static-safe workstation or work-areas have ESD signs?
- 2. All surfaces and objects at all static-safe workstation and within 1 ft measure less than 100V?
- 3. All ionizer activated, positioned towards the units?
- 4. Each work surface mats grounding is good?

### Personnel Grounding

- 1. Every person (including visitors) handling ESD sensitive (ESDS) items wear wrist strap, heel strap or conductive shoes with conductive flooring?
- 2. If conductive footwear used, conductive flooring also present where operator stand or walk?
- 3. Garments, hairs or anything closer than 1 ft to ESD items measure less than 100V\*?
- 4. Every wrist strap or heel strap/conductive shoes checked daily and result recorded for all DLs?
- 5. All wrist strap or heel strap checkers calibration up to date? Note: \*50V for Blue LED.

### **Device Handling**

- 1. Every ESDS items identified by EIA-471 labels on item or packaging?
- 2. All ESDS items completely inside properly closed static-shielding containers when not at static-safe workstation?
- 3. No static charge generators (e.g. plastics) inside shielding containers with ESDS items?
- 4. All flexible conductive and dissipative package materials inspected before reuse or recycle?

#### Others

- 1. Audit result reported to entity ESD control coordinator?
- 2. Corrective action from previous audits completed?
- 3. Are audit records complete and on file?

Part No.: LTL-1CHGE-0D1A Page: 10 of 11

Property of Lite-On Only

### 8. Reliability Test

Classification	Test Item	Test Condition	Reference Standard
	Room Temp. Operation Life	If=50mA DC Ta= 25°C t= 1000hrs	MIL-STD-750D:1026 (1995) MIL-STD-883D:1005 (1991) JIS C 7021:B-1 (1982)
Endurance Test	High Temperature Operation Life	If=30mA DC Ta= 55 °C t= 1000hrs	Liteon Request
	High Temperature High Humidity Life	If=10mA DC Ta= 85 °C, 85% t= 1000hrs	Liteon Request
	High Temperature High Humidity Reverse BIAS	$Ta=65\pm5$ °C $RH=90 \sim 95\%$ VR=-5V $Test\ Time=500hrs$	MIL-STD-202: 103В JIS C 7021 : В-11(1982)
	High Temperature Storage	Ta= 100 °C t= 1000hrs	MIL-STD-883D:1008 (1991) JIS C 7021:B-10 (1982)
	Low Temperature Storage	Ta= -55 °C t= 1000hrs	JIS C 7021:B-12 (1982)
	Thermal Shock	$100 \pm 5$ °C $\sim$ -40 °C $\pm 5$ °C 30mins 5mins 30mins 500 Cycles	MIL-STD-883:1010
Environmental	Thermal Shock (2)	$80 \pm 5$ °C $\sim$ -40 °C $\pm 5$ °C 30mins 2mins 30mins 500 Cycles	Liteon Request
Test	Solder Resistance	T.sol = $260 \pm 5$ °C Dwell Time= $10 \pm 1$ secs 3 times dip.	MIL-STD-202F:210A(1980) MIL-STD-750D:2031(1995) JIS C 7021: A-1(1982)
	Solderability	T. sol = $230 \pm 5$ °C Dwell Time= $5 \pm 1$ secs	MIL-STD-202F:208D(1980) MIL-STD-750D:2026(1995) MIL-STD-883D:2003(1991) JIS C 7021: A-2(1982)

### 9. Others

The appearance and specifications of the product may be modified for improvement, without prior notice.

	1				$\dashv$
Part No. : LTL-1CHGE-0D1A	Page:	11	of	11	

### **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lite-On:

LTL-1CHGE-0D1A



Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию.

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России, а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научноисследовательскими институтами России.

С нами вы становитесь еще успешнее!

#### Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,

Промышленная ул, дом № 19, литера Н,

помещение 100-Н Офис 331