



## HCA & HCA-RA SERIES

### Hermetically Sealed AC LVDT

#### SPECIFICATIONS

- ♦ Hermetically sealed, all welded
- ♦ Stainless steel housing
- ♦ MS type connector, glass sealed
- ♦ Axial or radial electrical connection
- ♦ IEC IP68 rating to 1,000 PSI [70 bars]
- ♦ Stroke ranges from  $\pm 0.05$  to  $\pm 10$  inches
- ♦ AC operation from 400Hz to 10kHz
- ♦ Double magnetic shielding
- ♦ Through bore design (HCA-RA version)

The **HCA and HCA-RA Series** hermetically sealed LVDTs provide premium performance in harsh industrial environments. Impervious to dirt, water, steam, and corrosive liquids/vapors compatible with its materials, the HCA/HCA-RA all-welded stainless steel construction withstands external pressures up to 1,000 PSI [70 bars]. Double magnetic shielding offers excellent protection from external electromagnetic fields.

#### FEATURES

- ♦ All-welded stainless steel construction
- ♦ Glass sealed, MS type connector (MIL-C-5015)
- ♦ Shock and vibration tolerant
- ♦ Captive core eases installation (optional)
- ♦ High temperature version available (200°C)
- ♦ Calibration certificate supplied with each unit
- ♦ Right angle (HCA-RA) version available

#### APPLICATIONS

- ♦ Harsh industrial environments
- ♦ Submersible (with appropriate connector)
- ♦ Pressure vessels
- ♦ Corrosive liquid and vapor areas (check materials)
- ♦ Mild radiation areas
- ♦ Turbine valve

The HCA/HCA-RA Series can be configured with a number of standard options. A high temperature operation (200°C) model, HCA-T is also available. The HCA/HCA-RA is compatible with the full line of Measurement Specialties LVDT signal conditioners.

The HCA-RA version adds the convenience of a radial connector termination. This feature decreases the required installation space, while also allowing debris to harmlessly pass through the 'open-ended' bore.

Like in most of our LVDTs, the HCA/HCA-RA windings are vacuum impregnated with a specially formulated, high temperature, flexible resin, and the coil assembly is potted inside its housing with a two-component epoxy. This provides excellent protection against hostile environments such as high vibration and shock.

Captive core option: The HCA/HCA-RA features an optional captive core design that greatly simplifies installation. The core rod and bearing assembly includes a Bronze bearing on the front end for self-alignment, while a PTFE sleeve allows low-friction travel through the stainless steel boreliner (spool tube).

Also see our other hermetically sealed LVDT models with built-in signal conditioning: **HCD** (DC voltage), **HCT** (4-20mA, 2-wire loop) and **HC-485** (RS-485 Digital Series).

## PERFORMANCE SPECIFICATIONS

| ELECTRICAL SPECIFICATIONS          |                      |                      |                      |                      |                       |                       |                       |                       |                       |                        |
|------------------------------------|----------------------|----------------------|----------------------|----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|------------------------|
| Parameter                          | HCA<br>HCA-RA<br>050 | HCA<br>HCA-RA<br>125 | HCA<br>HCA-RA<br>250 | HCA<br>HCA-RA<br>500 | HCA<br>HCA-RA<br>1000 | HCA<br>HCA-RA<br>2000 | HCA<br>HCA-RA<br>3000 | HCA<br>HCA-RA<br>4000 | HCA<br>HCA-RA<br>5000 | HCA<br>HCA-RA<br>10000 |
| Stroke range                       | ±0.050<br>[±1.27]    | ±0.125<br>[±3.17]    | ±0.25<br>[±6.35]     | ±0.5<br>[±12.7]      | ±1<br>[±25.4]         | ±2<br>[±50.8]         | ±3<br>[±76.2]         | ±4<br>[±101.6]        | ±5<br>[±127]          | ±10<br>[±254]          |
| Sensitivity V/V/inch<br>mV/V/mm    | 4.2<br>[165]         | 2.4<br>[94.5]        | 1.6<br>[63.0]        | 1.1<br>[43.3]        | 0.84<br>[33.1]        | 0.32<br>[12.6]        | 0.20<br>[7.9]         | 0.18<br>[4.6]         | 0.16<br>[6.3]         | 0.13<br>[5.1]          |
| Output at stroke<br>ends, mV/V (*) | 210                  | 300                  | 400                  | 550                  | 840                   | 640                   | 600                   | 720                   | 800                   | 1,300                  |
| Phase shift                        | +6°                  | +5°                  | +5°                  | +2°                  | +1°                   | -1°                   | +1°                   | +3°                   | -5°                   | -6°                    |
| Input impedance<br>(PRIMARY)       | 430Ω                 | 1710Ω                | 800Ω                 | 900Ω                 | 900Ω                  | 525Ω                  | 930Ω                  | 1000Ω                 | 1200Ω                 | 930Ω                   |
| Output impedance<br>(SECONDARY)    | 950Ω                 | 1820Ω                | 940Ω                 | 1150Ω                | 2100Ω                 | 535Ω                  | 1040Ω                 | 580Ω                  | 1640Ω                 | 3000Ω                  |
| Non-linearity                      | ±% of FR             |                      |                      |                      |                       |                       |                       |                       |                       |                        |
| @100% stroke<br>(maximum)          | 0.25                 | 0.25                 | 0.25                 | 0.25                 | 0.25                  | 0.25                  | 0.25                  | 0.25                  | 0.25                  | 0.25                   |
| @125% stroke                       | 0.25                 | 0.25                 | 0.30                 | 0.30                 | 0.35                  | 0.40<br>(**)          | 0.50                  | /                     | 0.80                  | 0.90<br>(**)           |
| @150% stroke                       | 0.50                 | 0.50                 | 0.50                 | 0.55<br>(**)         | 0.55<br>(**)          | 0.70<br>(**)          | 1.00<br>(**)          | /                     | /                     | /                      |
| Input voltage                      | 3 VRMS sine wave     |                      |                      |                      |                       |                       |                       |                       |                       |                        |
| Input frequency                    | 400Hz to 10kHz       |                      |                      |                      |                       |                       |                       |                       |                       |                        |
| Test frequency                     | 2.5kHz               |                      |                      |                      |                       |                       |                       |                       |                       |                        |
| Null voltage                       | 0.5% of FRO, maximum |                      |                      |                      |                       |                       |                       |                       |                       |                        |

| ENVIRONMENTAL SPECIFICATIONS & MATERIALS |                                                                      |
|------------------------------------------|----------------------------------------------------------------------|
| Operating temperature                    | -65°F to +300°F [-55°C to 150°C]                                     |
| Shock survival                           | 1,000 g (11ms half-sine)                                             |
| Vibration tolerance                      | 20 g up to 2kHz                                                      |
| Housing material                         | AISI 400 Series stainless steel                                      |
| Electrical connector                     | 6-pin MS type connector (MIL-C-5015)                                 |
| IEC 60529 rating                         | IP68 to 1,000 PSI [70 bars] with use of proper mating connector plug |

Notes

All values are nominal unless otherwise noted

Electrical specifications are for the test frequency indicated in the table

Dimensions are in inch [mm] unless otherwise noted

FR: Full Range is the stroke range, end to end; FR=2xS for ±S stroke range


FRO (Full Range Output): Algebraic difference in outputs measured at the ends of the range

(\*) Unit for output at stroke ends is millivolt per volt of excitation (input voltage)

(\*\*) Requires special reduced core length

### MECHANICAL SPECIFICATIONS – NON CAPTIVE CORE (STANDARD)

| Parameter                     | HCA<br>HCA-RA<br>050 | HCA<br>HCA-RA<br>125 | HCA<br>HCA-RA<br>250 | HCA<br>HCA-RA<br>500 | HCA<br>HCA-RA<br>1000 | HCA<br>HCA-RA<br>2000 | HCA<br>HCA-RA<br>3000 | HCA<br>HCA-RA<br>4000 | HCA<br>HCA-RA<br>5000 | HCA<br>HCA-RA<br>10000 |
|-------------------------------|----------------------|----------------------|----------------------|----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|------------------------|
| Body length "A"               | 1.66<br>[42.2]       | 2.50<br>[63.5]       | 3.36<br>[85.3]       | 5.05<br>[128.3]      | 7.29<br>[185.2]       | 10.68<br>[271.3]      | 15.76<br>[400.3]      | 16.17<br>[410.7]      | 19.70<br>[500.4]      | 33.82<br>[859.0]       |
| Core length "B"               | 0.59<br>[15.0]       | 1.10<br>[27.9]       | 1.80<br>[45.7]       | 3.00<br>[76.2]       | 3.80<br>[96.5]        | 5.30<br>[134.6]       | 6.20<br>[157.5]       | 6.20<br>[157.5]       | 6.20<br>[157.5]       | 12.00<br>[304.8]       |
| Bore depth "C"<br>HCA only    | 1.07<br>[27.2]       | 1.91<br>[48.5]       | 2.77<br>[70.4]       | 4.46<br>[113.3]      | 6.72<br>[170.7]       | 10.20<br>[259.1]      | 15.17<br>[385.3]      |                       | 19.12<br>[485.6]      | 33.23<br>[844.0]       |
| Core center<br>at null "P"    | 0.55<br>[14.0]       | 0.96<br>[24.4]       | 1.39<br>[35.3]       | 2.23<br>[56.6]       | 3.32<br>[84.3]        | 4.91<br>[124.7]       | 7.59<br>[192.8]       | 7.87<br>[199.9]       | 9.56<br>[242.8]       | 16.61<br>[421.9]       |
| HCA body weight<br>oz [g]     | 1.20<br>[34]         | 1.73<br>[49]         | 2.22<br>[63]         | 2.93<br>[83]         | 5.22<br>[148]         | 5.65<br>[160]         | 8.33<br>[236]         | 8.50<br>[241]         | 10.31<br>[292]        | 18.57<br>[526]         |
| HCA-RA body<br>weight, oz [g] | 2.26<br>[64]         | 2.79<br>[79]         | 3.28<br>[93]         | 3.98<br>[113]        | 6.28<br>[178]         | 6.70<br>[190]         | 9.38<br>[266]         | 9.60<br>[272]         | 11.35<br>[322]        | 19.61<br>[556]         |
| Core weight<br>oz [g]         | 0.07<br>[2]          | 0.11<br>[3]          | 0.14<br>[4]          | 0.28<br>[8]          | 0.39<br>[11]          | 0.46<br>[13]          | 0.60<br>[17]          | 0.60<br>[17]          | 0.60<br>[17]          | 0.85<br>[24]           |

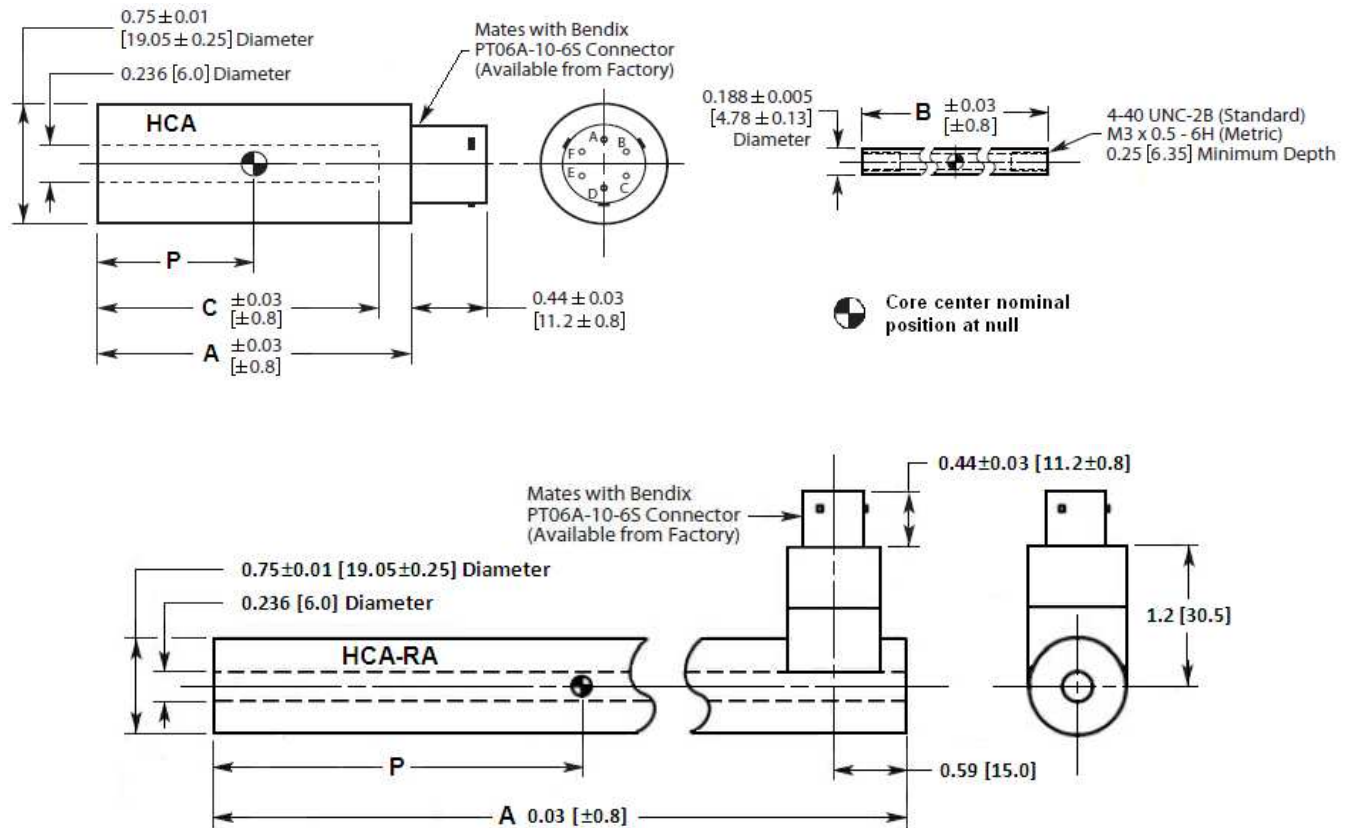

Dimensions are in inch [mm]



## ORDERING INFORMATION

| Description      | HCA Model | Part Number  |
|------------------|-----------|--------------|
| ±0.050 inch LVDT | HCA 050   | 02560413-000 |
| ±0.125 inch LVDT | HCA 125   | 02560414-000 |
| ±0.25 inch LVDT  | HCA 250   | 02560415-000 |
| ±0.5 inch LVDT   | HCA 500   | 02560416-000 |
| ±1 inch LVDT     | HCA 1000  | 02560417-000 |
| ±2 inch LVDT     | HCA 2000  | 02560418-000 |
| ±3 inch LVDT     | HCA 3000  | 02560419-000 |
| ±4 inch LVDT     | HCA 4000  | 72560000-000 |
| ±5 inch LVDT     | HCA 5000  | 02560420-000 |
| ±10 inch LVDT    | HCA 10000 | 02560421-000 |

| Description      | HCA-RA Model | Part Number  |
|------------------|--------------|--------------|
| ±0.050 inch LVDT | HCA-RA 050   | 02560413-500 |
| ±0.125 inch LVDT | HCA-RA 125   | 02560414-500 |
| ±0.25 inch LVDT  | HCA-RA 250   | 02560415-500 |
| ±0.5 inch LVDT   | HCA-RA 500   | 02560416-500 |
| ±1 inch LVDT     | HCA-RA 1000  | 02560417-500 |
| ±2 inch LVDT     | HCA-RA 2000  | 02560418-500 |
| ±3 inch LVDT     | HCA-RA 3000  | 02560419-500 |
| ±4 inch LVDT     | HCA-RA 4000  | 72560000-500 |
| ±5 inch LVDT     | HCA-RA 5000  | 02560420-500 |
| ±10 inch LVDT    | HCA-RA 10000 | 02560421-500 |

| OPTIONS                                                                       |                                               |             |
|-------------------------------------------------------------------------------|-----------------------------------------------|-------------|
| Description                                                                   | Comments                                      | Part Number |
| 5.0 kHz calibration                                                           | HCA/HCA-RA 050 through<br>HCA/HCA-RA 500 only | xxxxxxx-002 |
| 10 kHz calibration                                                            |                                               | xxxxxxx-003 |
| Metric threaded core (Non-captive) or connecting rod (Captive core)           | All                                           | xxxxxxx-006 |
| Guided core                                                                   | Available on<br>non-captive core models only  | xxxxxxx-010 |
| Small-diameter/low-mass core <i>(consult factory for mass and dimensions)</i> |                                               | xxxxxxx-020 |
| Captive core                                                                  | HCA/HCA-RA 050 through<br>HCA-RA 3000 only    | xxxxxxx-200 |

Note: Add multiple option dash numbers together to determine proper ordering suffix

Example: HCA-RA 1000, ±1 inch, right angle connector model, with captive core and 5 kHz calibration, P/N 0256417-702

| ACCESSORIES FOR HCA AND HCA-RA                                      |                               |              |
|---------------------------------------------------------------------|-------------------------------|--------------|
| Description                                                         | Comments                      | Part Number  |
| Core connecting rod, 6 inches long, 4-40 threads                    |                               | 05282946-006 |
| Core connecting rod, 12 inches long, 4-40 threads                   |                               | 05282946-012 |
| Core connecting rod, 24 inches long, 4-40 threads                   |                               | 05282946-024 |
| Core connecting rod, 36 inches long, 4-40 threads                   |                               | 05282946-036 |
| Core connecting rod, 6 inches long, M3x0.5 metric threads           |                               | 05282977-006 |
| Core connecting rod, 12 inches long, M3x0.5 metric threads          |                               | 05282977-012 |
| Mounting block                                                      |                               | 04560950-000 |
| Mating connector kit                                                | PT06A-10-6S(SR)               | 62101011-000 |
| Interconnect cable for LVM-110 and LiM 4-20 Signal Conditioners (1) | HCA/HCA-RA to Stripped/Tinned | 04290417-000 |
| Interconnect cable for IEM-422 Signal Conditioner (1)               | HCA/HCA-RA to PTO6A-10-6P     | 04290133-000 |
| Interconnect cable for ATA-2001 Signal Conditioner (1)              | HCA/HCA-RA to DB-9P           | 04290457-000 |
| Interconnect cable for MP-2000 Series Set-Point Controller (1)      | HCA/HCA-RA to 05BL5M          | 04290560-000 |
| Interconnect cable for LDM/PML-1000 Signal Conditioners, 200°C (1)  | HCA/HCA-RA to Stripped/Tinned | 04290595-000 |

(1) All cables are shielded, 10 foot long, and rated 80°C [176°F] operating unless otherwise noted. Consult factory for other lengths.

## HCA & HCA-RA SERIES

Hermetically Sealed AC LVDT

---

### NORTH AMERICA

Measurement Specialties, Inc.,  
a TE Connectivity company  
Tel: 800-522-6752  
Email: [customercare.frmr@te.com](mailto:customercare.frmr@te.com)

### EUROPE

Measurement Specialties (Europe), Ltd.,  
a TE Connectivity Company  
Tel: 800-440-5100  
Email: [customercare.bevx@te.com](mailto:customercare.bevx@te.com)

### ASIA

Measurement Specialties (China) Ltd.,  
a TE Connectivity company  
Tel: 0400-820-6015  
Email: [customercare.shzn@te.com](mailto:customercare.shzn@te.com)

[TE.com/sensorsolutions](http://TE.com/sensorsolutions)

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331