

# General Specifications

## Electrical Capacity (Resistive Load)

**Power Level:** 6A @ 125V AC or 3A @ 250V AC

## Other Ratings

|                               |                                                                                                                            |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| <b>Contact Resistance:</b>    | 10 milliohms maximum                                                                                                       |
| <b>Insulation Resistance:</b> | 1,000 megohms minimum @ 500V DC                                                                                            |
| <b>Dielectric Strength:</b>   | 1,000V AC minimum between contacts for 1 minute minimum;<br>1,500V AC minimum between contacts & case for 1 minute minimum |
| <b>Mechanical Life:</b>       | 50,000 operations minimum                                                                                                  |
| <b>Electrical Life:</b>       | 25,000 operations minimum                                                                                                  |
| <b>Contact Timing:</b>        | Nonshorting (break-before-make)                                                                                            |
| <b>Total Travel:</b>          | .087" (2.2mm)                                                                                                              |

## Materials & Finishes

|                             |                                                          |
|-----------------------------|----------------------------------------------------------|
| <b>Actuator:</b>            | Polyamide (UL94V-0)                                      |
| <b>Frame:</b>               | Stainless steel                                          |
| <b>Case:</b>                | Glass fiber reinforced diallyl phthalate resin (UL94V-0) |
| <b>Movable Contacts:</b>    | Silver alloy                                             |
| <b>Stationary Contacts:</b> | Silver capped copper with silver plating                 |
| <b>Terminals:</b>           | Copper or brass with silver plating                      |

## Environmental Data

|                              |                                                                                                                                                 |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Operating Temp Range:</b> | -10°C through +55°C (+14°F through +131°F)                                                                                                      |
| <b>Humidity:</b>             | 90 ~ 95% humidity for 240 hours @ 40°C (104°F)                                                                                                  |
| <b>Vibration:</b>            | 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range<br>& returning in 1 minute; 3 right angled directions for 2 hours |
| <b>Shock:</b>                | 50G (490m/s <sup>2</sup> ) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)                                  |

## Processing

|                                   |                                                                                                                                                                                                    |
|-----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Soldering Time &amp; Temp:</b> | Wave Soldering Recommended (PC version): See Profile A in Supplement section.<br>Manual Soldering: See Profile A in Supplement section.<br>Note: Lever must be in center position while soldering. |
| <b>Cleaning:</b>                  | These devices are not process sealed. Hand clean locally using alcohol based solution.                                                                                                             |

## Standards & Certifications

|                                |                               |
|--------------------------------|-------------------------------|
| <b>Flammability Standards:</b> | UL94V-0 rated actuator & case |
|--------------------------------|-------------------------------|

# Distinctive Characteristics

Bright, LED illumination at top of actuator.

Over-center actuator block and plunger design gives crisp actuation, diminishes sparking, and increases operating life.

Guide interlocked with actuator block prevents window locking and maintains correct plunger alignment to assure contact stability.


Antijamming design protects contacts from damage due to excessive downward force on the actuator.

High internal barriers between poles and insulating sheet between case and actuator block give added protection to contacts.


Prominent external insulating barriers increase insulation resistance and dielectric strength.

Epoxy sealed terminals prevent entry of flux, solvents, and other contaminants.


Clinching of frame to case well above base and terminals provides 1,500V dielectric strength.

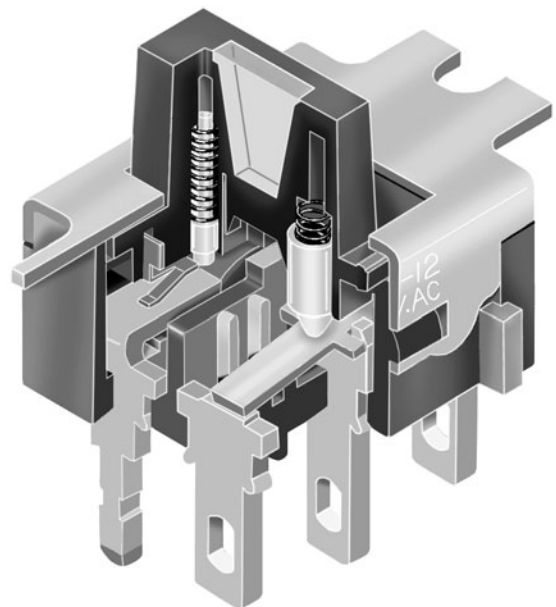

Actual Size

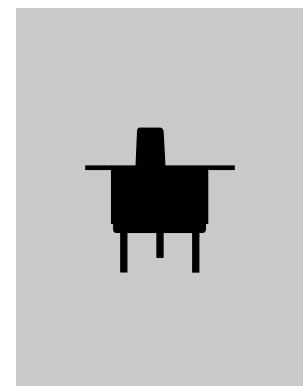


### TYPICAL SWITCH ORDERING EXAMPLE

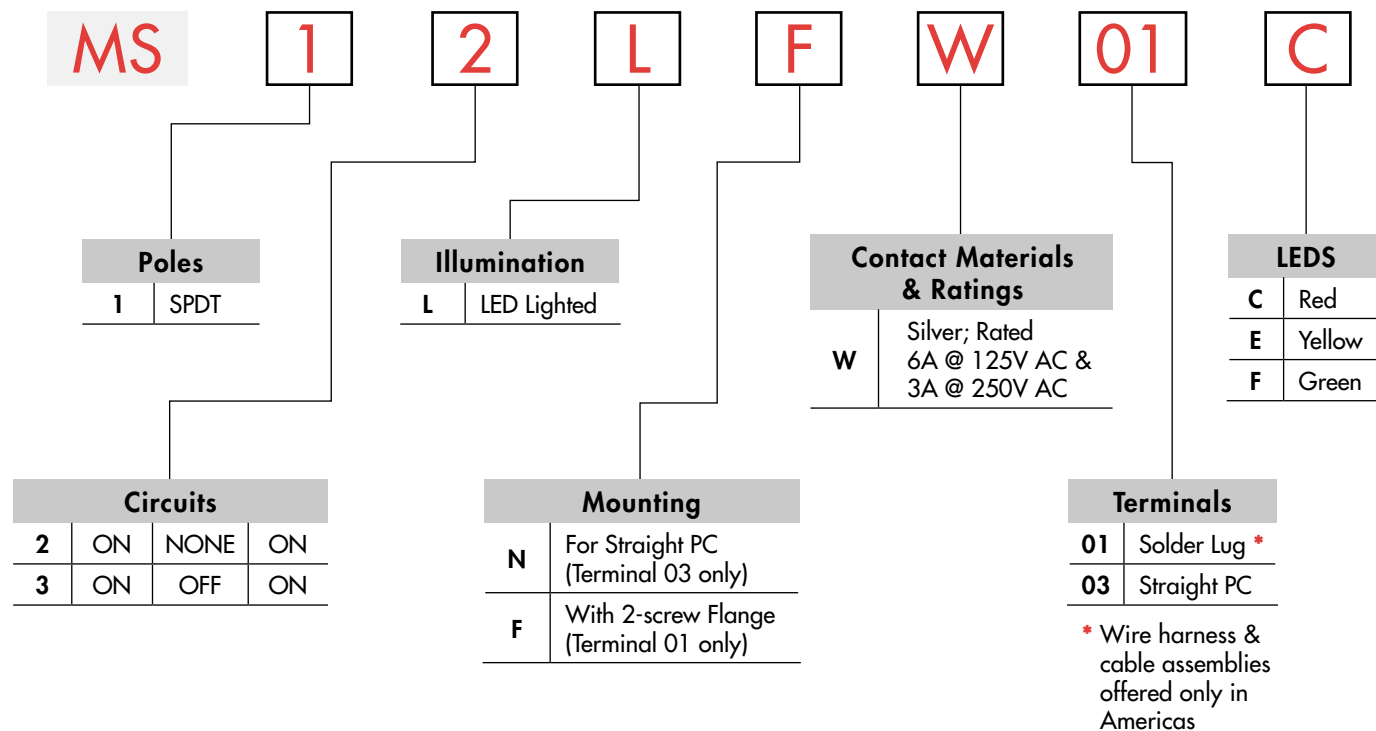


### DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

**MS12LFW01C**

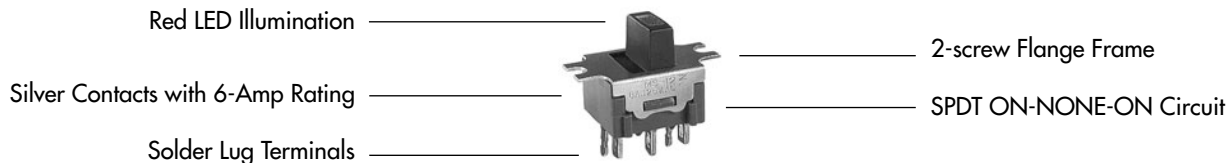

### POLES & CIRCUITS

|      |              | Slide Position |             |          | Connected Terminals |        |       | Throw & Schematics                                                                                                  |
|------|--------------|----------------|-------------|----------|---------------------|--------|-------|---------------------------------------------------------------------------------------------------------------------|
| Pole | Model        | Left           | Center      | Right    | Left                | Center | Right | Note: Terminal numbers are not actually on the switch. LED circuit is isolated and requires an external connection. |
| SP   | MS12<br>MS13 | ON<br>ON       | NONE<br>OFF | ON<br>ON | 2-1<br>OPEN         | 2-3    | 2-3   |                                                                                                                     |



### CONTACT MATERIALS & RATINGS



Silver over Silver

Power Level


6A @ 125V AC & 3A @ 250V AC

## MOUNTING TYPES & TERMINALS

**N** Straight PC Mount  
(Combines with  
Straight PC Terminal  
03 only)




**03** Straight PC



**F** 2-screw Flange  
(Combines with Solder  
Lug Terminal 01 only)



**01** Solder Lug





## LED COLORS & SPECIFICATIONS

LEDs are supplied as an integral part of the switch (not available separately). The lamp circuit is independent of switch operation. Electrical specifications shown are determined at a basic temperature of 25°C. If the source voltage exceeds the rated voltage, a ballast resistor is required. The resistor value can be calculated by using the formula given in the Supplement.


|                                   |              | <b>C</b> Red | <b>E</b> Yellow | <b>F</b> Green |
|-----------------------------------|--------------|--------------|-----------------|----------------|
| Forward Peak Current              | $I_{FM}$     | 30mA         | 30mA            | 25mA           |
| Typical Forward Current           | $I_F$        | 16mA         | 16mA            | 16mA           |
| Forward Voltage                   | $V_F$        | 1.98V        | 2.06V           | 2.16V          |
| Reverse Peak Voltage              | $V_{RM}$     | 5V           | 5V              | 5V             |
| Current Reduction Rate Above 25°C | $\Delta I_F$ | 0.40mA/°C    | 0.42mA/°C       | 0.33mA/°C      |
| Ambient Temperature Range         |              | -15° ~ +60°C |                 |                |

## TYPICAL SWITCH DIMENSIONS


### Solder Lug Terminals



Actuator in LEFT Position



Maximum Panel Thickness .197" (5.0mm)





Direction of Actuation





MS12LFW01C

### Straight PC Terminals



Actuator in LEFT Position



Direction of Actuation



MS12LNW03C



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331