


17H

D-Sub connectors - Stamped and Formed Contacts

DUAL PORT D-SUB CONNECTORS

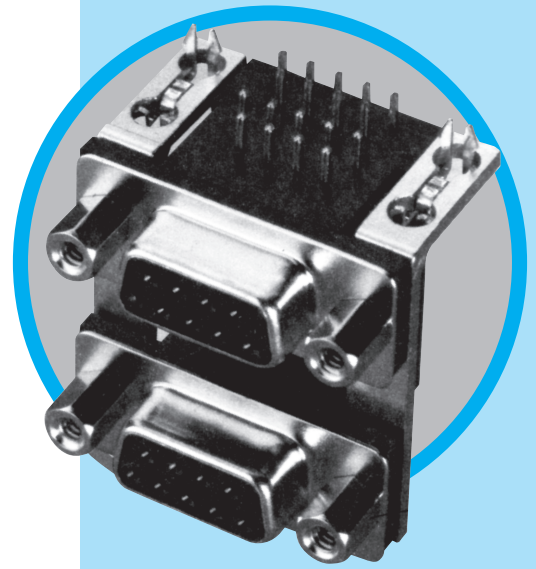

MAIN CHARACTERISTICS

Specifications

- Connectors according to MIL C24308

| Materials and platings | |
|------------------------|---|
| Shells | Steel, tin plated |
| Insulator | Glass-filled thermoplastic, UL 94V-0 |
| Pin contacts | Brass, selected gold in mating area; 2.54µm (100µ") min. tin on termination area over 1.27µm (50µ") min. nickel |
| Socket contact | Phosphor bronze, selected gold in mating area; 2.54µm (100µ") min. tin on termination area over 1.27µm (50µ") min. nickel |
| Rear insert | Brass, 2.54µm (100µ") min. nickel plated |
| Boardlock | Phosphor bronze, 2.54µm (100µ") min. tin plated |
| Screwlock | Brass, 2.54µm (100µ") min. nickel plated |

| Electrical Data | |
|-----------------------|----------------------------------|
| Current rating | 3A |
| Voltage rating | 250V AC/rms 60Hz |
| Withstanding voltage | 1000V AC/rms 60Hz for one minute |
| Insulation resistance | 1000MΩ |
| Contact resistance | 20mΩ max |

| Climatic Data | |
|-----------------------|-----------------|
| Operating temperature | -55°C to +125°C |
| Salt spray | 24 hours |

| Mechanical Data | | |
|---------------------------------|--|--------------|
| Single contact insertion force | 0.54kg (1.19lb) max | |
| Single contact withdrawal force | 0.06kg (0.13lb) min | |
| Mating and unmating force | Unit: kg (lb) | |
| | | |
| No. of Cts | Mate (max) | Unmate (min) |
| 9 | 3.05 (6.74) | 0.36 (0.79) |
| 15 | 5.09 (11.24) | 0.46 (1.01) |
| 25 | 8.44 (18.66) | 0.81 (1.8) |
| 15 (Hi-den) | 3.81 (8.42) | 0.52 (1.14) |
| Standard plating thicknesses | | |
| | <ul style="list-style-type: none"> • gold flash • 0.4µm (15µ") gold • 0.76 µm (30µ") gold | |

DESCRIPTION

Amphenol's G17H dual port connectors are a state of the art design. The front metal shell helps reduce EMI / RFI emissions.

Designed to save PC board space, Amphenol's dual port provides two I / O connectors in a minimal amount of board space.

*Economical
dual port
connectors*

APPLICATIONS




- Industrial
- Telecom
- Any industry standard I / O connections



Amphenol


17H / E13

Shell size dimensions- standard and high density

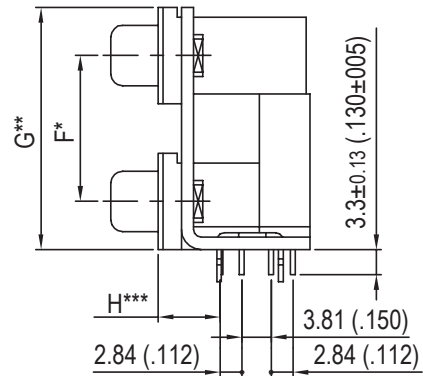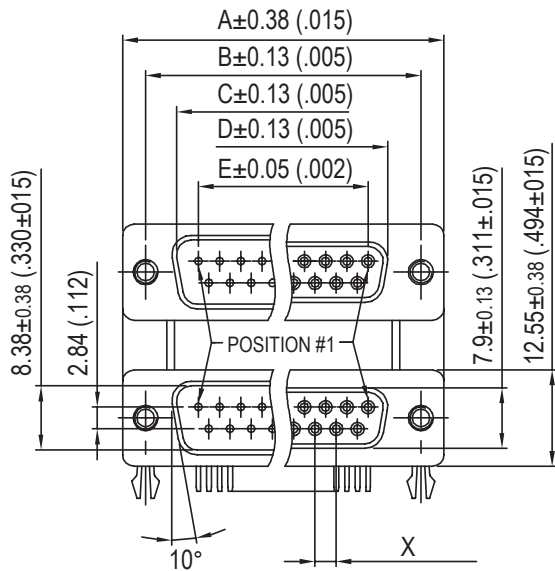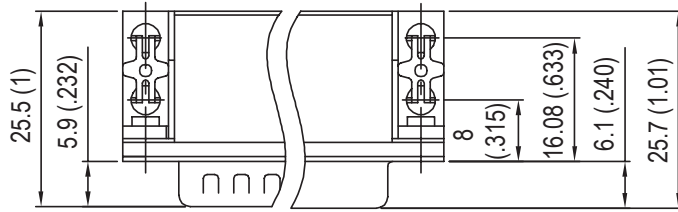

* spacing between ports (see "how to order" for dimensions)
 ** profile distance (see "how to order" for dimensions)
 *** Footprint options (see "how to order" for dimensions)
 H*** Standard Density (SD)
 High Density (HD)
 SD / SD = 8.08mm (.318")
 SD / HD = 5.08mm (.200")
 = 8.89mm (.350")
 HD / HD = 8.89mm (.350")
 = 5.08mm (.200")


Recommended P.C.B. Layout

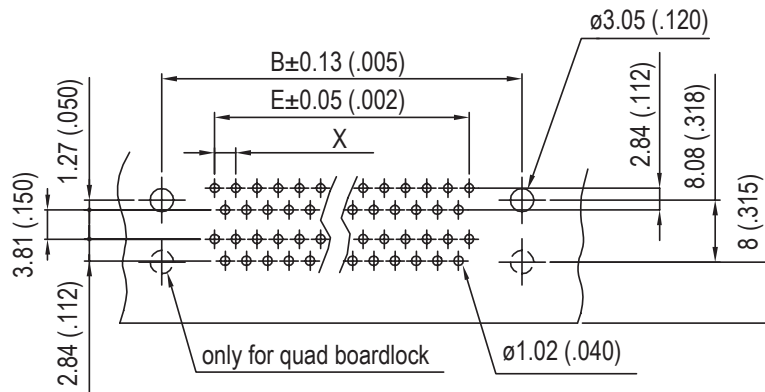

| Shell Size | Nb OF CONTACTS | DIMENSIONS mm (inch) | | | | |
|------------|----------------|----------------------|--------------|--------------|--------------|--------------|
| | | A | B | C PLUG | D SOCKET | E |
| E | 9/HD 15 | 30.84 (1.21) | 24.99 (.984) | 16.92 (.666) | 16.24 (.639) | 11.09 (.437) |
| A | 15/HD 26 | 39.24 (1.54) | 33.32 (1.31) | 24.7 (.972) | 24.56 (.967) | 19.39 (.763) |
| B | 25 | 53.04 (2.09) | 47.04 (1.85) | 38.96 (1.53) | 38.38 (1.51) | 33.24 (1.31) |
| E | 15 (Hi-den) | 30.84 (1.21) | 24.99 (.984) | 16.92 (.666) | 16.24 (.639) | 10.31 (.406) |
| C | 37 | 69.32 (2.73) | 63.50 (2.50) | 55.42 (2.18) | 54.76 (2.16) | 49.86 (1.96) |


Panel mounting option

Flange mounting options:

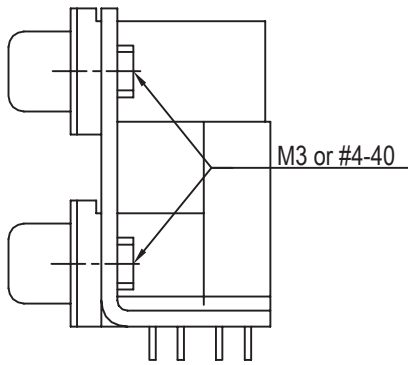


Threaded rear insert

0 / 4

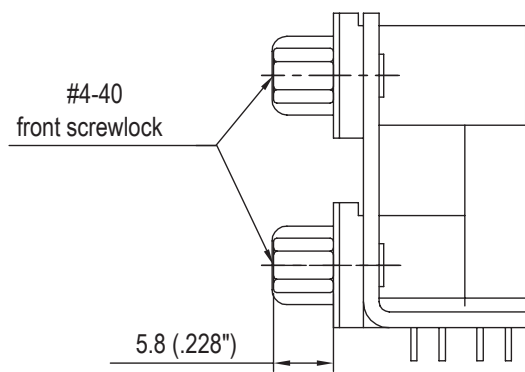

Fixed front female screwlock


7

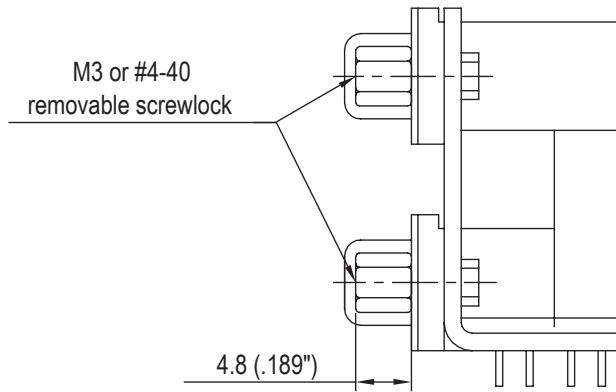

Removable female screwlock


1 / 5

Board mounting options:

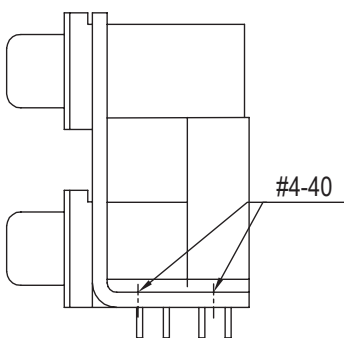


Threaded hole

1

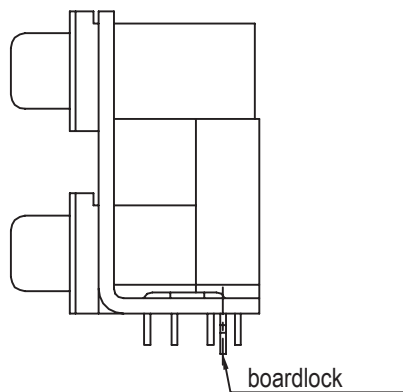

Dual arrowhead boardlock

2

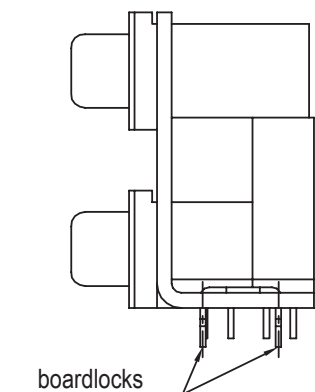

Quad arrowhead boardlock

3

Dual Port Connectors

L17H X X X X X X X X

| Spacing Between Ports | |
|-------------------------|---------------------|
| 1 - F = 15.88mm (.625") | G = 28.42mm (1.12") |
| 2 - F = 19.05mm (.750") | G = 31.60mm (1.24") |
| 3 - F = 22.86mm (.900") | G = 35.41mm (1.39") |
| 4 - SCSI | G = 12.80mm (.504") |
| 7 - F = 20.70mm (.815") | G = 32.20mm (1.26") |

| Top Connector | |
|---------------------------------|--|
| 1 = 9 Pos. Male | |
| 2 = 9 Pos. Female | |
| 3 = 15 Pos. Male | |
| 4 = 15 Pos. Female | |
| 5 = 25 Pos. Male | |
| 6 = 25 Pos. Female | |
| 7 = 15 Pos. High Density Female | |
| 8 = 50 Pos. Female SCSI | |
| 9 = 26 Pos. High Density Female | |
| J = 15 Pos. High Density Male | |
| D = 37 Pos. Male | |
| E = 37 Pos. Female | |
| F = 44 Pos. High Density Male | |
| G = 44 Pos. High Density Female | |
| M = 62 Pos. High Density Male | |
| N = 62 Pos. High Density Female | |
| P = 78 Pos. High Density Male | |
| Q = 78 Pos. High Density Female | |

| Bottom Connector | |
|-----------------------------------|--|
| 1 = 9 Pos. Male | |
| 2 = 9 Pos. Female | |
| 3 = 15 Pos. Male | |
| 4 = 15 Pos. Female | |
| 5 = 25 Pos. Male | |
| 6 = 25 Pos. Female | |
| 7 = 15 Pos. High Density Female | |
| 8 = 50 Pos. Female SCSI | |
| 9 = 26 Pos. High Density Female | |
| K = 15 Pos. High Density Male | |
| D = 37 Pos. Male | |
| E = 37 Pos. Female | |
| F = 44 Pos. High Density Male | |
| G = 44 Pos. High Density Female | |
| M = 62 Pos. High Density Male | |
| N = 62 Pos. High Density Female | |
| P = 78 Pos. High Density Male | |
| Q = 78 Pos. High Density Female | |
| R = 9 Pos. Male + 9 Pos. Male | |
| S = 9 Pos. Female + 9 Pos. Female | |

| Footprint Options | |
|-------------------|-------------------------------|
| SD / SD | BLANK = 8.08mm (.318") |
| SD / HD | BLANK = 5.08mm (.200") |
| 889 | = 8.89mm (.350") |
| HD / HD | BLANK = 8.89mm (.350") |
| 508 | = 5.08mm (.200") |

| Flange Mounting Options | |
|-----------------------------------|--|
| 0 = 4-40unc Rear Insert | |
| 1 = 4-40unc Removable Screwlock | |
| 3 = 3.05mm (.120") Clear Hole | |
| 4 = M3 Rear Insert | |
| 5 = M3 Removable Screwlock | |
| 7 = 4-40unc Fixed Front Screwlock | |

| Board Mounting Options | |
|----------------------------------|--|
| 0 = Triple Arrowhead Boardlock | |
| 1 = 4 * Threaded 4-40unc Inserts | |
| 2 = Dual Arrowhead Boardlocks | |
| 3 = Quad Arrowhead Boardlocks | |
| 4 = 3.18mm (.125") Clear Hole | |

| Shell Plating | |
|-------------------------|--|
| 1 = Bright Tin / Nickel | |
| 2 = Nickel | |

| Contact Plating | |
|------------------------|--|
| 0 = Flash Fold | |
| 1 = 0.4µm (15µ") Gold | |
| 2 = 0.76µm (30µ") Gold | |
| 3 = Full Flash Gold | |
| 4 = 1.27µm (50µ") Gold | |

For special request, please consult factory

Do not hesitate to contact us for further information



Amphenol

Amphenol IT & Communication Products

Block A3/A4, The 4th Industrial District of
Industrial Headquarters, Dong Keng Road
Gong Ming Town, Shen Zhen China
Fax: +86(0)755 2754 9955

Technical Support

Tel: +86(0)755 2717 7945
Info-dsub@amphenol.com.cn
http://www.dsubconnector.com



Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331