


BD239, BD239A, BD239B, BD239C NPN SILICON POWER TRANSISTORS

BOURNS®

- Designed for Complementary Use with the BD240 Series
- 30 W at 25°C Case Temperature
- 2 A Continuous Collector Current
- 4 A Peak Collector Current
- Customer-Specified Selections Available

TO-220 PACKAGE
(TOP VIEW)

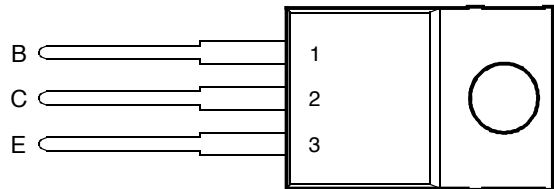

Pin 2 is in electrical contact with the mounting base.

MDTRACA



This series is currently available, but not recommended for new designs.

absolute maximum ratings at 25°C case temperature (unless otherwise noted)

| RATING | | SYMBOL | VALUE | UNIT |
|--|--------|---------------------|-------------|------|
| Collector-emitter voltage ($R_{BE} = 100 \Omega$) | BD239 | V_{CER} | 55 | V |
| | BD239A | | 70 | |
| | BD239B | | 90 | |
| | BD239C | | 115 | |
| Collector-emitter voltage ($I_C = 30 \text{ mA}$) | BD239 | V_{CEO} | 45 | V |
| | BD239A | | 60 | |
| | BD239B | | 80 | |
| | BD239C | | 100 | |
| Emitter-base voltage | | V_{EBO} | 5 | V |
| Continuous collector current | | I_C | 2 | A |
| Peak collector current (see Note 1) | | I_{CM} | 4 | A |
| Continuous base current | | I_B | 0.6 | A |
| Continuous device dissipation at (or below) 25°C case temperature (see Note 2) | | P_{tot} | 30 | W |
| Continuous device dissipation at (or below) 25°C free air temperature (see Note 3) | | P_{tot} | 2 | W |
| Unclamped inductive load energy (see Note 4) | | $\frac{1}{2}LI_C^2$ | 32 | mJ |
| Operating junction temperature range | | T_j | -65 to +150 | °C |
| Storage temperature range | | T_{stg} | -65 to +150 | °C |
| Lead temperature 3.2 mm from case for 10 seconds | | T_L | 250 | °C |

- NOTES: 1. This value applies for $t_p \leq 0.3 \text{ ms}$, duty cycle $\leq 10\%$.
 2. Derate linearly to 150°C case temperature at the rate of 0.24 W/°C.
 3. Derate linearly to 150°C free air temperature at the rate of 16 mW/°C.
 4. This rating is based on the capability of the transistor to operate safely in a circuit of: $L = 20 \text{ mH}$, $I_{B(on)} = 0.4 \text{ A}$, $R_{BE} = 100 \Omega$, $V_{BE(off)} = 0$, $R_S = 0.1 \Omega$, $V_{CC} = 20 \text{ V}$.

PRODUCT INFORMATION

JUNE 1973 - REVISED SEPTEMBER 2002
 Specifications are subject to change without notice.

electrical characteristics at 25°C case temperature

| PARAMETER | TEST CONDITIONS | | | MIN | TYP | MAX | UNIT |
|--|---|--|---------------------|-----|-----|-----|---------------|
| $V_{(BR)CEO}$ Collector-emitter breakdown voltage | $I_C = 30 \text{ mA}$ (see Note 5) | $I_B = 0$ | BD239 | 45 | | | V |
| | | | BD239A | 60 | | | |
| | | | BD239B | 80 | | | |
| | | | BD239C | 100 | | | |
| I_{CES} Collector-emitter cut-off current | $V_{CE} = 55 \text{ V}$ $V_{CE} = 70 \text{ V}$ $V_{CE} = 90 \text{ V}$ $V_{CE} = 115 \text{ V}$ | $V_{BE} = 0$ $V_{BE} = 0$ $V_{BE} = 0$ $V_{BE} = 0$ | BD239 | | | 0.2 | mA |
| | | | BD239A | | | 0.2 | |
| | | | BD239B | | | 0.2 | |
| | | | BD239C | | | 0.2 | |
| I_{CEO} Collector cut-off current | $V_{CE} = 30 \text{ V}$ $V_{CE} = 60 \text{ V}$ | $I_B = 0$ $I_B = 0$ | BD239/239A | | | 0.3 | mA |
| | | | BD239B/239C | | | 0.3 | |
| I_{EBO} Emitter cut-off current | $V_{EB} = 5 \text{ V}$ | $I_C = 0$ | | | | 1 | μA |
| h_{FE} Forward current transfer ratio | $V_{CE} = 4 \text{ V}$ $V_{CE} = 4 \text{ V}$ | $I_C = 0.2 \text{ A}$ $I_C = 1 \text{ A}$ | (see Notes 5 and 6) | 40 | | | |
| | | | | 15 | | | |
| $V_{CE(sat)}$ Collector-emitter saturation voltage | $I_B = 0.2 \text{ A}$ | $I_C = 1 \text{ A}$ | (see Notes 5 and 6) | | | 0.7 | V |
| V_{BE} Base-emitter voltage | $V_{CE} = 4 \text{ V}$ | $I_C = 1 \text{ A}$ | (see Notes 5 and 6) | | | 1.3 | V |
| h_{fe} Small signal forward current transfer ratio | $V_{CE} = 10 \text{ V}$ | $I_C = 0.2 \text{ A}$ | $f = 1 \text{ kHz}$ | 20 | | | |
| $ h_{fe} $ Small signal forward current transfer ratio | $V_{CE} = 10 \text{ V}$ | $I_C = 0.2 \text{ A}$ | $f = 1 \text{ MHz}$ | 3 | | | |

NOTES: 5. These parameters must be measured using pulse techniques, $t_p = 300 \mu\text{s}$, duty cycle $\leq 2\%$.

6. These parameters must be measured using voltage-sensing contacts, separate from the current carrying contacts.

thermal characteristics

| PARAMETER | MIN | TYP | MAX | UNIT |
|---|-----|-----|------|-----------------------------|
| $R_{\theta JC}$ Junction to case thermal resistance | | | 4.17 | $^{\circ}\text{C}/\text{W}$ |
| $R_{\theta JA}$ Junction to free air thermal resistance | | | 62.5 | $^{\circ}\text{C}/\text{W}$ |

resistive-load-switching characteristics at 25°C case temperature

| PARAMETER | TEST CONDITIONS † | | | MIN | TYP | MAX | UNIT |
|-------------------------|--|---|---|-----|-----|-----|---------------|
| t_{on} Turn-on time | $I_C = 200 \text{ mA}$ $V_{BE(off)} = -3.4 \text{ V}$ | $I_{B(on)} = 20 \text{ mA}$ $R_L = 150 \Omega$ | $I_{B(off)} = -20 \text{ mA}$ $t_p = 20 \mu\text{s}$, dc $\leq 2\%$ | | 0.3 | | μs |
| t_{off} Turn-off time | | | | | 0.8 | | μs |

† Voltage and current values shown are nominal; exact values vary slightly with transistor parameters.

TYPICAL CHARACTERISTICS

**TYPICAL DC CURRENT GAIN
VS
COLLECTOR CURRENT**

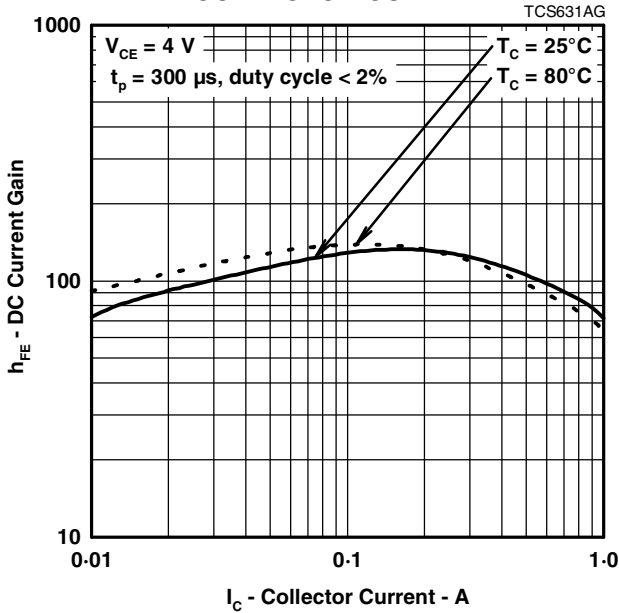


Figure 1.

**COLLECTOR-EMITTER SATURATION VOLTAGE
VS
BASE CURRENT**

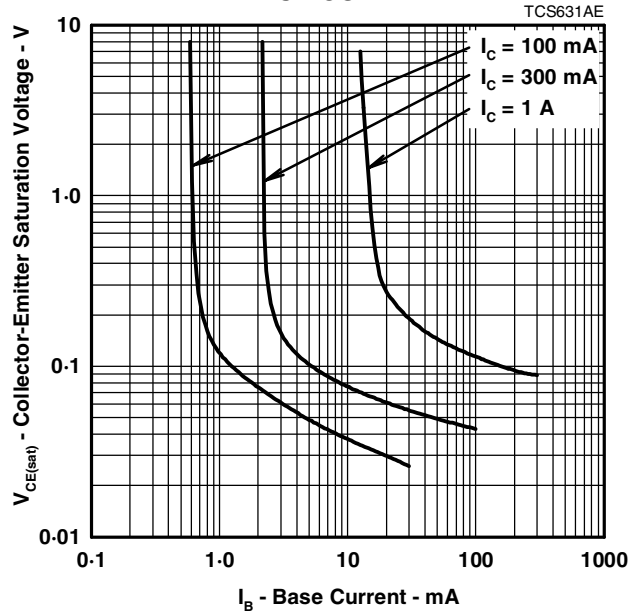


Figure 2.

**BASE-EMITTER VOLTAGE
VS
COLLECTOR CURRENT**

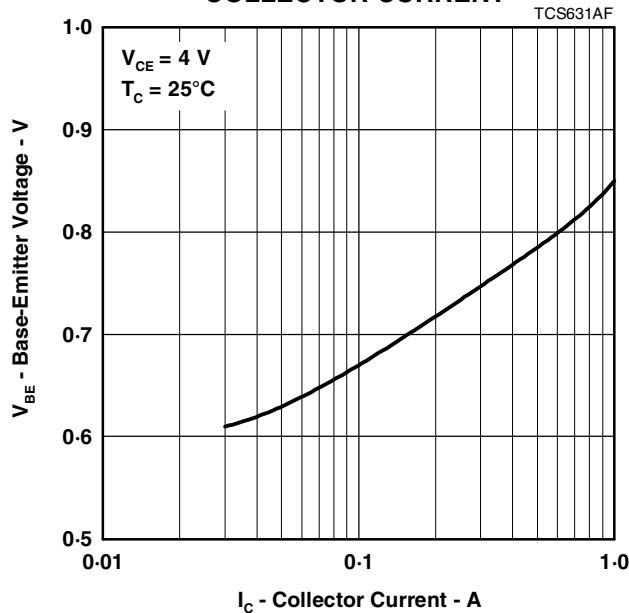


Figure 3.

PRODUCT INFORMATION

MAXIMUM SAFE OPERATING REGIONS

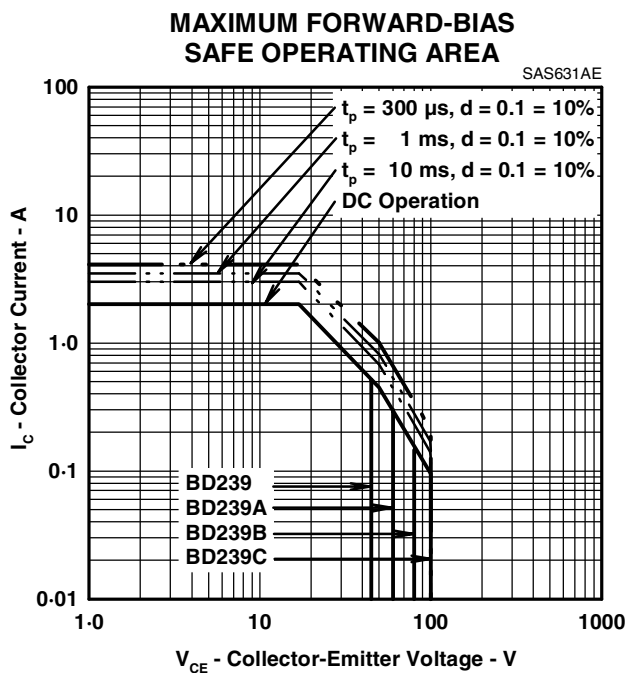


Figure 4.

THERMAL INFORMATION

**MAXIMUM POWER DISSIPATION
vs
CASE TEMPERATURE**

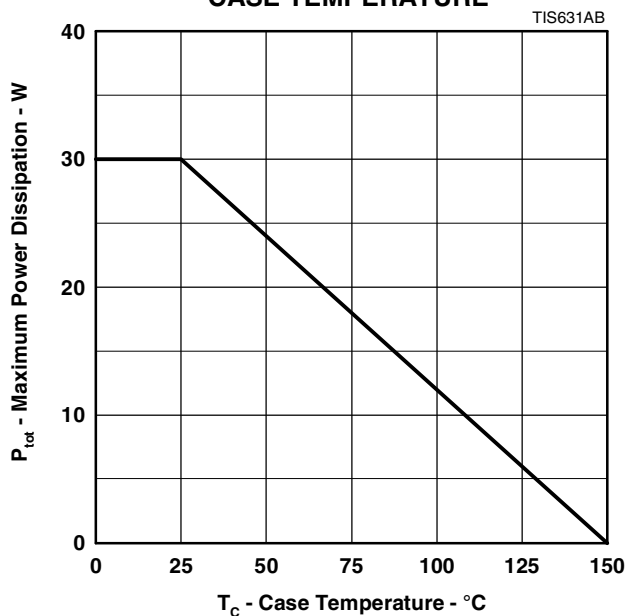


Figure 5.

PRODUCT INFORMATION



Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331