

**Series Number**





DS6630  
DS1137  
DS1145  
DS1351  
DS1976



3003 9th Avenue SW  
PO Box 50  
Watertown, SD 57201  
Toll free: 888-978-2638  
Ph: 605-886-3326  
Fax: 605-886-8995



**Shielded Drum Core Inductors, Tape and Reel Easy Part Numbers: ( Series Number ) - ( Suffix Code )(Tolerance), example DS1137-150M**  
**Bulk Packaging add (-B) to end of Part Numbering Sequence. example DS1137-150M-B**



Parts will be marked with Significant Digit Dots OR Suffix code

Series Number	Maximum Dimensions			Reference Dimensions				
	L	W	H	Y	Z	A	B	C
DS6630	0.260"	0.177"	0.115"	0.170"	0.050"	0.140"	0.055"	0.160"
	[ 6.60 ]	[ 4.50 ]	[ 2.92 ]	[ 4.32 ]	[ 1.27 ]	[ 3.56 ]	[ 1.40 ]	[ 4.06 ]
DS1137	0.421"	0.323"	0.146"	0.236"	0.079"	0.087"	0.094"	0.224"
	[ 10.70 ]	[ 8.20 ]	[ 3.70 ]	[ 6.00 ]	[ 2.00 ]	[ 2.20 ]	[ 2.40 ]	[ 5.70 ]
DS1145	0.421"	0.323"	0.177"	0.236"	0.079"	0.087"	0.094"	0.224"
	[ 10.70 ]	[ 8.20 ]	[ 4.50 ]	[ 6.00 ]	[ 2.00 ]	[ 2.20 ]	[ 2.40 ]	[ 5.70 ]
DS1351	0.510"	0.398"	0.201"	0.300"	0.100"	0.110"	0.118"	0.290"
	[ 12.95 ]	[ 10.10 ]	[ 5.10 ]	[ 7.62 ]	[ 2.54 ]	[ 2.80 ]	[ 3.00 ]	[ 7.37 ]
DS1976	0.730"	0.600"	0.300"	0.500"	0.100"	0.110"	0.115"	0.490"
	[ 18.54 ]	[ 15.25 ]	[ 7.62 ]	[ 12.70 ]	[ 2.54 ]	[ 2.79 ]	[ 2.92 ]	[ 12.45 ]

**Features:**

- High energy storage and low resistance.
- Ideal for DC-DC buck or boost conversion.
- Reliable surface mounting.
- Drop-in replacements for industry prevalent competitor series.
- Robust temperature deflection to prevent damage during solder reflow.
- Tape and Reel mechanical specifications available upon request.
- Operating temperature range -40°C to +85°C.

L <sup>7</sup>	Suffix Codes	DS6630			DS1137				DS1145				DS1351				DS1976						
		DCR <sup>1</sup>	I <sub>MAX</sub> <sup>2-4</sup>	Tolerance	DCR <sup>1</sup>	I <sub>SAT</sub> <sup>3</sup>	I <sub>RMS</sub> <sup>5</sup>	Tolerance	DCR <sup>1</sup>	I <sub>SAT</sub> <sup>3</sup>	I <sub>RMS</sub> <sup>5</sup>	Tolerance	DCR <sup>1</sup>	I <sub>SAT</sub> <sup>3</sup>	I <sub>RMS</sub> <sup>5</sup>	Tolerance	DCR <sup>1</sup>	I <sub>SAT</sub> <sup>3</sup>	I <sub>RMS</sub> <sup>5</sup>	Tolerance			
		W	A	Suffix <sup>6</sup>	W	A	A	Suffix <sup>6</sup>	W	A	A	Suffix <sup>6</sup>	W	A	A	Suffix <sup>6</sup>	W	A	A	Suffix <sup>6</sup>			
1.0	1R0	0.040	3.0	M												0.021	5.80	5.00	M				
1.5	1R5	0.045	2.8	M												0.022	5.20	4.50	M				
2.2	2R2	0.050	1.8	M						0.040	2.50	2.50	M	0.032	5.00	3.80	M						
3.3	3R3	0.055	1.6	M											0.039	3.90	3.30	M					
3.9	3R9									0.055	2.10	2.10	M										
4.7	4R7	0.060	1.4	M											0.054	2.80	2.70	M					
5.0	5R0				0.080	1.70	1.70	M															
5.6	5R6									0.065	1.95	1.95	M										
6.8	6R8	0.065	1.2	M											0.075	2.80	2.20	M					
7.5	7R5				0.100	1.40	1.40	M															
8.2	8R2									0.080	1.75	1.75	M										
10	100	0.075	1.0	M	0.165	1.20	1.20	M	0.100	1.50	1.50	M	0.101	2.40	2.00	M	0.040	7.00	3.60	M			
12	120	0.172	1.10	M	0.172	1.10	1.10	M	0.120	1.40	1.40	M											
15	150	0.090	0.80	M	0.181	1.00	1.00	M	0.140	1.30	1.30	M	0.150	2.00	1.50	M	0.048	5.60	3.20	M			
18	180	0.190	0.90	M	0.190	0.90	0.90	M	0.160	1.20	1.20	M											
22	220	0.110	0.70	M	0.250	0.80	0.80	M	0.180	1.10	1.10	M	0.207	1.50	1.30	M	0.059	5.00	2.80	M			
27	270	0.270	0.70	M	0.270	0.70	0.70	M	0.200	1.00	1.00	M											
33	330	0.190	0.60	M	0.300	0.65	0.65	M	0.240	0.92	0.92	M	0.334	1.40	1.10	M	0.075	4.50	2.60	M			
39	390	0.380	0.60	M	0.380	0.60	0.60	M	0.350	0.84	0.84	M											
47	470	0.230	0.50	M	0.580	0.55	0.55	M	0.425	0.75	0.75	M	0.472	1.00	0.80	M	0.097	4.00	2.40	M			
56	560	0.620	0.50	M	0.620	0.50	0.50	M	0.530	0.68	0.68	M											
68	680	0.290	0.40	M	0.920	0.45	0.45	M	0.668	0.60	0.60	M								0.138	3.00	2.00	M
82	820	0.980	0.40	M	0.980	0.40	0.40	M	0.730	0.54	0.54	M											
100	101	0.480	0.3	M					1.050	0.50	0.50	M								0.207	2.40	1.70	M
120	121	1.120	0.45	M					1.120	0.45	0.45	M											
150	151	0.590	0.26	M																0.293	2.10	1.30	M
180	181																						
220	221	0.770	0.22	M																0.470	1.90	1.10	M
270	271																						
330	331	1.40	0.2	M																0.780	1.10	0.86	M
390	391																						
470	471	1.80	0.19	M																1.080	1.10	0.73	M
680	681	2.20	0.18	M																1.400	0.96	0.64	M
1000	102	3.40	0.15	M																2.010	0.80	0.53	M
1500	152	4.20	0.12	M																			
2200	222	8.50	0.10	M																			
3300	332	11.00	0.08	M																			
4700	472	25.20	0.06	M																			
6800	682	30.80	0.04	M																			
10000	103	39.60	0.02	M																			

1) DCRs (DC resistances) are maximums @20°C.

2) Total current rating (IDC + IAC)

3) DC (Direct Current) current applied to produce a typical 10% drop in nominal inductance.


4) DC (Direct Current) current applied to produce a typical 30°C temperature rise.

5) DC (Direct Current) current applied to produce a typical 40°C temperature rise.

6) Suffix of M = ±20%

7) Inductance measured at 100kHz and 100mV

Specifications subject to change without notice

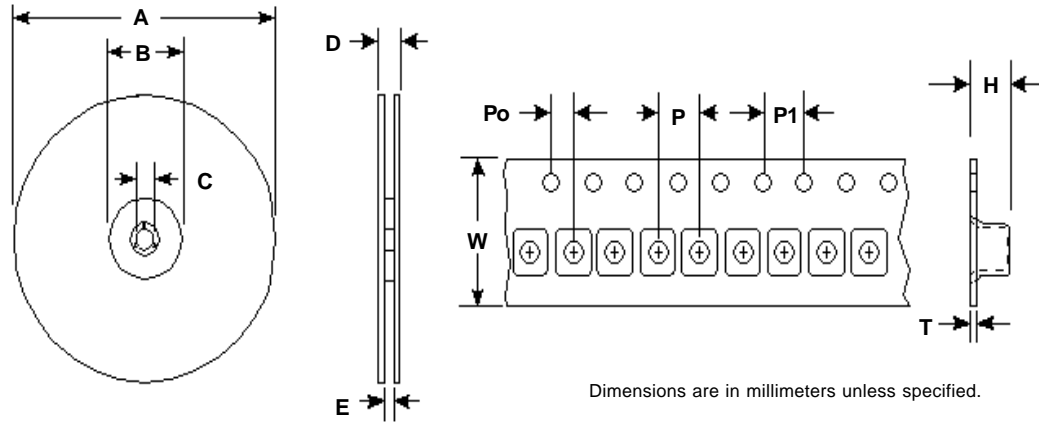

Dimensions are in millimeters unless specified.

Series Number	Tape and Reel dimensions (mm)											Reel Quantity	Packaging Specification
	A MAX	B MIN	C ± 0.5	D MAX	E MAX	W ± 0.3	P ± 0.1	P0 ± 0.1	P1 ± 0.1	H ± 0.05	T ± 0.05		
DS6630	360.0	100.0	13.0	22.4	19.4	16.0	8.0	2.0	4.0	3.5	0.35	2500	90-0057
DS1137	360.0	100.0	13.0	30.4	27.4	24.0	12.0	2.0	4.0	3.8	0.35	1000	90-0062
DS1145	360.0	100.0	13.0	30.4	27.4	24.0	12.0	2.0	4.0	4.6	0.35	1000	90-0063
DS1351	360.0	100.0	13.0	30.4	27.4	24.0	16.0	2.0	4.0	5.7	0.35	750	90-0055
DS1976	360.0	100.0	13.0	50.4	47.4	44.0	24.0	2.0	4.0	6.9	0.35	250	90-0065

PACKAGING NOTE: Only pressure sensitive cover tape is to be used.

**Customer Packaging Specifications**  
For Print Distribution to Customers

Series	Revision
<b>DS SERIES</b>	<b>B</b>
Sheet 2 of 3	

Item	Specification	Test Method/Condition
<b>Environmental</b>		
Static Humidity	After exposure part remains within specified electrical parameters for L, Q and DCR.	Expose parts to an environment of +50°C with 90 to 95% R.H. for 100 hours. After exposure, allow parts to dry for 2 hours before measurements are taken.
Storage Life	After exposure part remains within specified electrical parameters for L, Q and DCR.	Subject parts to an environment of +50°C 90 to 100% R.H. for 46 to 50 hours. After exposure, allow parts to dry for 2 hours before measurements are taken.
Moisture Resistance	After exposure, part shall not have a shorted or open winding.	Per MIL-STD 202 Method 106, ten 24 hour cycles at +25°C to +65°C at 80 to 95% R.H. During any of the first 9 cycles, inductors are revolved from the chamber and exposed to -10°C for 3 hours. Allow parts to dry for 2 hours before measurements are taken.
Temperature Cycle	After exposure part remains within specified electrical parameters for L, Q and DCR.	10 cycles (Air to Air) 1 cycle shall consist of: 30 minutes exposure to +85°C 30 minutes exposure to -40°C Allow 20 minutes transition between extremes.
Temperature Shock	After exposure part remains within specified electrical parameters for L, Q and DCR.	10 cycles (Air to Air) 1 cycle shall consist of: 30 minutes exposure to -45°C 30 minutes exposure to +125°C 15 seconds maximum transition between temperatures
<b>General</b>		
Storage Temperature Range	-40°C to +85°C	
Operating Temperature Range	-40°C to +85°C	
Flammability	IEC 695-2-2	Withstands needle-flame test
<b>Other</b>		
Vibration	After exposure part remains within specified electrical parameters for L, Q and DCR.	Inductors shall be randomly vibrated per NAVMAT P9492 profile. Samples shall be subjected to 0.04G/Hz for a minimum of 15 minutes per axis, for each of the three axes.
Mechanical Shock	After exposure part remains within specified electrical parameters for L, Q and DCR.	Test per MIL-STD 202 method 213 test condition A, test mounted samples 3 axes, 6 times, totaling 18 shocks. (50Gs, 11ms, half-sine).
Solderability	Wetting shall cover 90% minimum of each termination	Dip pads in RMA flux, 63/37 solder (Sn/Pb) at 232°C for 5 seconds ±2 seconds.
Component Adhesion (Push Test)	4 pounds	Apply and measure force with a digital force gauge set.
Resistance to Solvent	No sign of degradation in appearance or marking detail.	Withstands 6 minutes of alcohol. Withstands 3 minutes forced spray Freon TMS
Load Life	After exposure, part shall not have a shorted or open winding.	Parts to be stored at 110°C for 1000 hours with rated current applied. Parts to be tested at: start, 500 and 1000 hours. Allow 2 hours at room temperature before testing.

**For Print Distribution to Customers**

**Series**

**DS SERIES**

**Revision**

**B**

**Sheet 3 of 3**



## Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

### Наши контакты:

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331