Glenair Eye-Beam™ Expanded Beam Fiber Optic Connection System

Eye-Beam™ Expanded Beam fiber optic termini integrated into ruggedized reverse-bayonet power connectors

- **All the benefits of an expanded beam connection system built into a versatile F/O terminus**
- **Factory-terminated F/O Eye-Beam™ termini easily integrated into any connector package**
- **Innovative expanded beam lens terminus expands signal 27X from a standard 9.3 micron fiber core**
- **Revolutionary design delivers low dB loss (1.5 dB multimode, 2.0 dB singlemode untuned) performance while reducing maintenance, inspection and test costs**
- **Ultra-high precision ceramic sleeves and custom designed terminus bodies ensure axial alignment**

Innovative expanded beam termini deliver optimal performance in harsh environments

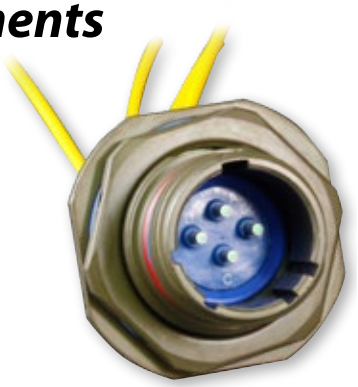

RoHS-Compliant Versions Available

Eye-Beam™ Expanded Beam fiber optic termini can be integrated into virtually any circular or rectangular connector package. Factory terminated lens pin termini and lens socket termini on cable jumpers allow for easy fusion splicing in the field.

Comparison of standard butt-joint fiber optic terminus to Eye-Beam™ expanded beam fiber optic terminus

Butt-Joint Fiber Optic Terminus

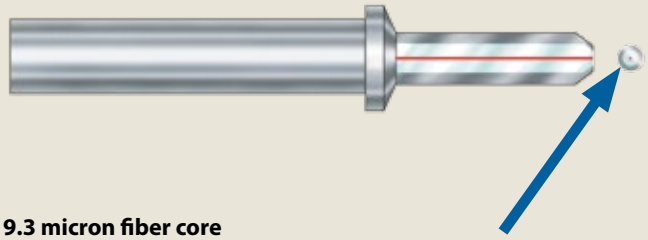

9.3 micron fiber core
Fiber surfaces exposed and susceptible to damage
Must be cleaned prior to mating

Eye-Beam™ Expanded Beam Fiber Optic Terminus

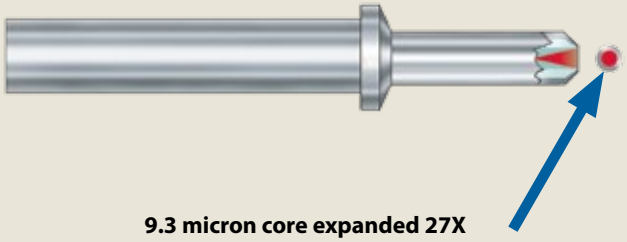

9.3 micron core expanded 27X
Fiber surfaces protected from contamination
Lens surface easy to clean

© 2012 Glenair, Inc.

How To Order factory terminated Eye-Beam™ jumpers

1. Eye-Beam™ system part numbers begin with the FA1000 Basic Part Number
2. Select fiber size (Consult factory for additional options)
3. Select operating wavelength
4. Select jumper cable configuration. Jumpers are supplied standard with 36 inches of fiber cable. Specific lengths available in part number breakdown as shown below.

Basic Part Number

Operating Wavelength
85 = 850nm
13 = 1300/1310nm
15 = 1550nm

End B
(See Table II)

Temperature Rating:
A = -40°C to +85°C
B = -55°C to +125°C
C = Customer Specified*

FA1000 - 50 - 85 A 1 - XXXX A

Fiber Size
09 = 9.3/125 Singlemode
50 = 50/125 Multimode
62 = 62.5/125 Multimode

End A
(See Table I)

Length in Inches
(Omit for Standard 36 Inches)
Ex: -0040 = 40 inches

Table I: Eye-Beam™ Termini

Designator	Description	Connector Series
A	M29504/04 Style Pin (181-070)	MIL-DTL-38999 Series III
	Mighty Mouse Size 16 Pin (181-070)	Series 80 Mighty Mouse
B	M29504/05 Style Socket, Springless (181-077)	MIL-DTL-38999 Series III
C	M29504/14 Style Pin (181-095)	MIL-PRF-28876
D	M29504/15 Style Socket (181-096)	MIL-PRF-28876
F	Mighty Mouse Size 16 Socket (181-083)	Series 80 Mighty Mouse
G	GFR Pin (181-082)	Glenair GFR System
H	GFR Socket (181-081)	Glenair GFR System
J	GFOCA Termini (181-067)	GFOCA (hermaphroditic)

Table II: Eye-Beam™ Termini and Commercial Connectors

A	M29504/04 Style Pin (181-070)
	Mighty Mouse Size 16 Pin (181-070)
B	M29504/05 Style Socket, Springless (181-077)
C	M29504/14 Style Pin (181-095)
D	M29504/15 Style Socket (181-096)
F	Mighty Mouse Size 16 Socket (181-083)
G	GFR Pin (181-082)
H	GFR Socket (181-081)
J	GFOCA Termini (181-067)
1	LC Connector
2	LC APC Connector
3	FC Connector
4	FC APC Connector
5	ST Connector
6	SC Connector
7	SMA 905 Connector
8	SMA 906 Connector
9	Customer Specified*

Standard Tolerance for Cable Jumpers

Length	Tolerance
5 in, up to 2 ft	+1/-0 in
Over 2 ft, up to 10 ft	+3/-0 in
Over 10 ft, up to 50 ft	+6/-0 in
Over 50 ft, up to 100 ft	+1/-0 ft
Over 100 ft	+2/-0 ft

Notes

Optical performance: Insertion loss to be less than 2.0 dB when measured at 1310 nm or 1550 nm wavelength for singlemode, or when measured at 850 nm or 1300 nm for multimode. For customer-specific requirements, Glenair will assign a unique part number for the cable assembly

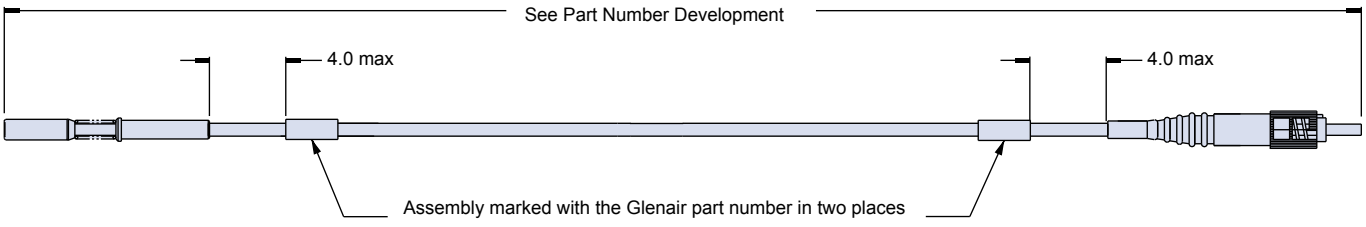

© 2012 Glenair, Inc. U.S. CAGE Code 06324 Printed in U.S.A.

Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331