

# **P993**

## **Low Range Differential Pressure PCB Mount Sensor**



### **Typical Applications**

- Variable Air Volume Systems (VAV)
- Filter Pressure Monitoring
- Duct Air Flow
- Modulated Furnace Controls
- Combustion Air Flow
- Gaseous Leak Detection

### **Standard Full Scale Pressure Ranges**

1, 2, 5, 10,  $\pm 1$ ,  $\pm 2$ , and  $\pm 5$  inches of H<sub>2</sub>O

### **Features**

- Rugged PCB Mount Package
- Amplified Temperature Compensated Linear Output
- No Position Sensitivity
- EMI/RFI & ESD Protected
- Superior Output Signal Stability

### **Description**

The P993 series of pressure sensors incorporates a silicon capacitive sensing element in a compact package.

Using a 5 Vdc input, the sensors provide a 0.25 to 4.0 Vdc output proportional to pressure. Internal temperature compensation provides an accurate, easy to use device.

The innovative design eliminates mounting position effects found on other low pressure differential sensors currently available in the market.

## Technical Specifications

Note: Performance Specifications with 5 Vdc supply at 25°C

### Differential Pressure Ranges

(inches of H<sub>2</sub>O): 1, 2, 5, 10, ±1, ±2, and ±5

Proof Pressure: 1.0 PSI (either port)

Burst Pressure: 1.5 PSI (either port)

Supply Voltage: 5.0 ± 0.25 Vdc

Supply Current: 4mA Max.

Output Voltage (Ratiometric): 0.25 to 4.0 Vdc

### Calibration Tolerance

(at 5.0 Vdc supply and no load):

Zero/Null Pressure: 0.25 Vdc ± 60 mV

Span: 3.75 Vdc ± 60 mV

Voltage Ratiometricity: ±1.5% of span Max.

4.75 to 5.25 Vdc supply

### Total Error Band

(10° to 40°C): ±2% of span Max. (±3% for 0-1" range)

Output Impedance: 100 Ω Max.

Service Life: 10,000,000 cycles Min.

Shock: 10 g's at 6ms duration

Vibration: 1 g from 20 Hz to 1200 Hz

Operating Temperature: 0°C to 60°C

Storage Temperature: -40°C to +95°C

Humidity: 95% RH, non-condensing

Weight: 20 grams Max.

Electrical Termination: 3 solderable pins, tin plated

Preferred Mounting Position: None

Pressure Connection: 1/8" diameter tube fitting with barb for 3/16 ID tubing

### Recommended Interface

Impedance: 25 kΩ Min. resistance between transducer output and ground, in parallel with 0.2 uF Max. capacitance

Over-Voltage Protection: 16 Vdc

Reverse Polarity Protection: -6 Vdc



Before installation and operation, ensure that the appropriate pressure sensor has been selected in terms of pressure range, design and specific measuring conditions. Non-compliance can result in serious injury and/or damage to the equipment.

Warning: The product information contained in this catalogue is given purely as information and does not constitute a representation, warranty or any form of contractual commitment. Kavlico reserve the right to modify their products without notice. It is imperative that we should be consulted over any particular use or application of our products and it is the responsibility of the buyer to establish, particularly through all the appropriate tests, that the product is suitable for the use or application. Under no circumstances will our warranty apply, nor shall we be held responsible for any application (such as any modification, addition, deletion, use in conjunction with other electrical or electronic components, circuits or assemblies, or any other unsuitable material or substance) which has not been expressly agreed by us prior to the sale of our products.

© 2013 Kavlico. All rights reserved.

## How to Order

Use this diagram, working top to bottom and left to right to construct your model number. An example is shown below. Custom OEM options are also available.

### P993 Low Range Differential Pressure PCB Mount Sensor



#### Pressure Range

1	0 - 1.0" H <sub>2</sub> O
1B	±1" H <sub>2</sub> O
2	0 - 2.0" H <sub>2</sub> O
2B	±2" H <sub>2</sub> O
5	0 - 5.0" H <sub>2</sub> O
5B	±5" H <sub>2</sub> O
10	0 - 10" H <sub>2</sub> O

P993 - 5B

Example: P993 - 5B

Description: P993 Pressure Sensor, ±5" H<sub>2</sub>O

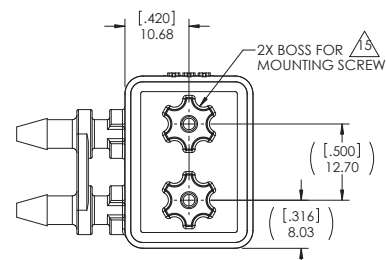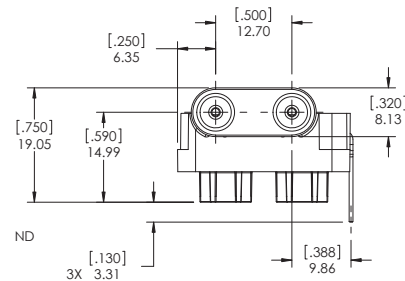

Dimensions in: mm [inches]

**Don't see what you want?**

Call us at +1 (619) 710-2068 to customize this product to meet your application-specific needs!



## Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

### Наши контакты:

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331