PDTA143/114/124/144EQA series

50 V, 100 mA PNP resistor-equipped transistors

Rev. 1 — 18 December 2015 Product data sheet

1. Product profile

1.1 General description

100 mA PNP Resistor-Equipped Transistor (RET) family in a leadless ultra small DFN1010D-3 (SOT1215) Surface-Mounted Device (SMD) plastic package with visible and solderable side pads.

Table 1. Product overview

Type number	R1	R2	Nexperia	NPN complement
PDTA143EQA	4.7 kΩ	4.7 kΩ	DFN1010D-3 (SOT1215)	PDTC143EQA
PDTA114EQA	10 kΩ	10 kΩ		PDTC114EQA
PDTA124EQA	22 kΩ	22 kΩ		PDTC124EQA
PDTA144EQA	47 kΩ	47 kΩ		PDTC144EQA

1.2 Features and benefits

- 100 mA output current capability
- built-in bias resistors
- simplifies circuit design
- reduces component count
- reduced pick and place costs
- low package height of 0.37 mm
- AEC-Q101 qualified
- suitable for Automatic Optical Inspection (AOI) of solder joint

1.3 Applications

- digital applications
- cost saving alternative for BC847/BC857 series in digital applications
- controlling IC inputs
- switching loads

1.4 Quick reference data

Table 2. Quick reference data

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_{CEO}	collector-emitter voltage	open base	-	-	–50	V
I_O	output current		-	-	–100	mA

2. Pinning information

Table 3. Pinning

Pin	Symbol	Description	Simplified outline	Graphic symbol
1	I	input (base)	 Transparent top view	 aaa-019606
2	GND	GND (emitter)		
3	O	output (collector)		
4	O	output (collector)		

3. Ordering information

Table 4. Ordering information

Type number	Package		
	Name	Description	Version
PDTA143EQA	DFN1010D-3	plastic thermal enhanced ultra thin small outline package; no leads; 3 terminals; body: 1.1 × 1.0 × 0.37 mm	SOT1215
PDTA114EQA			
PDTA124EQA			
PDTA144EQA			

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved

4. Marking

Table 5. Marking codes

Type number	Marking code
PDTA143EQA	10 10 11
PDTA114EQA	11 01 11
PDTA124EQA	10 11 10
PDTA144EQA	10 01 11

4.1 Binary marking code description

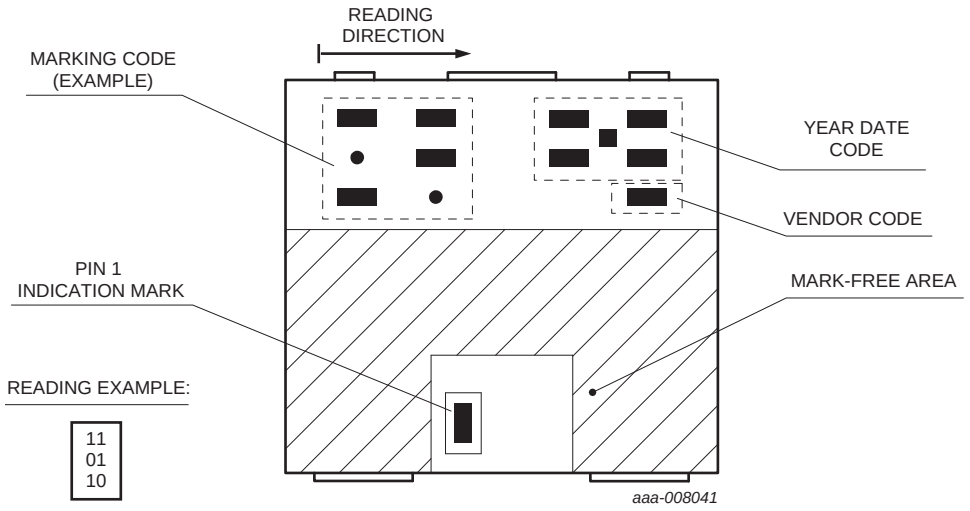

Fig 1. SOT1215 binary marking code description

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2017. All rights reserved

5. Limiting values

Table 6. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions		Min	Max	Unit
V_{CBO}	collector-base voltage	open emitter		-	–50	V
V_{CEO}	collector-emitter voltage	open base		-	–50	V
V_{EBO}	emitter-base voltage	open collector		-	–10	V
V_I	input voltage					
	PDTA143EQA			–30	+10	V
	PDTA114EQA			–40	+10	V
	PDTA124EQA			–40	+10	V
	PDTA144EQA			–40	+10	V
I_O	output current			-	–100	mA
P_{tot}	total power dissipation	$T_{amb} \leq 25$ °C	[1]	-	280	mW
			[2]	-	440	mW
T_j	junction temperature			-	150	°C
T_{amb}	ambient temperature			–55	+150	°C
T_{stg}	storage temperature			–65	+150	°C

[1] Device mounted on an FR4 Printed-Circuit Board (PCB), single-sided copper, tin-plated and standard footprint.

[2] Device mounted on an FR4 PCB, 4-layer copper, tin-plated and standard footprint.

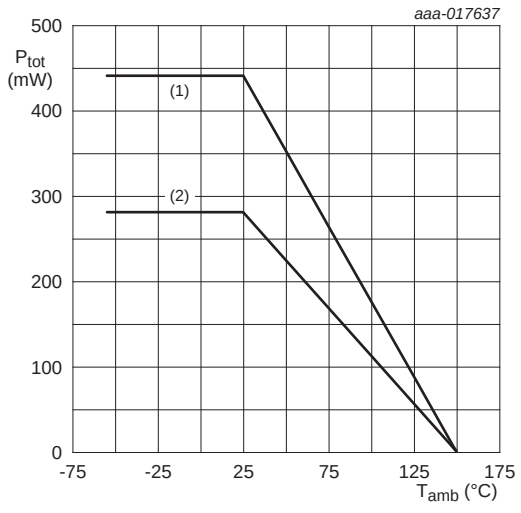

(1) FR4 PCB, 4-layer copper, standard footprint

(2) FR4 PCB, standard footprint

Fig 2. Power derating curves

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved

6. Thermal characteristics

Table 7. Thermal characteristics

Symbol	Parameter	Conditions		Min	Typ	Max	Unit
$R_{th(j-a)}$	thermal resistance from junction to ambient	in free air	[1]	-	-	446	K/W
			[2]	-	-	284	K/W

[1] Device mounted on an FR4 PCB, single-sided copper, tin-plated and standard footprint.

[2] Device mounted on an FR4 PCB, 4-layer copper, tin-plated and standard footprint.

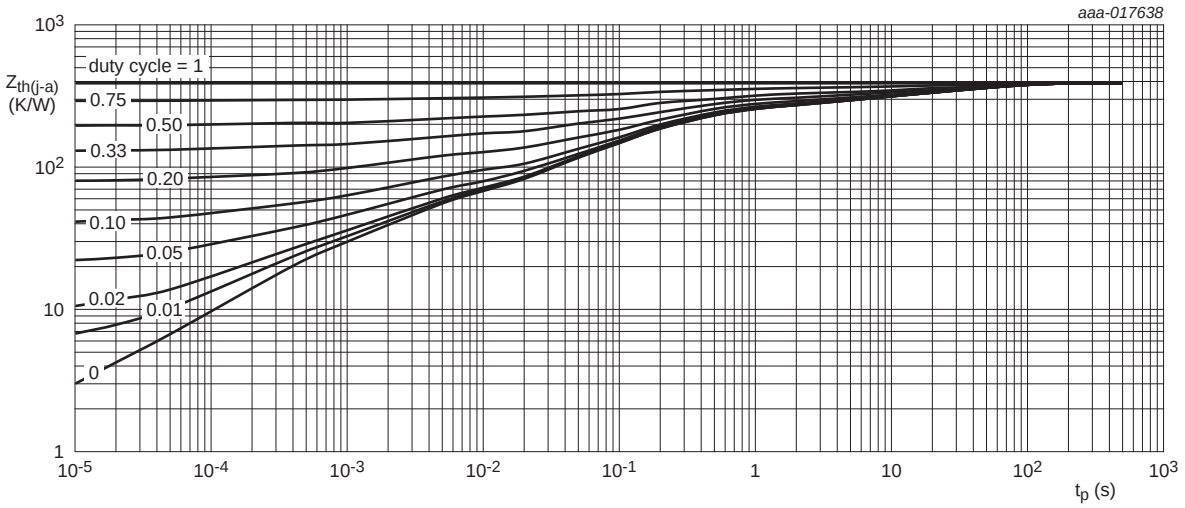

FR4 PCB, single-sided copper, tin-plated and standard footprint

Fig 3. Transient thermal impedance from junction to ambient as a function of pulse duration; typical values

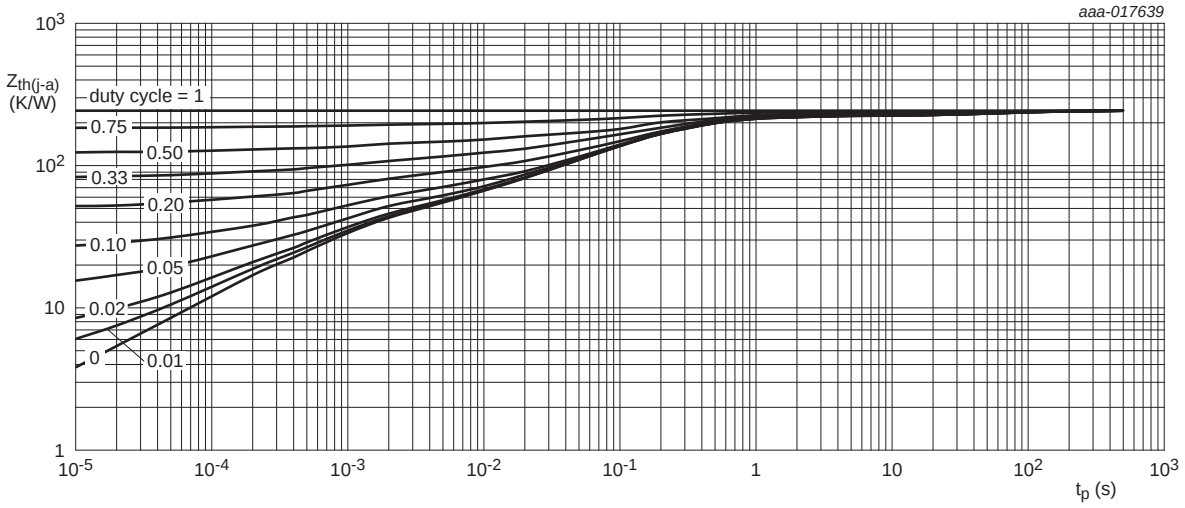

FR4 PCB, 4-layer copper, tin-plated and standard footprint.

Fig 4. Transient thermal impedance from junction to ambient as a function of pulse duration; typical values

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2017. All rights reserved

7. Characteristics

Table 8. Characteristics

T_{amb} = 25 °C unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
I_{CBO}	collector-base cut-off current	V_{CB} = -50 V; I_E = 0 A	-	-	-100	nA
I_{CEO}	collector-emitter cut off current	V_{CE} = -30; I_B = 0 A;	-	-	-1	µA
		V_{CE} = -30; I_B = 0 A; T_j = 150 °C	-	-	-5	µA
I_{EBO}	emitter-base cut-off current					
	PDTA143EQA	V_{EB} = -5 V; I_C = 0 A	-	-	-900	µA
	PDTA114EQA		-	-	-400	µA
	PDTA124EQA		-	-	-180	µA
	PDTA144EQA		-	-	-90	µA
h_{FE}	DC current gain					
	PDTA143EQA	V_{CE} = -5 V; I_C = -10 mA	30	-	-	
	PDTA114EQA	V_{CE} = -5 V; I_C = -5 mA	30	-	-	
	PDTA124EQA	V_{CE} = -5 V; I_C = -5 mA	60	-	-	
	PDTA144EQA	V_{CE} = -5 V; I_C = -5 mA	80	-	-	
V_{CEsat}	collector-emitter saturation voltage	I_C = -10 mA; I_B = -0.5 mA	-	-	-150	mV
$V_{I(off)}$	off-state input voltage					
	PDTA143EQA	V_{CE} = -5 V; I_C = -100 µA	-	-1.1	-0.5	V
	PDTA114EQA		-	-1.1	-0.8	V
	PDTA124EQA		-	-1.1	-0.8	V
	PDTA144EQA		-	-1.2	-0.8	V
$V_{I(on)}$	on-state input voltage					
	PDTA143EQA	V_{CE} = -0.3 V; I_C = -20 mA	-2.5	-1.9	-	V
	PDTA114EQA	V_{CE} = -0.3 V; I_C = -10 mA	-2.5	-1.8	-	V
	PDTA124EQA	V_{CE} = -0.3 V; I_C = -5 mA	-2.5	-1.7	-	V
	PDTA144EQA	V_{CE} = -0.3 V; I_C = -2 mA	-3	-1.6	-	V
R1	bias resistor 1 (input)	[1]				
	PDTA143EQA		3.3	4.7	6.1	kΩ
	PDTA114EQA		7	10	13	kΩ
	PDTA124EQA		15.4	22	28.6	kΩ
	PDTA144EQA		33	47	61	kΩ
R2/R1	bias resistor ratio	[1]	0.8	1	1.2	
C_c	collector capacitance	V_{CB} = -10 V; I_E = i_e = 0 A; f = 1 MHz	-	-	3	pF
f_T	transition frequency	V_{CE} = -5 V; I_C = -10 mA; f = 100 MHz [2]	-	180	-	MHz

[1] See section test information for resistor calculation and test conditions.

[2] Characteristics of built-in transistor.

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved

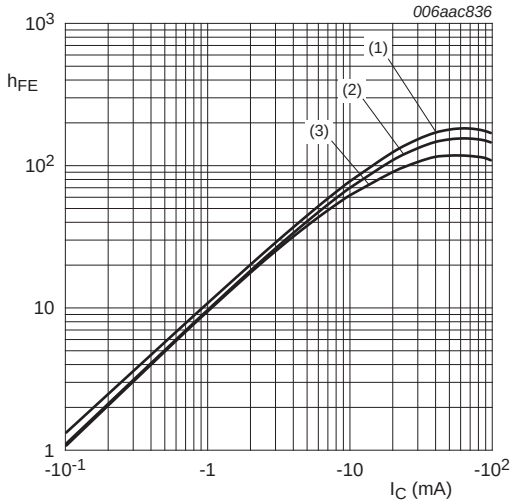

V_{CE} = −5 V

(1) T_{amb} = 100 °C

(2) T_{amb} = 25 °C

(3) T_{amb} = −40 °C

Fig 5. PDTA143EQA: DC current gain as a function of collector current; typical values

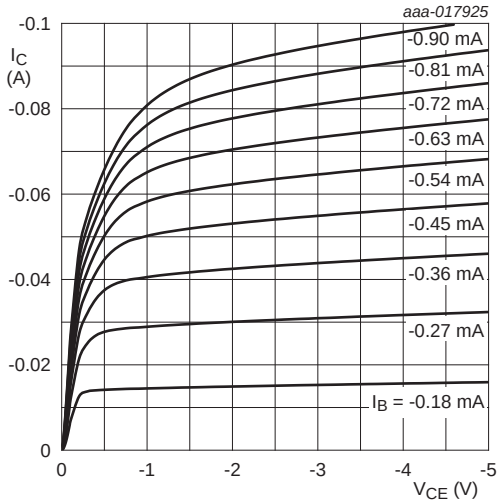

T_{amb} = 25 °C

Fig 6. PDTA143EQA: Collector current as a function of collector-emitter voltage; typical values

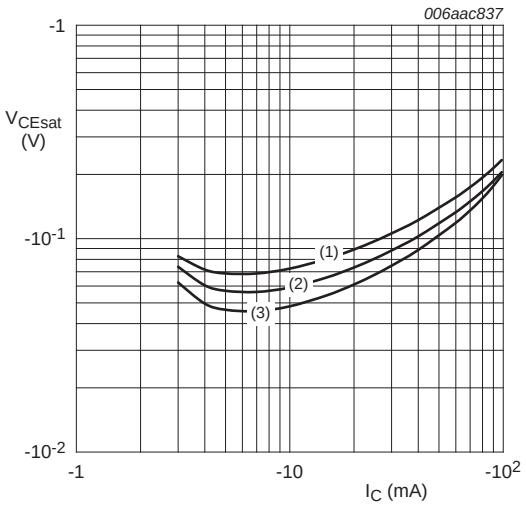

I_C/I_B = 20

(1) T_{amb} = 100 °C

(2) T_{amb} = 25 °C

(3) T_{amb} = −40 °C

Fig 7. PDTA143EQA: Collector-emitter saturation voltage as a function of collector current; typical values

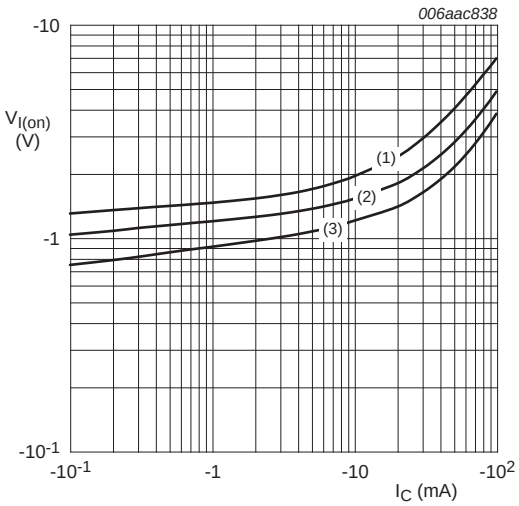

V_{CE} = −0.3 V

(1) T_{amb} = −40 °C

(2) T_{amb} = 25 °C

(3) T_{amb} = 100 °C

Fig 8. PDTA143EQA: On-state input voltage as a function of collector current; typical values

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved

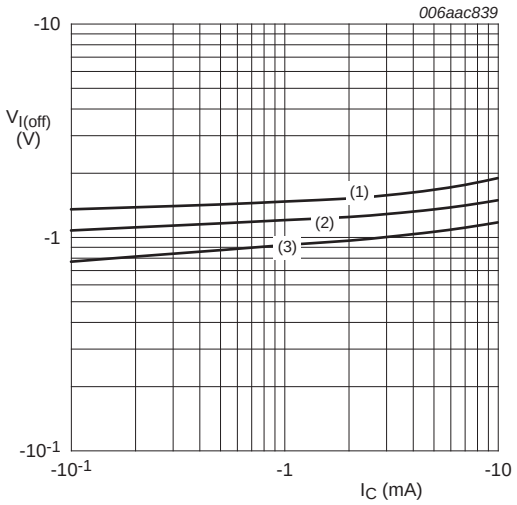

V_{CE} = −5 V

(1) T_{amb} = −40 °C

(2) T_{amb} = 25 °C

(3) T_{amb} = 100 °C

Fig 9. PDTA143EQA: Off-state input voltage as a function of collector current; typical values

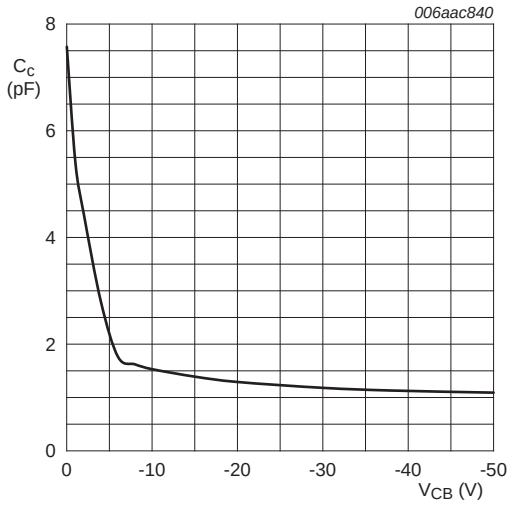

f = 1 MHz; T_{amb} = 25 °C

Fig 10. PDTA143EQA: Collector capacitance as a function of collector-base voltage; typical values

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved

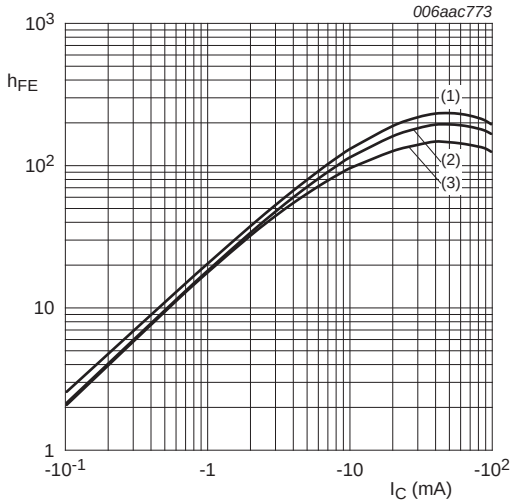

V_{CE} = –5 V

(1) T_{amb} = 100 °C

(2) T_{amb} = 25 °C

(3) T_{amb} = –40 °C

Fig 11. PDTA114EQA: DC current gain as a function of collector current; typical values

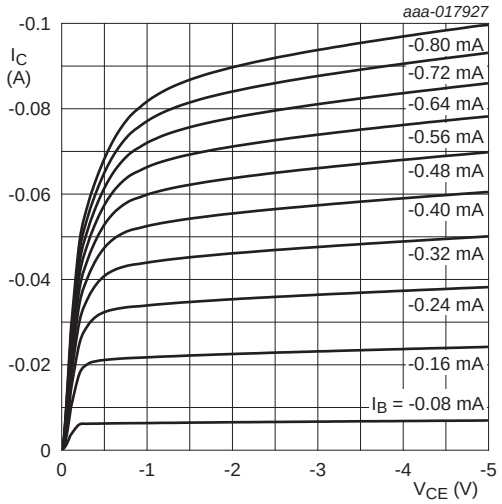

T_{amb} = 25 °C

Fig 12. PDTA114EQA: Collector current as a function of collector-emitter voltage; typical values

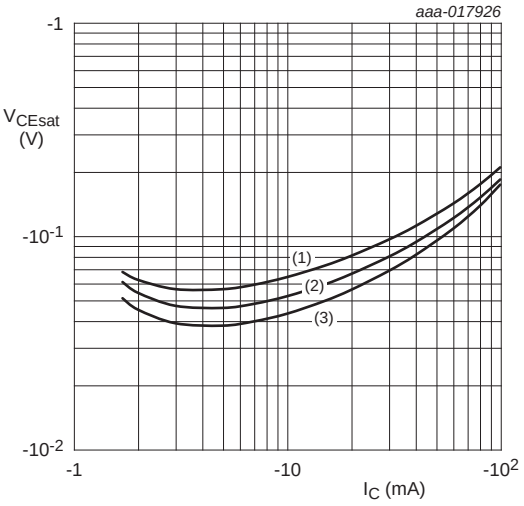

I_C/I_B = 20

(1) T_{amb} = 100 °C

(2) T_{amb} = 25 °C

(3) T_{amb} = –40 °C

Fig 13. PDTA114EQA: Collector-emitter saturation voltage as a function of collector current; typical values

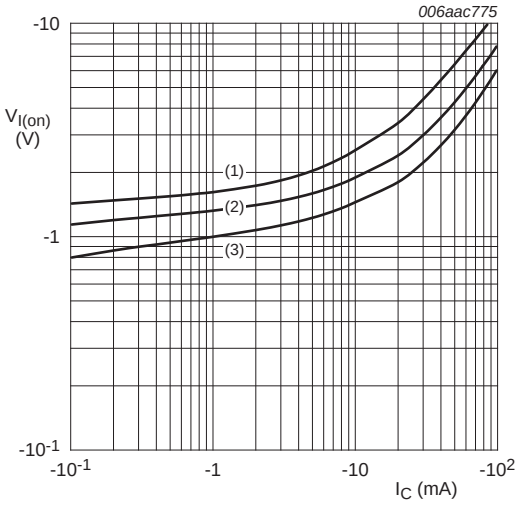

V_{CE} = –0.3V

(1) T_{amb} = –40 °C

(2) T_{amb} = 25 °C

(3) T_{amb} = 100 °C

Fig 14. PDTA114EQA: On-state input voltage as a function of collector current; typical values

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved

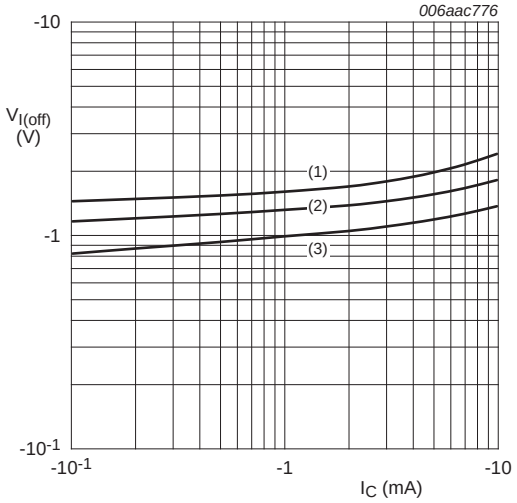

V_{CE} = −5 V

(1) T_{amb} = −40 °C

(2) T_{amb} = 25 °C

(3) T_{amb} = 100 °C

Fig 15. PDTA114EQA: Off-state input voltage as a function of collector current; typical values

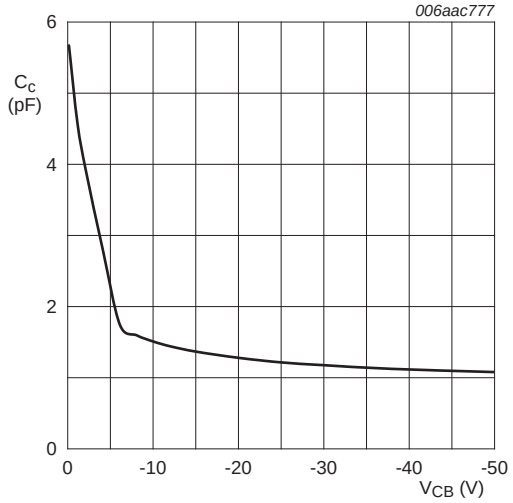

f = 1 MHz; T_{amb} = 25 °C

Fig 16. PDTA114EQA: Collector capacitance as a function of collector-base voltage; typical values

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved

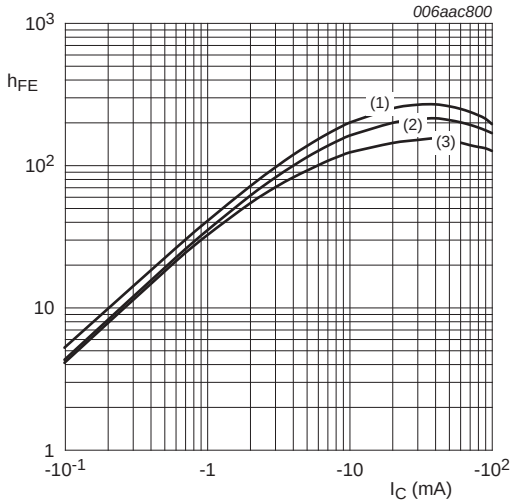

V_{CE} = −5 V

(1) T_{amb} = 100 °C

(2) T_{amb} = 25 °C

(3) T_{amb} = −40 °C

Fig 17. PDTA124EQA: DC current gain as a function of collector current; typical values

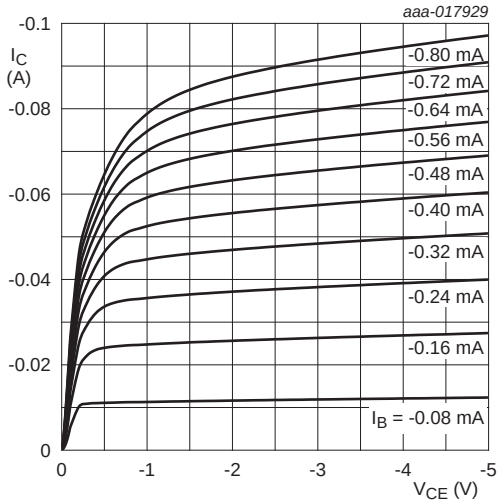

T_{amb} = 25 °C

Fig 18. PDTA124EQA: Collector current as a function of collector-emitter voltage; typical values

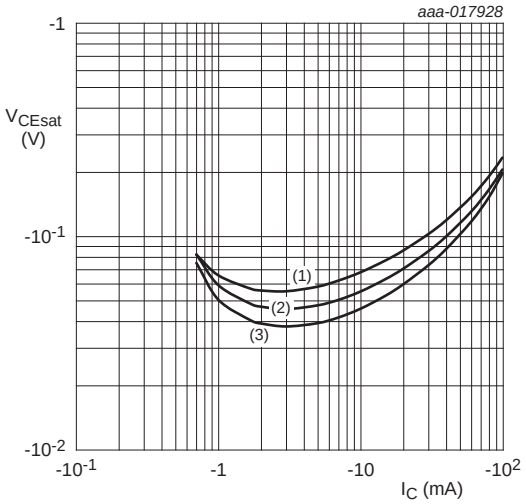

I_C/I_B = 20

(1) T_{amb} = 100 °C

(2) T_{amb} = 25 °C

(3) T_{amb} = −40 °C

Fig 19. PDTA124EQA: Collector-emitter saturation voltage as a function of collector current; typical values

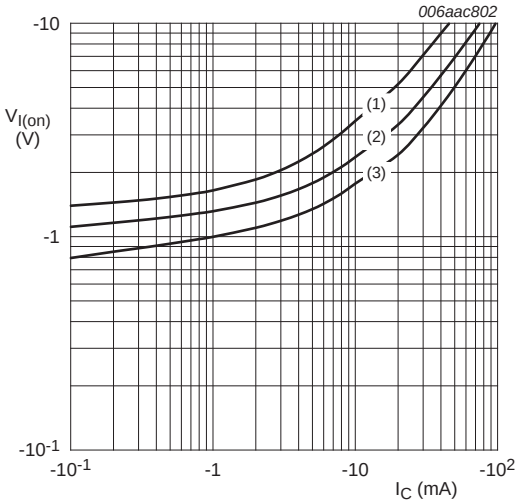

V_{CE} = −0.3 V

(1) T_{amb} = −40 °C

(2) T_{amb} = 25 °C

(3) T_{amb} = 100 °C

Fig 20. PDTA124EQA: On-state input voltage as a function of collector current; typical values

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved

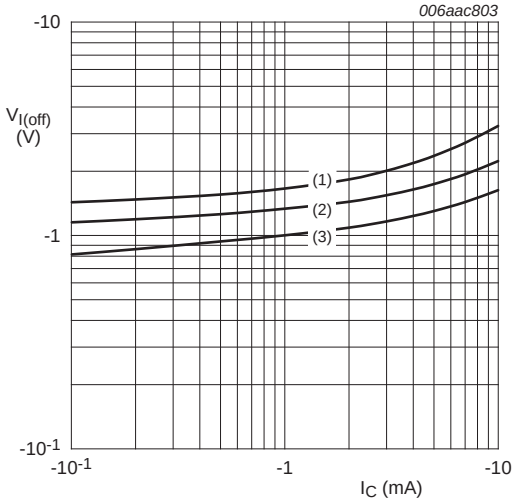

V_{CE} = −5 V

(1) T_{amb} = −40 °C

(2) T_{amb} = 25 °C

(3) T_{amb} = 100 °C

Fig 21. PDTA124EQA: Off-state input voltage as a function of collector current; typical values

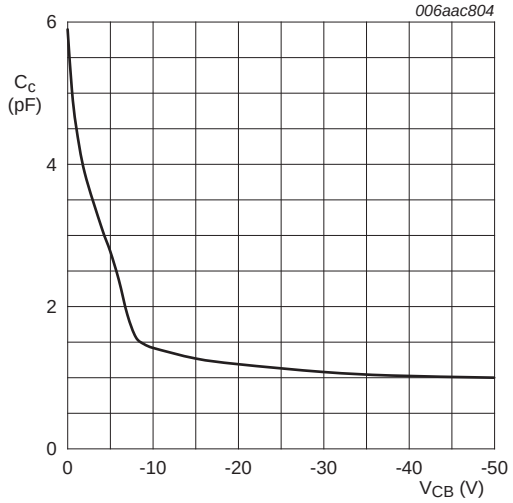

f = 1 MHz; T_{amb} = 25 °C

Fig 22. PDTA124EQA: Collector capacitance as a function of collector-base voltage; typical values

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved

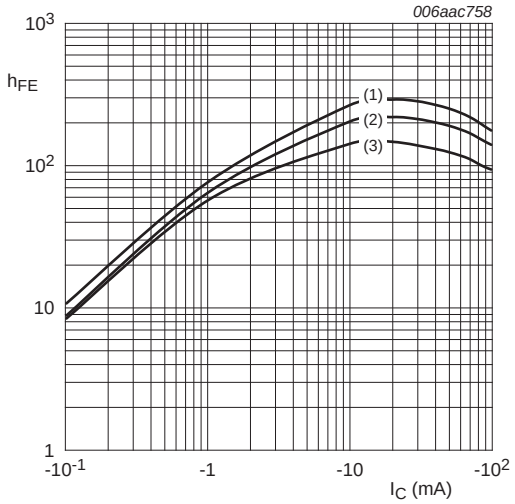

V_{CE} = −5 V

(1) T_{amb} = 100 °C

(2) T_{amb} = 25 °C

(3) T_{amb} = −40 °C

Fig 23. PDTA144EQA: DC current gain as a function of collector current; typical values

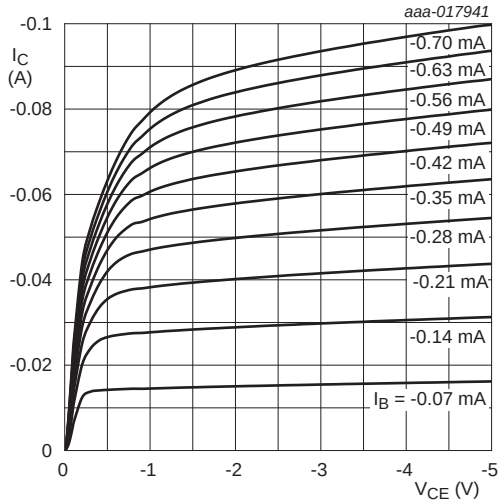

T_{amb} = 25 °C

Fig 24. PDTA144EQA: Collector current as a function of collector-emitter voltage; typical values

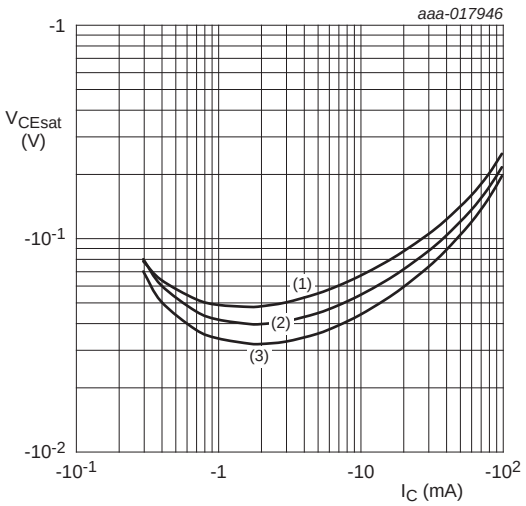

I_C/I_B = 20

(1) T_{amb} = 100 °C

(2) T_{amb} = 25 °C

(3) T_{amb} = −40 °C

Fig 25. PDTA144EQA: Collector-emitter saturation voltage as a function of collector current; typical values

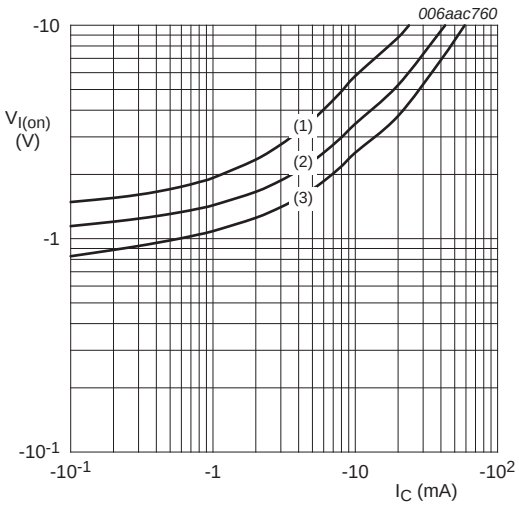

V_{CE} = −0.3 V

(1) T_{amb} = −40 °C

(2) T_{amb} = 25 °C

(3) T_{amb} = 100 °C

Fig 26. PDTA144EQA: On-state input voltage as a function of collector current; typical values

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved

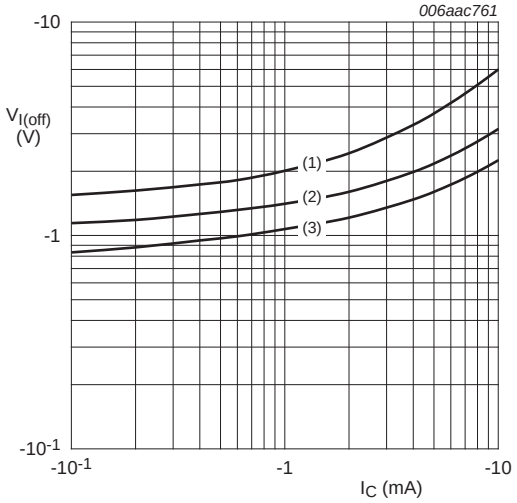

V_{CE} = −5 V

(1) T_{amb} = −40 °C

(2) T_{amb} = 25 °C

(3) T_{amb} = 100 °C

Fig 27. PDTA144EQA: Off-state input voltage as a function of collector current; typical values

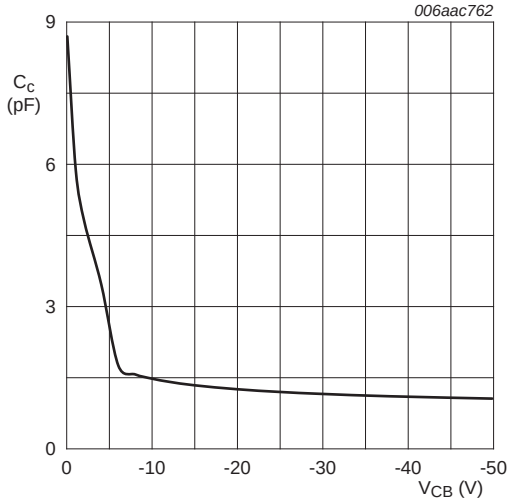

f = 1 MHz; T_{amb} = 25 °C

Fig 28. PDTA144EQA: Collector capacitance as a function of collector-base voltage; typical values

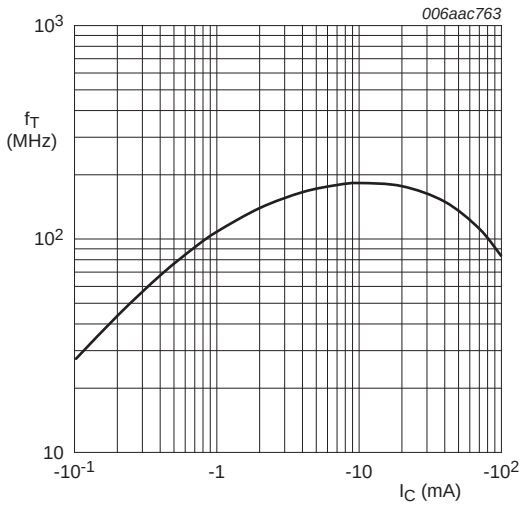

V_{CE} = −5 V; f = 100 MHz; T_{amb} = 25 °C

Fig 29. Transition frequency as a function of collector current; typical values of built-in transistor

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved

8. Test information

8.1 Quality information

This product has been qualified in accordance with the Automotive Electronics Council (AEC) standard *Q101 - Stress test qualification for discrete semiconductors*, and is suitable for use in automotive applications.

8.2 Resistor calculation

- Calculation of bias resistor 1 (R1):

$$R1 = \frac{V(I_{I2}) - V(I_{I1})}{I_{I2} - I_{I1}}$$

- Calculation of bias resistor ratio (R2/R1):

$$\frac{R2}{R1} = \frac{V(I_{I4}) - V(I_{I3})}{R1 \cdot (I_{I4} - I_{I3})} - 1$$

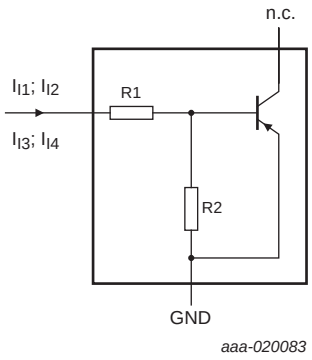

Fig 30. Resistor test circuit

8.3 Resistor test conditions

Table 9. Resistor test conditions

Type number	R1	R2	Test conditions			
	(kΩ)	(kΩ)	I_{I1}	I_{I2}	I_{I3}	I_{I4}
PDTA143EQA	4.7	4.7	−600 µA	−700 µA	600 µA	700 µA
PDTA114EQA	10	10	−350 µA	−450 µA	350 µA	450 µA
PDTA124EQA	22	22	−150 µA	−230 µA	150 µA	230 µA
PDTA144EQA	47	47	−55 µA	−105 µA	55 µA	105 µA

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2017. All rights reserved

9. Package outline

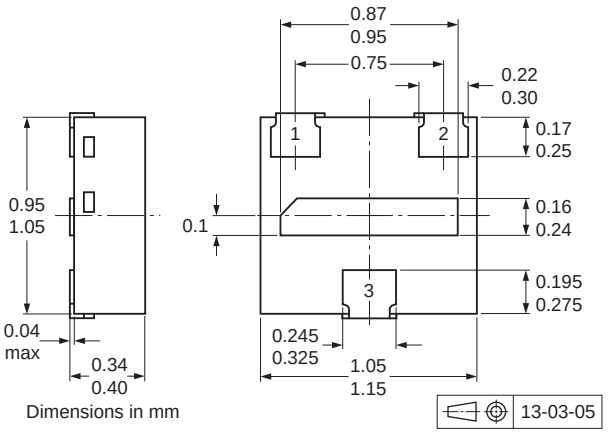

Fig 31. Package outline DFN1010D-3 (SOT1215)

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2017. All rights reserved

10. Soldering

Footprint information for reflow soldering of DFN1010D-3 package **SOT1215**

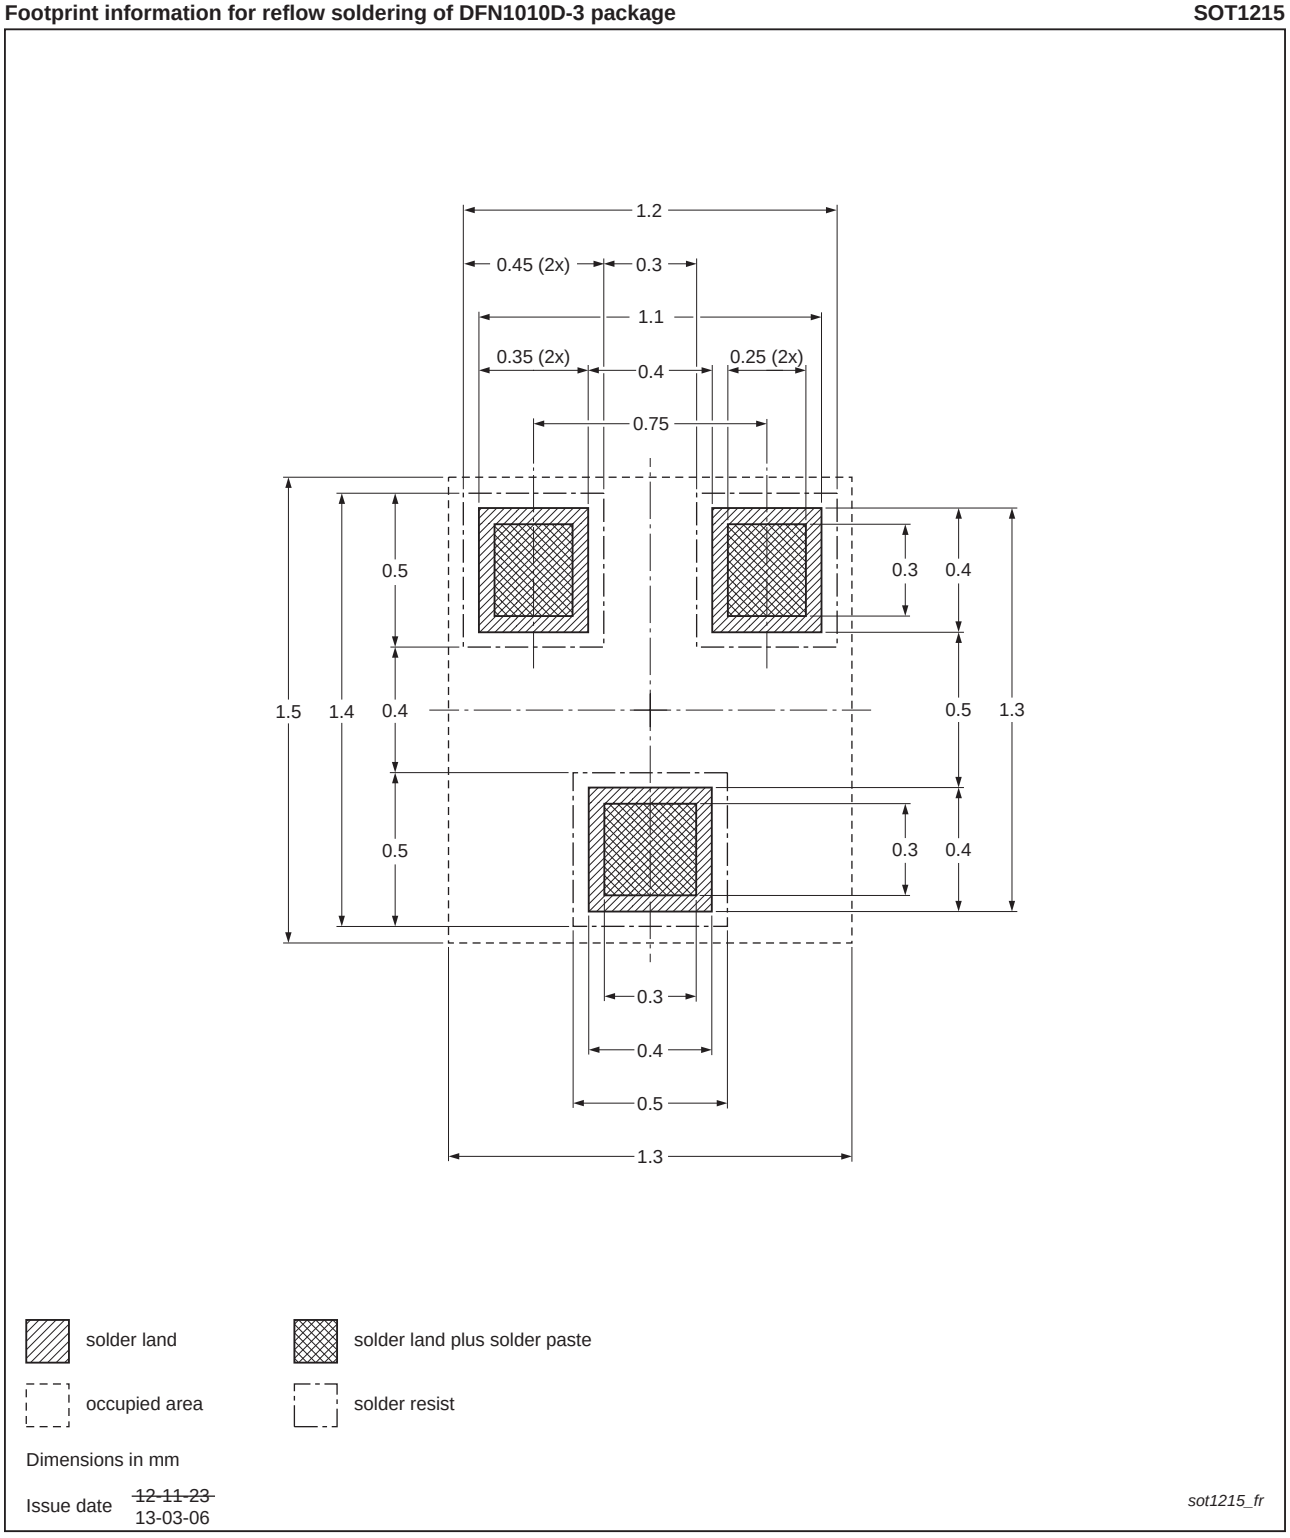

Fig 32. Reflow soldering footprint DFN1010D-3 (SOT1215)

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2017. All rights reserved

11. Revision history

Table 10. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
PDTA143/114/124/144EQA_SER v.1	20151218	Product data sheet	-	-

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2017. All rights reserved

12. Legal information

12.1 Data sheet status

Document status[1][2]	Product status[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nexperia.com.

12.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

12.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use in automotive applications — This Nexperia product has been qualified for use in automotive applications. Unless otherwise agreed in writing, the product is not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of a Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nexperia.com/profile/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

12.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

13. Contact information

For more information, please visit: **http://www.nexperia.com**

For sales office addresses, please send an email to: **salesaddresses@nexperia.com**

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved

14. Contents

1 Product profile 1
1.1 General description 1
1.2 Features and benefits 1
1.3 Applications 1
1.4 Quick reference data 1
2 Pinning information 2
3 Ordering information 2
4 Marking 3
4.1 Binary marking code description 3
5 Limiting values 3
6 Thermal characteristics 5
7 Characteristics 6
8 Test information 15
8.1 Quality information 15
8.2 Resistor calculation 15
8.3 Resistor test conditions 15
9 Package outline 16
10 Soldering 17
11 Revision history 18
12 Legal information 19
12.1 Data sheet status 19
12.2 Definitions 19
12.3 Disclaimers 19
12.4 Trademarks 20
13 Contact information 20
14 Contents 21

© **Nexperia B.V. 2017. All rights reserved**

For more information, please visit: http://www.nexperia.com
For sales office addresses, please send an email to: salesaddresses@nexperia.com
Date of release: 18 December 2015

Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331