

## SCHOTTKY BARRIER RECTIFIERS

APD340

### Features

- Low Forward Voltage Drop
- Very Small Conduction Losses
- High Surge Capability
- Surge Overload Rating up to 80A Peak Value

### Applications

- Low Voltage High Frequency Inverters
- DC-DC Converters
- Free Wheeling
- Polarity Protection

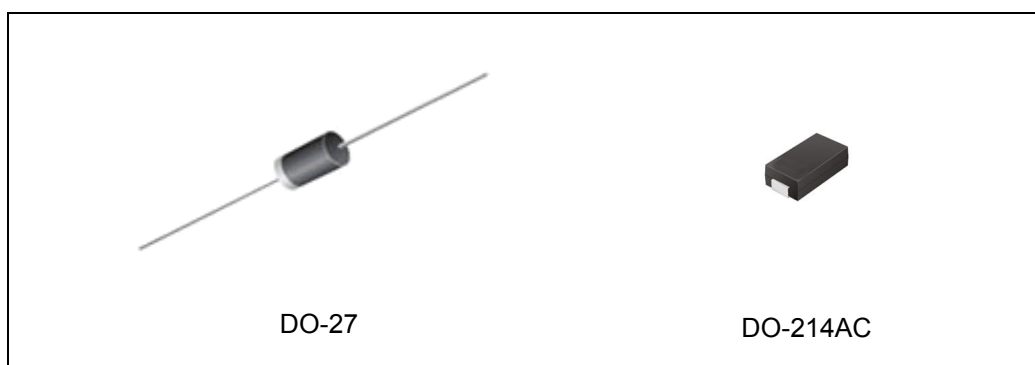


Figure 1. Package Types of APD340

### Pin Configuration

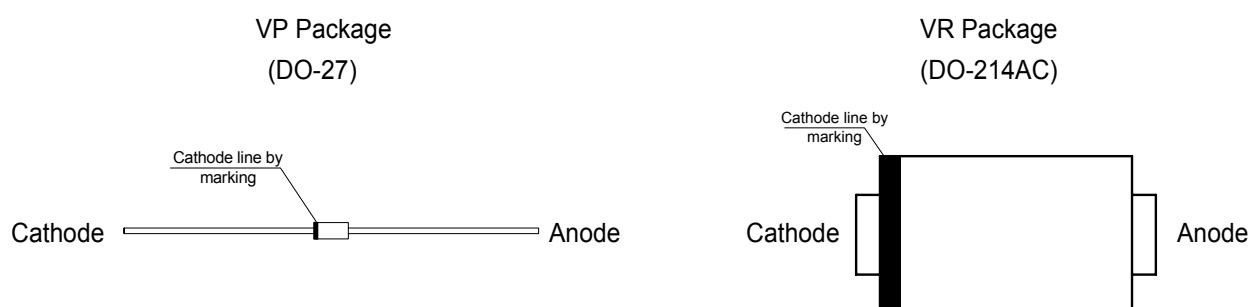
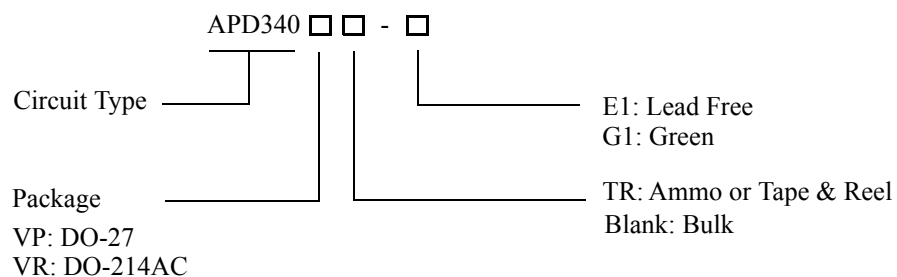


Figure 2. Pin Configuration of APD340

**SCHOTTKY BARRIER RECTIFIERS****APD340****Ordering Information**

| Package  | Temperature Range | Part Number   |               | Marking ID |        | Packing Type |
|----------|-------------------|---------------|---------------|------------|--------|--------------|
|          |                   | Lead Free     | Green         | Lead Free  | Green  |              |
| DO-27    | -50 to 125°C      | APD340VP-E1   | APD340VP-G1   | D340VP     | 340VPG | Bulk         |
|          |                   | APD340VPTR-E1 | APD340VPTR-G1 | D340VP     | 340VPG | Ammo         |
| DO-214AC | -50 to 125°C      |               | APD340VRTR-G1 |            | 340VRG | Tape & Reel  |

BCD Semiconductor's Pb-free products, as designated with "E1" suffix in the part number, are RoHS compliant. Products with "G1" suffix are available in green packages.

**SCHOTTKY BARRIER RECTIFIERS****APD340****Absolute Maximum Ratings** ( $T_A=25^{\circ}\text{C}$ , unless otherwise noted) (Note 1)

| Parameter                                                                              | Symbol      | Value      | Unit               |
|----------------------------------------------------------------------------------------|-------------|------------|--------------------|
| Maximum Repetitive Peak Reverse Voltage                                                | $V_{RRM}$   | 40         | V                  |
| Maximum DC Blocking Voltage                                                            | $V_{DC}$    | 40         | V                  |
| Maximum RMS Voltage                                                                    | $V_{RMS}$   | 28         | V                  |
| Average Rectified Forward Current<br>0.375 " (9.5mm) Lead Length                       | $I_{F(AV)}$ | 3.0        | A                  |
| Non-Repetitive Peak Forward Surge Current<br>8.3ms Single Half Sine-wave on Rated Load | $I_{FSM}$   | 80         | A                  |
| Operating Junction Temperature Range                                                   | $T_J$       | -50 to 125 | $^{\circ}\text{C}$ |
| Storage Temperature Range                                                              | $T_{STG}$   | -50 to 150 | $^{\circ}\text{C}$ |

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

**SCHOTTKY BARRIER RECTIFIERS****APD340****Thermal Characteristics** ( $T_A=25^{\circ}\text{C}$ , unless otherwise noted)

| Parameter                  | Symbol        |          | Values | Unit                 |
|----------------------------|---------------|----------|--------|----------------------|
| Typical Thermal Resistance | $\theta_{JA}$ | DO-27    | 40     | $^{\circ}\text{C/W}$ |
|                            |               | DO-214AC | 75     |                      |

**Electrical Characteristics** ( $T_A=25^{\circ}\text{C}$ , unless otherwise noted)

| Parameter                              |                           | Symbol | Values | Unit |
|----------------------------------------|---------------------------|--------|--------|------|
| Forward Voltage @ $I_F=3.0\text{A}$    |                           | $V_F$  | 0.5    | V    |
| Reverse Current @ Rated $V_R$ (Note 2) | $T_A=25^{\circ}\text{C}$  | $I_R$  | 0.5    | mA   |
|                                        | $T_A=100^{\circ}\text{C}$ |        | 10     |      |

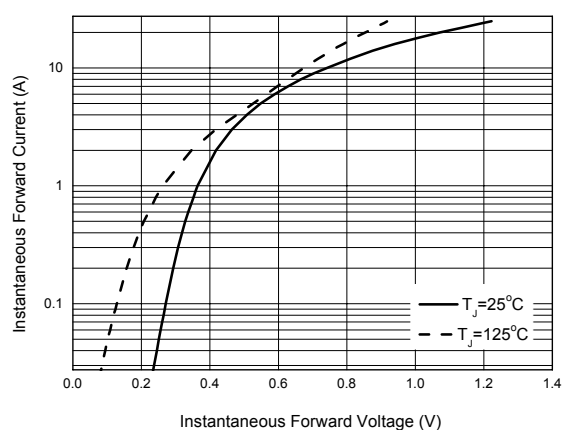
Note 2: Pulse Test: 300 $\mu\text{s}$  pulse width, 1.0% duty cycle.**Typical Performance Characteristics** ( $T_A=25^{\circ}\text{C}$ , unless otherwise noted)

Figure 3. Typical Instantaneous Forward Characteristics

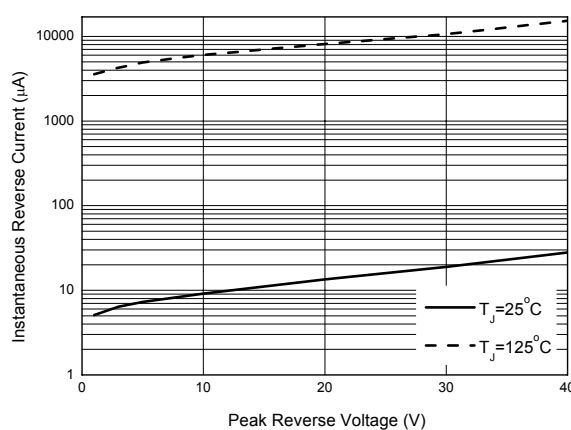


Figure 4. Typical Reverse Characteristics

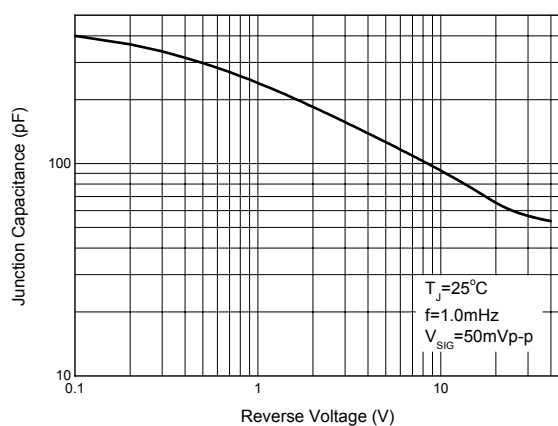
**SCHOTTKY BARRIER RECTIFIERS****APD340****Typical Performance Characteristics (Continued)**

Figure 5. Typical Junction Capacitance

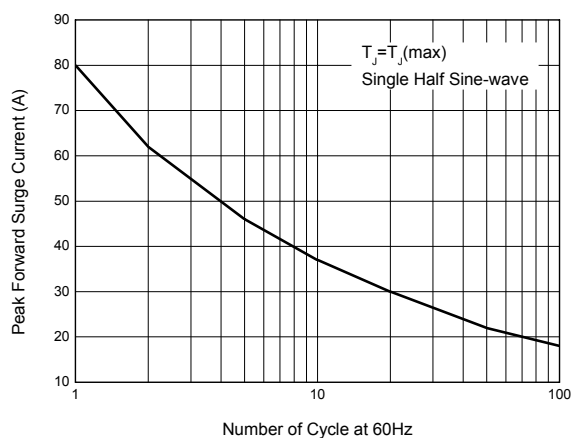


Figure 6. Maximum Non-Repetitive Peak Forward Surge Current



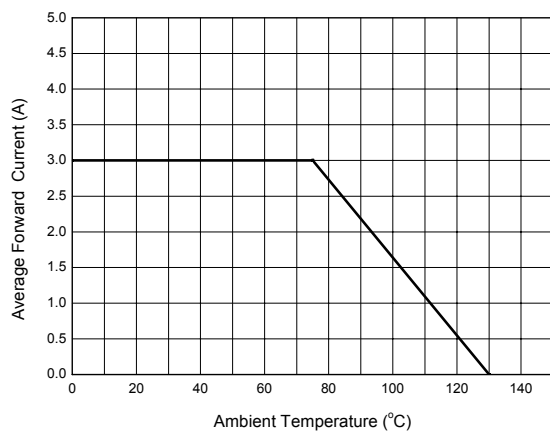


Figure 7. Forward Current Derating Curves

**SCHOTTKY BARRIER RECTIFIERS****APD340****Mechanical Dimensions****DO-27****Unit: mm(inch)**

**SCHOTTKY BARRIER RECTIFIERS****APD340****Mechanical Dimensions (Continued)****DO-214AC****Unit: mm(inch)**

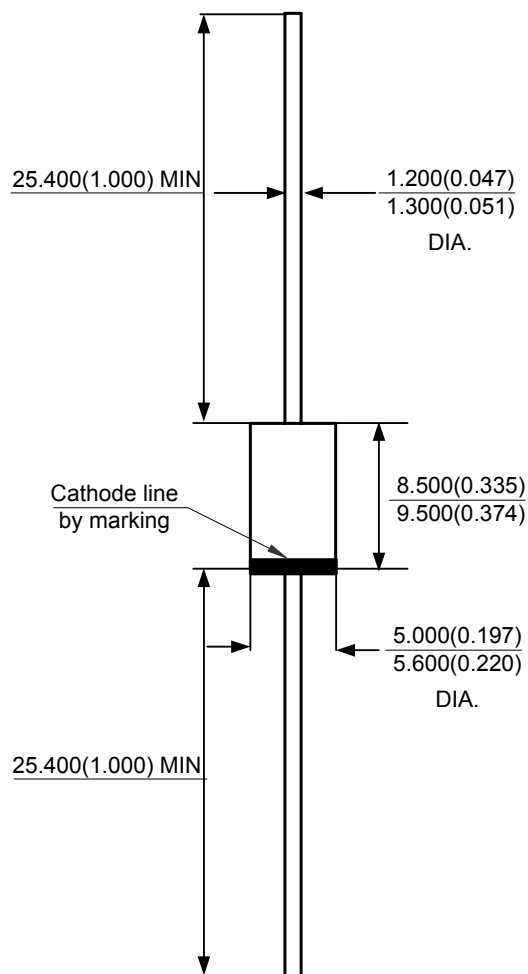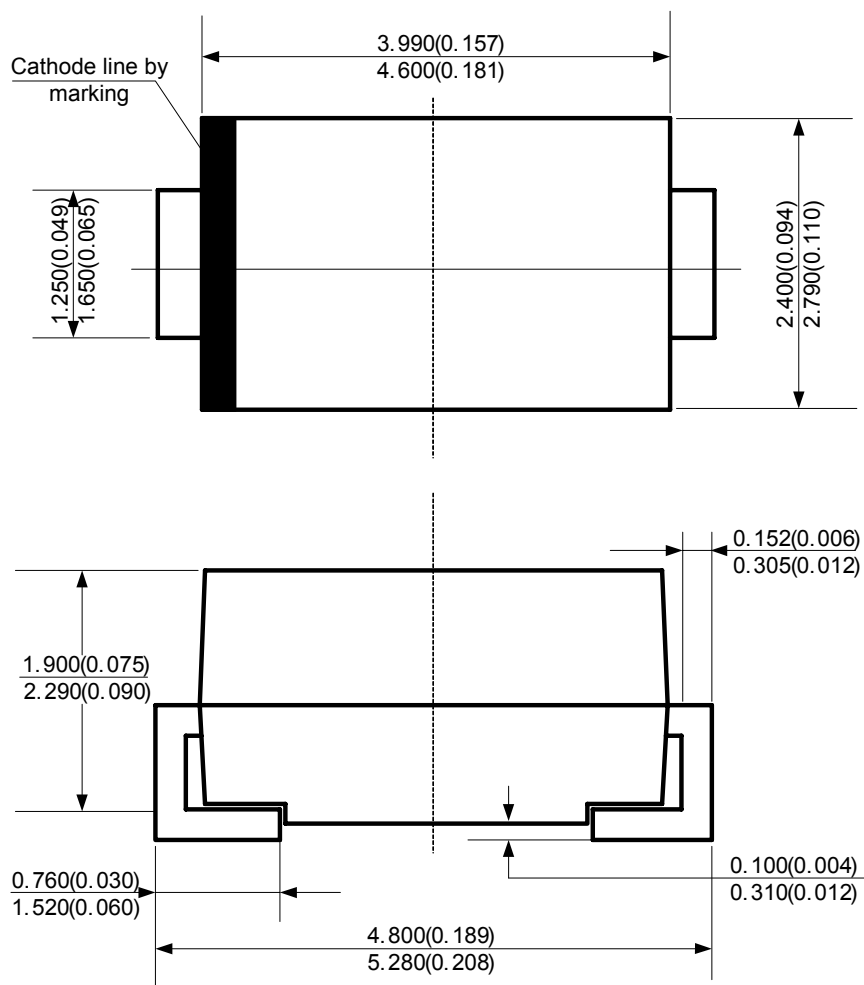

## **BCD Semiconductor Manufacturing Limited**

<http://www.bcdsemi.com>

### **IMPORTANT NOTICE**

BCD Semiconductor Manufacturing Limited reserves the right to make changes without further notice to any products or specifications herein. BCD Semiconductor Manufacturing Limited does not assume any responsibility for use of any its products for any particular purpose, nor does BCD Semiconductor Manufacturing Limited assume any liability arising out of the application or use of any its products or circuits. BCD Semiconductor Manufacturing Limited does not convey any license under its patent rights or other rights nor the rights of others.

---

#### **MAIN SITE**

##### **- Headquarters**

##### **BCD Semiconductor Manufacturing Limited**

No. 1600, Zi Xing Road, Shanghai ZiZhu Science-based Industrial Park, 200241, China  
Tel: +86-21-24162266, Fax: +86-21-24162277

##### **- Wafer Fab**

##### **Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd.**

800 Yi Shan Road, Shanghai 200233, China  
Tel: +86-21-6485 1491, Fax: +86-21-5450 0008

#### **REGIONAL SALES OFFICE**

##### **Shenzhen Office**

##### **Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd., Shenzhen Office**

Unit A Room 1203, Skyworth Bldg., Gaoxin Ave. I.S., Nanshan District, Shenzhen, China  
Tel: +86-755-8826 7951  
Fax: +86-755-8826 7865

##### **Taiwan Office**

##### **BCD Semiconductor (Taiwan) Company Limited**

4F, 298-1, Rui Guang Road, Nei-Hu District, Taipei, Taiwan  
Tel: +886-2-2656 2808  
Fax: +886-2-2656 2806

##### **USA Office**

##### **BCD Semiconductor Corp.**

30920 Huntwood Ave. Hayward, CA 94544, USA  
Tel : +1-510-324-2988  
Fax: +1-510-324-2788





**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331