

## Descriptions

The S1117 series of positive adjustable and fixed regulators are designed to provide 1A with high efficiency. All internal circuitry is designed to operate down to 1.3V input to output differential. On-chip trimming adjusts reference voltage to 2%.


## Features

- Adjustable or fixed output
- Output current of 1A
- Low dropout, 1.3V maximum at 1A output current
- Thermal shutdown protection

## Ordering Information

| Type NO.   | Marking             | Package Code |
|--|---------------------|--------------|
| S1117AD/S1117xxD   | S1117□□D/ S1117□□□D | D-PAK        |
| □□: Voltage Code (Aj : 1.25V, 15:1.5V, 18: 1.8V, 25:2.5V, 33:3.3V, 50:5.0V)<br>□□□: Voltage Code (285:2.85V) |                     |              |

## Outline Dimensions (Unit : mm)

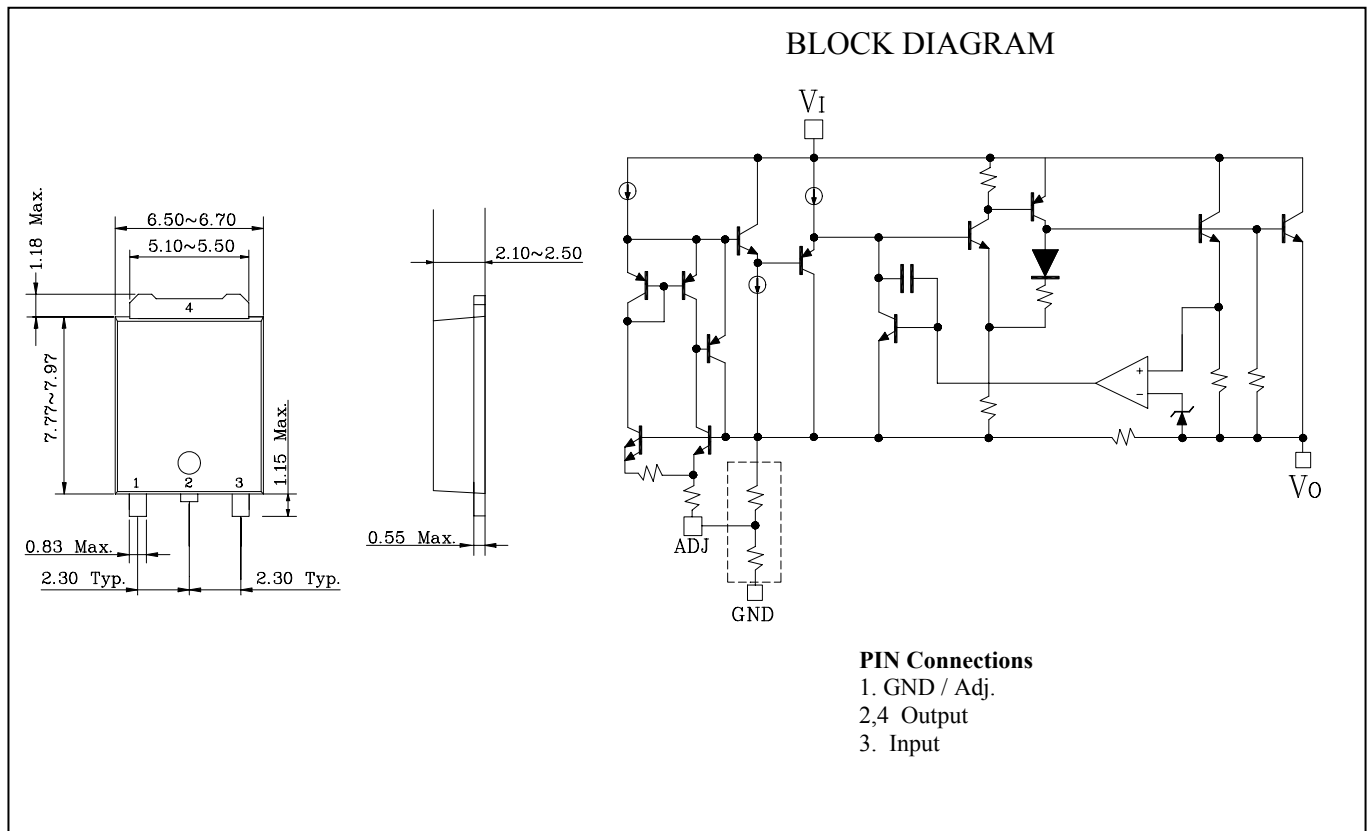

**Absolute Maximum Ratings**

[Ta=25°C]

| Characteristic              | Symbol           | Rating     | Unit |
|-----------------------------|------------------|------------|------|
| Input voltage               | $V_I$            | 16         | V    |
| Power Dissipation           | $P_{D1}$ (Note1) | 4.5        | W    |
|                             | $P_{D2}$ (Note2) | 1.5        |      |
| Junction Temperature        | $T_J$            | 150        | °C   |
| Operating temperature range | $T_{opr}$        | 0 ~ +125   | °C   |
| Storage temperature range   | $T_{stg}$        | -55 ~ +150 | °C   |

Note 1 : Mounted on a glass epoxy circuit board of 50.8 × 50.8mm. (at 1oz copper area)

Note 2 : No Heat sink

**Recommended operating conditions**

| Characteristic | Symbol | Min.       | Max.     | Unit |
|----------------|--------|------------|----------|------|
| Input voltage  | $V_I$  | $V_O+1.5V$ | $V_O+7V$ | V    |
| Output current | $I_O$  | 1          | 1000     | mA   |

**Device Selection Guide**

| Device     | Output Voltage |
|------------|----------------|
| S1117AD    | Adjustable     |
| S1117-15D  | 1.50V          |
| S1117-18D  | 1.80V          |
| S1117-25D  | 2.50V          |
| S1117-285D | 2.85V          |
| S1117-33D  | 3.30V          |
| S1117-50D  | 5.00V          |

Note 3 : Other fixed versions are available  $V_O=1.5V \sim 5V$

## Electrical Characteristics

(Electrical Characteristics at  $0^{\circ}\text{C} \leq T_a \leq 125^{\circ}\text{C}$  and  $V_I = (V_O + 1.5\text{V})$ ,  $I_O = 10\text{mA}$ ,  $C_O = 10\mu\text{F}$ , unless otherwise specified.)

| Characteristic            | Symbol                       | Device    | Test Condition   | Min | Typ  | Max  | Unit |               |
|---------------------------|------------------------------|-----------|--|-----|------|------|------|---------------|
| Output voltage            | $V_O$                        | S1117A    |  | *   | 1.23 | 1.28 | V    |               |
|                           |                              |           | $V_I = (V_O + 1.5\text{V})$ to 7V<br>$I_O = 0$ to 1000mA                                   |     | 1.20 | 1.30 |      |               |
|                           |                              | S1117-15  |  | *   | 1.47 | 1.53 |      |               |
|                           |                              |           | $V_I = (V_O + 1.5\text{V})$ to 7V<br>$I_O = 0$ to 1000mA                                   |     | 1.44 | 1.56 |      |               |
|                           |                              | S1117-18  |  | *   | 1.76 | 1.84 |      |               |
|                           |                              |           | $V_I = (V_O + 1.5\text{V})$ to 7V<br>$I_O = 0$ to 1000mA                                   |     | 1.73 | 1.87 |      |               |
|                           |                              | S1117-25  |  | *   | 2.45 | 2.55 |      |               |
|                           |                              |           | $V_I = (V_O + 1.5\text{V})$ to 7V<br>$I_O = 0$ to 1000mA                                   |     | 2.40 | 2.60 |      |               |
|                           |                              | S1117-285 |  | *   | 2.79 | 2.91 |      |               |
|                           |                              |           | $V_I = (V_O + 1.5\text{V})$ to 7V<br>$I_O = 0$ to 1000mA                                   |     | 2.74 | 2.96 |      |               |
|                           |                              | S1117-33  |  | *   | 3.23 | 3.37 |      |               |
|                           |                              |           | $V_I = (V_O + 1.5\text{V})$ to 7V<br>$I_O = 0$ to 1000mA                                   |     | 3.17 | 3.43 |      |               |
|                           |                              | S1117-50  |  | *   | 4.90 | 5.10 |      |               |
|                           |                              |           | $V_I = (V_O + 1.5\text{V})$ to 7V<br>$I_O = 0$ to 1000mA                                   |     | 4.80 | 5.20 |      |               |
| Line regulation (Note4)   | $ \Delta V_{O(\Delta V_I)} $ | All       | $1.5\text{V} \leq V_I - V_O \leq 7\text{V}$<br>$I_O = 10\text{mA}$                         | *   | -    | 5    | 10   | mV            |
| Load regulation (Note4)   | $ \Delta V_{O(\Delta I_L)} $ | All       | $1.5\text{V} \leq V_I - V_O \leq 7\text{V}$<br>$I_O = 10\text{mA} \sim 1000\text{mA}$      | *   | -    | 10   | 30   | mV            |
| Quiescent current         | $I_{QC}$                     | All       | $I_O = 0$  |     | -    | 7    | 13   | mA            |
| Minimum load current      | $I_{L(\text{MIN})}$          | S1117A    | $V_{\text{Adj}} = 0\text{V}$   |     |      | 3    | 7    | mA            |
| Adjust pin current        | $I_{\text{ADJ}}$             | S1117A    | $V_I = (V_O + 1.5\text{V})$ to 7V<br>$I_O = 100\text{mA}$                                  |     |      | 55   | 90   | $\mu\text{A}$ |
| Adjust pin current change | $ \Delta I_{\text{ADJ}} $    | S1117A    | $1.5\text{V} \leq V_I - V_O \leq 7\text{V}$<br>$I_O = 10\text{mA} \sim 1000\text{mA}$      |     |      | 1    | 5    | $\mu\text{A}$ |
| Dropout voltage           | $V_{\text{DROP}}$            | All       | $I_O = 1000\text{mA}$  | *   | -    | 1.2  | 1.3  | V             |
| Ripple rejection ratio    | RR                           | All       | $I_O = 1000\text{mA}$<br>$V_{\text{Ripple}} = 1\text{V}_{\text{P-P}}$ , $f = 120\text{Hz}$ | *   | 60   | 72   | -    | dB            |
| Current limit             | $I_{\text{LIMIT}}$           | All       | $I_O \geq 1000\text{mA}$   | *   | 1.1  |      |      | A             |

[ \* ]  $T_a = 25^{\circ}\text{C}$

Note 4: Low duty pulse testing with Kelvin connections required.

## ■ Typical Applications


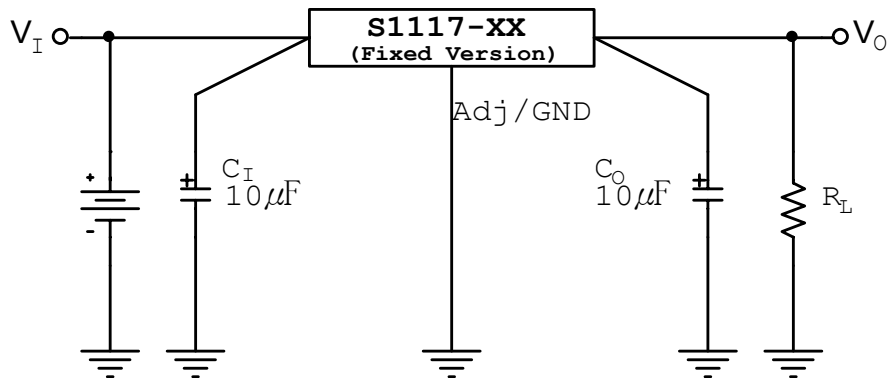


Fig. 1 Fixed Voltage Regulator

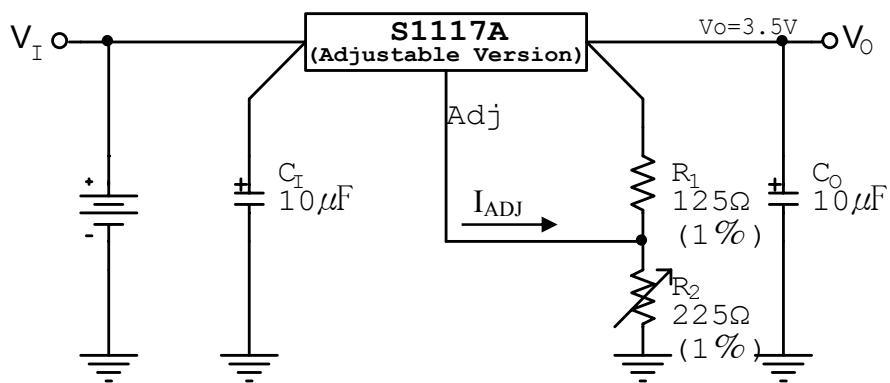

$$V_O = V_{ADJ} \times \left(1 + \frac{R_2}{R_1}\right) + I_{ADJ} \times R_2$$


Fig. 2 Adjustable Voltage Regulator

Notes 5:


- 1)  $C_I$  needed if device is far from filter capacitors
- 2)  $C_O$  minimum value required for stability

## Electrical Characteristic Curves


**Fig.3  $V_{DROD}$  vs  $I_O$**

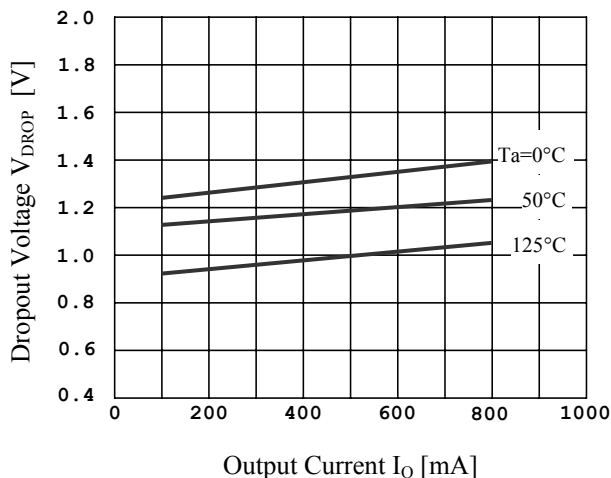


**Fig.4  $V_O$  vs  $T_a$**

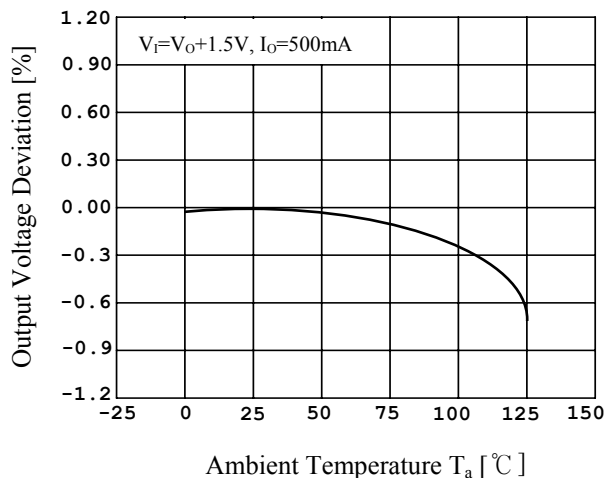


**Fig.5  $I_{L(MIN)}$  vs  $V_I - V_O$**

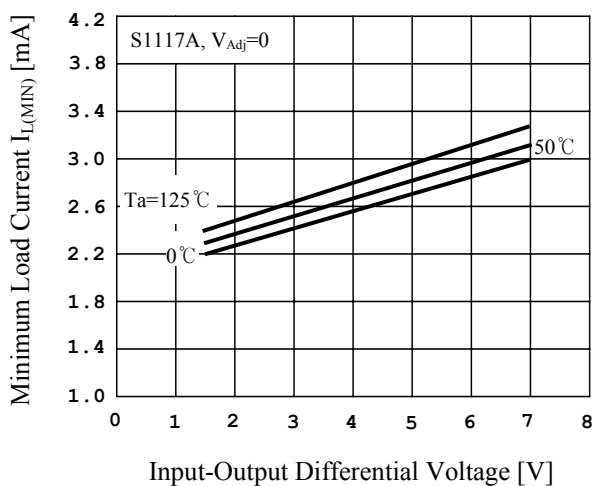

**Fig.6  $I_{Adj}$  vs  $T_a$**

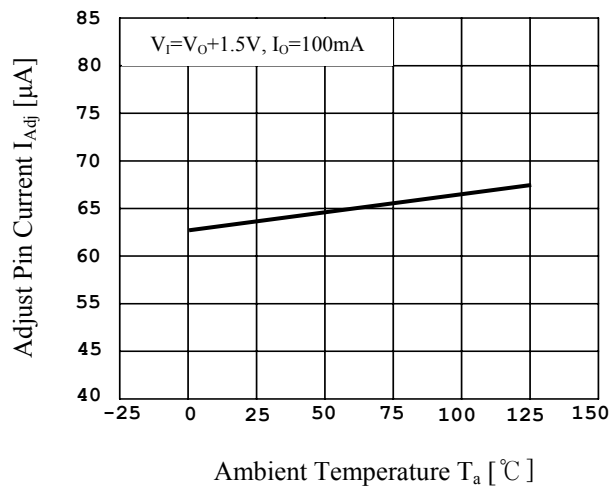

**Fig.7  $P_D$  vs  $T_a$**

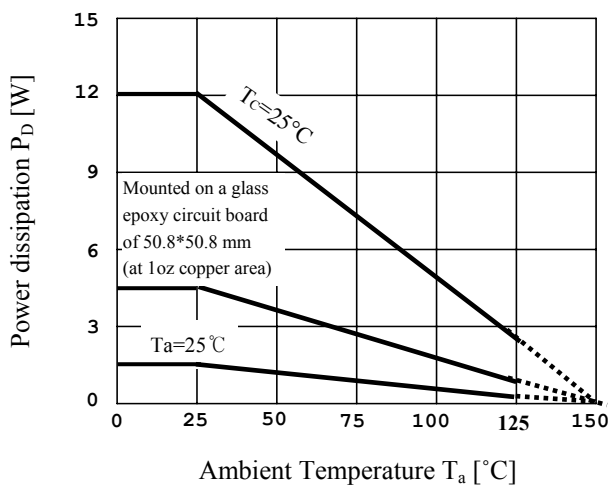

**The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).**

**Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..**

**Specifications mentioned in this publication are subject to change without notice.**



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331