

## Data Sheet

## ADCMP380

### FEATURES

- Comparator with on-chip reference**
- Ultralow power consumption with  $I_{CC} = 92 \text{ nA}$  (typical)**
- Precision low voltage monitoring down to 0.5 V**
- Accurate internal reference level over full temperature range**
  - $\pm 1.6\%$  at 1 V
  - $\pm 2.2\%$  at 0.5 V
- Enable input**
- 23  $\mu\text{s}$  typical propagation delay**
- Open-drain type output**
- Input glitch immunity**
- Available in a 1.46 mm  $\times$  0.96 mm WLCSP**
- Operational temperature range:  $-40^\circ\text{C}$  to  $+85^\circ\text{C}$**

### APPLICATIONS

- Portable/battery-operated equipment**
- Battery monitors**
- Energy harvesting**

### GENERAL DESCRIPTION

The ADCMP380 is an ultralow power voltage comparator with internal reference suitable for use in general-purpose applications. The ultralow power consumption of this device makes it suitable for power efficiency sensitive systems, such as battery-powered portable devices and energy meters.

The ADCMP380 is available with a 0.5 V and 1 V internal reference with  $\pm 2.2\%$  and  $\pm 1.6\%$  accuracy, respectively, over the full temperature range; this internal reference enables the device to monitor the node of interest accurately to 0.5 V. The enable input allows the user to hold the output low regardless of the state of the input.

### FUNCTIONAL BLOCK DIAGRAM

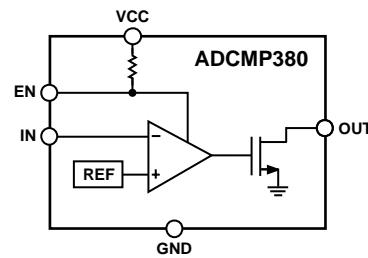


Figure 1.

12783-001

The ADCMP380 is available in a 6-ball, 1.46 mm  $\times$  0.96 mm WLCSP and is specified over the temperature range of  $-40^\circ\text{C}$  to  $+85^\circ\text{C}$ .

Table 1. Selection Table

| Part No.   | Reference Voltage (V) | Output     |
|------------|-----------------------|------------|
| ADCMP380-1 | 1                     | Open-drain |
| ADCMP380-2 | 0.5                   | Open-drain |

Rev. A

Document Feedback

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.  
Tel: 781.329.4700 ©2015–2016 Analog Devices, Inc. All rights reserved.  
Technical Support [www.analog.com](http://www.analog.com)

## TABLE OF CONTENTS

|  |   |   |    |
|--|---|---|----|
| Features .....                                   | 1 | Typical Performance Characteristics ..... | 6  |
| Applications.....                                | 1 | Theory of Operation .....                 | 8  |
| Functional Block Diagram .....                   | 1 | Transient Immunity .....                  | 8  |
| General Description .....                        | 1 | Output.....                               | 8  |
| Revision History .....                           | 2 | EN Input .....                            | 8  |
| Specifications.....                              | 3 | Adding Hysteresis.....                    | 8  |
| Absolute Maximum Ratings.....                    | 4 | Device Options .....                      | 9  |
| Thermal Resistance .....                         | 4 | Outline Dimensions.....                   | 10 |
| ESD Caution.....                                 | 4 | Ordering Guide.....                       | 10 |
| Pin Configuration and Function Descriptions..... | 5 |   |    |

## REVISION HISTORY

**2/16—Rev. 0 to Rev. A**

Changes to Ordering Guide .....

**3/15—Revision 0: Initial Version**

## SPECIFICATIONS

$V_{CC} = 2 \text{ V to } 5.5 \text{ V}$ ,  $V_{IN} < V_{CC} + 0.3 \text{ V}$ ,  $T_A = -40^\circ\text{C} \text{ to } +85^\circ\text{C}$ , unless otherwise noted. Typical values are at  $T_A = 25^\circ\text{C}$ .

Table 2.

| Parameter  | Symbol   | Min            | Typ        | Max                           | Unit                   | Test Conditions/Comments  |
|--|--|----------------|------------|-------------------------------|------------------------|---|
| OPERATING VOLTAGE RANGE  | $V_{CC}$                                       | 2<br>0.9       |            | 5.5                           | V<br>V                 | Guarantees valid OUT output<br>Guarantees OUT low   |
| UNDERVOLTAGE LOCKOUT (UVLO)<br>Input Voltage Rising<br>Input Voltage Falling<br>Hysteresis | $UVLO_{RISE}$<br>$UVLO_{FALL}$<br>$UVLO_{HYS}$ |                | 1.65       | 1.95<br>90                    | V<br>V<br>mV           |   |
| INPUT CURRENT<br>$V_{CC}$ Quiescent Current  | $I_{CC}$                                       |                | 92         | 190<br>110                    | nA<br>nA               | OUT high<br>OUT high, $T_A = 25^\circ\text{C}$  |
| IN Average Input Current   | $I_{VIN}$                                      |                | 4          | 8.5<br>4                      | nA<br>nA               | $V_{IN} = 2 \text{ V}, V_{CC} = 5.5 \text{ V}$<br>$V_{IN} = 2 \text{ V}, V_{CC} = 2 \text{ V}$  |
| REFERENCE VOLTAGE<br>ADCMP380-1<br>ADCMP380-2  | $V_{REF}$                                      | 0.984<br>0.489 | 1<br>0.5   | 1.016<br>0.511                | V<br>V                 | Input falling<br>$V_{REF} = 1 \text{ V}$<br>$V_{REF} = 0.5 \text{ V}$   |
| INPUT HYSTERESIS   | $V_{HYST}$                                     |                | 10.3       |                               | mV                     |   |
| PROPAGATION DELAY<br>IN to OUT   | $t_{PD}$                                       | 13.5<br>22     | 23<br>39.5 | 35<br>61                      | μs<br>μs               | IN falling with $V_{REF} \times 10\%$ overdrive<br>IN rising with $V_{REF} \times 10\%$ overdrive   |
| IN GLITCH REJECTION  | $t_{GR\_IN}$                                   |                | 21<br>38   |                               | μs<br>μs               | IN falling with $V_{REF} \times 10\%$ overdrive<br>IN rising with $V_{REF} \times 10\%$ overdrive   |
| OUT OUTPUT<br>Output Voltage Low   | $V_{OUT\_OL}$                                  |                |            | 0.4<br>0.4<br>0.4<br>0.4<br>5 | V<br>V<br>V<br>V<br>nA | $V_{CC} > 4.25 \text{ V}, I_{SINK} = 6.5 \text{ mA}$<br>$V_{CC} > 2.5 \text{ V}, I_{SINK} = 6 \text{ mA}$<br>$V_{CC} > 1.2 \text{ V}, I_{SINK} = 4.6 \text{ mA}$<br>$V_{CC} > 0.9 \text{ V}, I_{SINK} = 0.9 \text{ mA}$<br>$V_{OUT} = V_{CC} = 5.5 \text{ V}$ |
| Leakage Current  |  |                |            |                               |                        |   |
| EN INPUT<br>$V_{IL}$<br>$V_{IH}$   |  |                | 0.9        | 0.4                           | V<br>V                 |   |
| EN Glitch Rejection  |  |                |            | 0.4                           | μs                     |   |
| EN to OUT Delay  | $t_{D\_EN}$                                    | 0.5            | 0.65       |                               | μs                     |   |
| EN Pull-Up Resistance  |  |                | 0.6        | 0.82                          | MΩ                     | EN falling  |

## ABSOLUTE MAXIMUM RATINGS

Table 3.

| Parameter                   | Rating                            |
|-----------------------------|-----------------------------------|
| VCC                         | -0.3 V to +6 V                    |
| OUT                         | -0.3 V to +6 V                    |
| IN                          | -0.3 V to +6 V                    |
| EN                          | -0.3 V to V <sub>CC</sub> + 0.3 V |
| Input/Output Current        | 10 mA                             |
| Storage Temperature Range   | -40°C to +150°C                   |
| Operating Temperature Range | -40°C to +85°C                    |

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.

## THERMAL RESISTANCE

$\theta_{JA}$  is specified for a device soldered on an FR4 board with a minimum footprint.

Table 4.

| Package Type | $\theta_{JA}$ | Unit |
|--------------|---------------|------|
| 6-Ball WLCSP | 105.6         | °C/W |

## ESD CAUTION



### ESD (electrostatic discharge) sensitive device.

Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

## PIN CONFIGURATION AND FUNCTION DESCRIPTIONS





Figure 2. Pin Configuration


Table 5. Pin Function Descriptions

| Pin No. | Mnemonic | Description   |
|---------|----------|---|
| A1      | VCC      | Power Supply Input. It is recommended to place a 0.1 $\mu\text{F}$ decoupling capacitor between the VCC pin and the GND pin.                  |
| A2      | GND      | Ground. Both GND pins on the ADCMP380 must be grounded.   |
| B1      | EN       | Active High Output Enable Input. If required, a 0.1 $\mu\text{F}$ capacitor between the EN pin and ground provides additional noise immunity. |
| B2      | GND      | Ground. Both GND pins on the ADCMP380 must be grounded.   |
| C1      | IN       | Comparator Input.   |
| C2      | OUT      | Open-Drain Comparator Output.   |


## TYPICAL PERFORMANCE CHARACTERISTICS

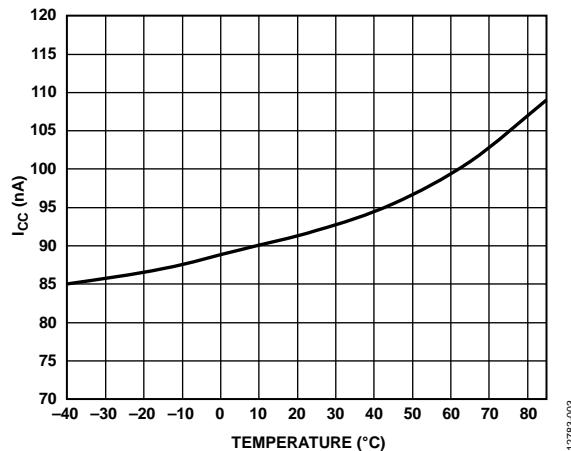


12783-03

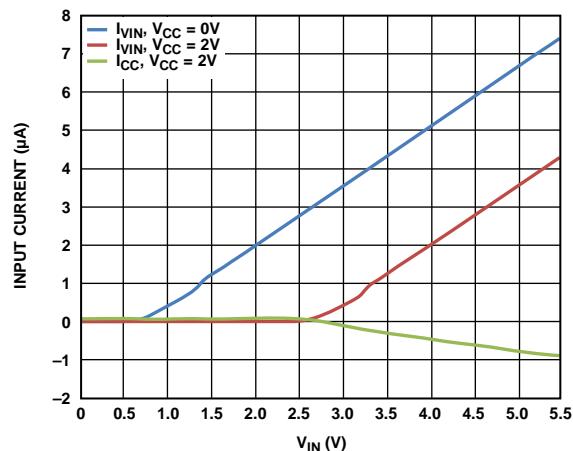


12783-06

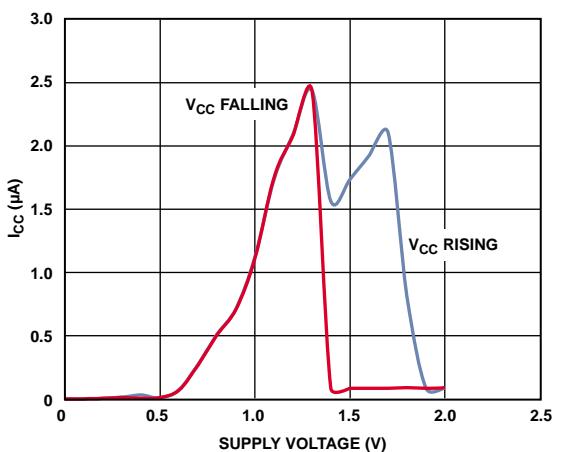


12783-004

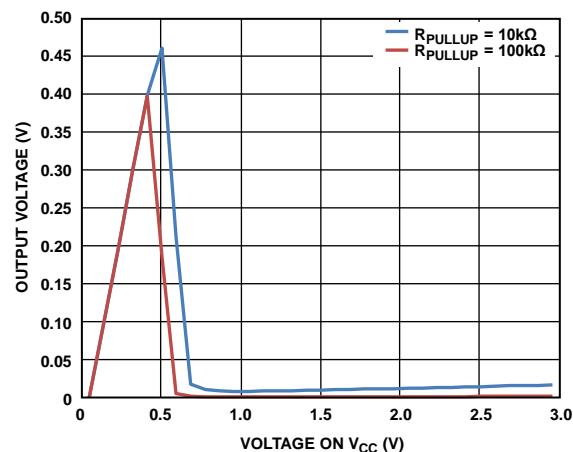

12783-007

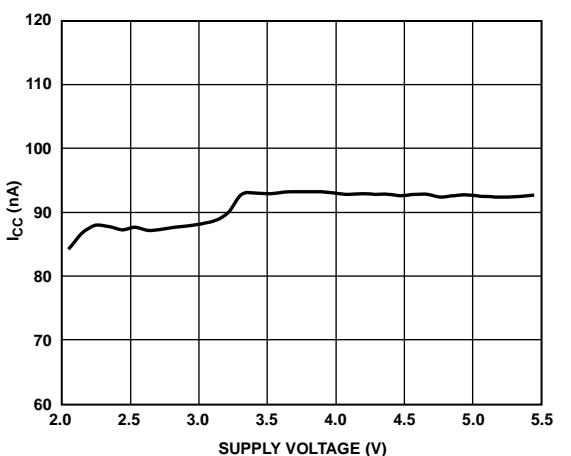

12783-005

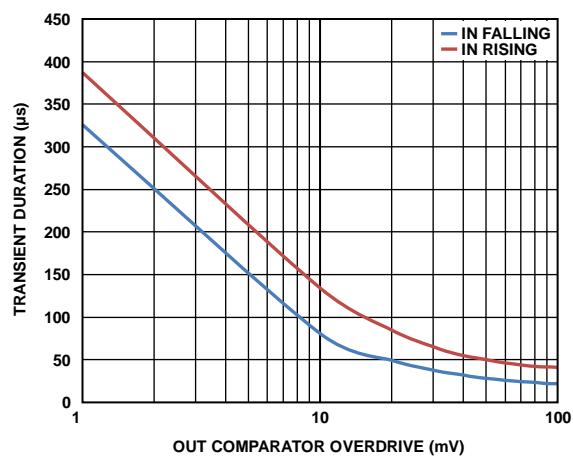

12783-008

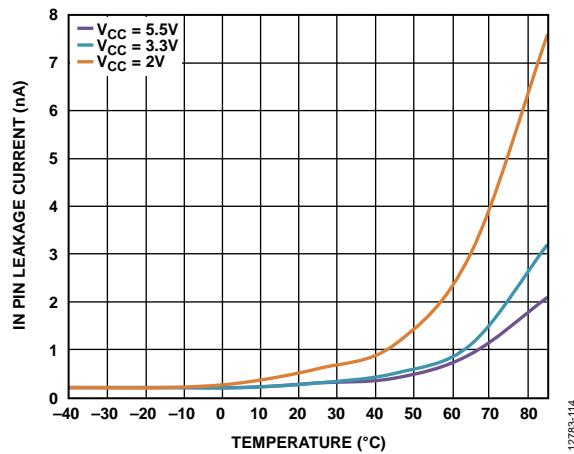


Figure 9. IN Pin Leakage Current vs. Temperature

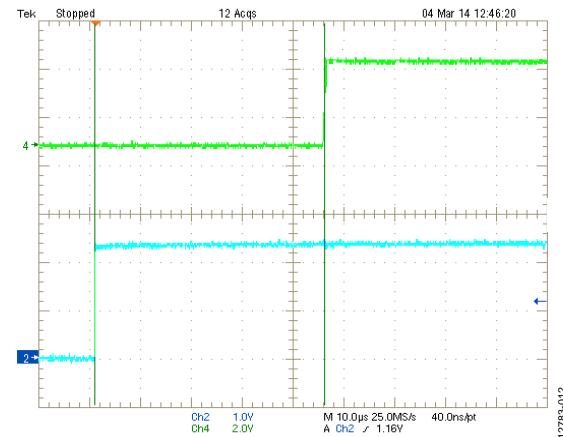


Figure 12. OUT Delay With IN Rising, Channel 2 = IN, Channel 4 = OUT

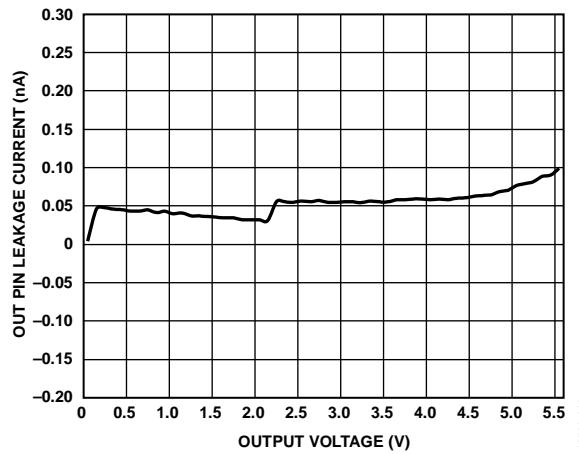


Figure 10. OUT Pin Leakage Current vs. Output Voltage, OUT Logic High

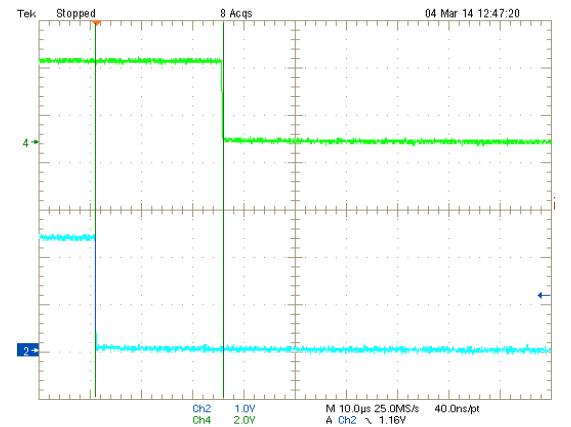
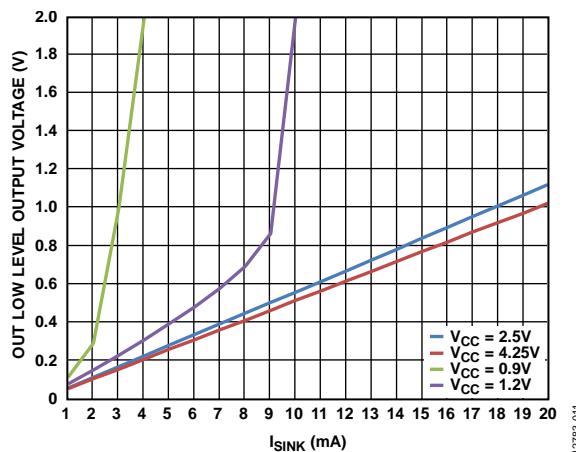


Figure 13. OUT Delay With IN Falling, Channel 2 = IN, Channel 4 = OUT

Figure 11. OUT Low Level Output Voltage ( $V_{OUT\_OU}$ ) vs. Sink Current ( $I_{SINK}$ )

## THEORY OF OPERATION

The **ADCMP380** ultralow power voltage comparator is especially suited for battery-powered applications due to the maximum 190 nA quiescent current. The internal precision reference and the low input leakage current allow the user to monitor the voltage of interest accurately through external resistor dividers. The device features internal input hysteresis and an open-drain output. The output remains logic high after the voltage on the IN pin is above the internal reference voltage. The device keeps the output in a logic low state whenever the supply voltage on the VCC pin is below the UVLO threshold. The output can be disabled and remains low if the EN pin is pulled low, regardless of the status of the IN pin.

### TRANSIENT IMMUNITY

To avoid unnecessary output state change caused by fast power supply transients, an input glitch filter is added to the IN pin of the **ADCMP380** to filter out the transient glitches on the pin.

Figure 8 shows the comparator overdrive (that is, the maximum magnitude of positive and negative going pulses with respect to the reference voltage) vs. the pulse duration without changing the state of the output.

### OUTPUT

The output of **ADCMP380** comparator is open-drain. The output is guaranteed to be logic low from when  $V_{CC} = 0.9$  V to when the device exits ULVO.

When the IN voltage falls below the internal reference voltage, the OUT pin asserts low within 23  $\mu$ s (typical). When the monitored voltage rises above the reference voltage plus hysteresis, the OUT pin asserts high within 39.5  $\mu$ s.

### EN INPUT

Driving EN low asserts the output low. The EN input has a 0.6 M $\Omega$  internal pull-up resistor so that the input is always high when unconnected. To drive the EN input, use an external signal or a push-button switch to ground; debounce circuitry is integrated on-chip for this purpose. Noise immunity is provided on the EN input, and fast, negative going transients of up to 0.4  $\mu$ s (typical) are ignored. If required, a 0.1  $\mu$ F capacitor between the EN pin and ground provides additional noise immunity.

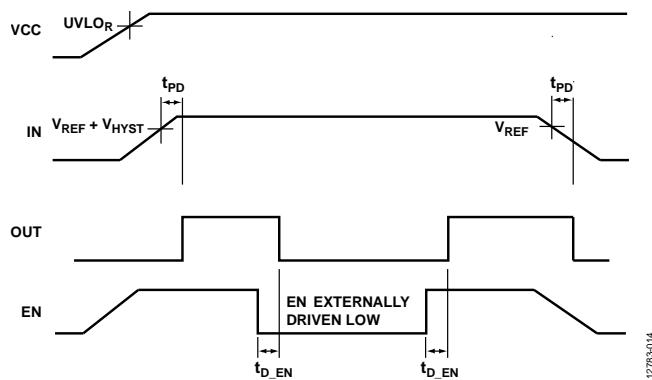


Figure 14. Timing Diagram

12783-014

### ADDING HYSTERESIS

To prevent oscillations at the output caused by noise or slowly moving signals passing the switching threshold, positive feedback can add hysteresis to the input.

For the configuration shown in Figure 15, connect the bottom end of the input resistor divider to the output; the effective threshold is altered based on the output state.

The input falling threshold level is given by

$$V_{IN\_FALL} = \frac{V_{REF}(R1 + R2 + R_{PULLUP}) - V_{SUPPLY}R1}{R2 + R_{PULLUP}}$$

where  $V_{REF} = 0.6$  V, assuming  $R_{LOAD} \gg R2$  and  $R_{PULLUP}$ , where  $R_{LOAD}$  is the resistance on the load.


The input rising threshold level is given by

$$V_{IN\_RISE} = \frac{V_{REF}(R1 + R2)}{R2}$$

The additional hysteresis is the difference between these voltage levels and is given by

$$\Delta V_{IN} = \frac{V_{REF}R1R_{PULLUP} + V_{SUPPLY}R1R2}{R2 \times R2 + R2 \times R_{PULLUP}}$$

Note that the built in hysteresis of the device is neglected in this calculation.

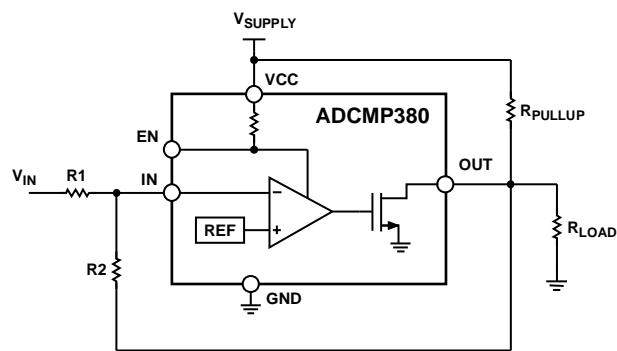

12783-015

Figure 15. Configuration with Added Hysteresis

## DEVICE OPTIONS

Table 6. Reference Voltage ( $V_{REF}$ ) Options ( $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ )

| Model Number | Min   | Typ | Max   | Unit |
|--------------|-------|-----|-------|------|
| ADCMP380-1   | 0.984 | 1   | 1.016 | V    |
| ADCMP380-2   | 0.489 | 0.5 | 0.511 | V    |


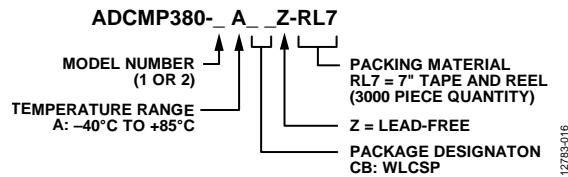


Figure 16. Ordering Code Structure

## OUTLINE DIMENSIONS

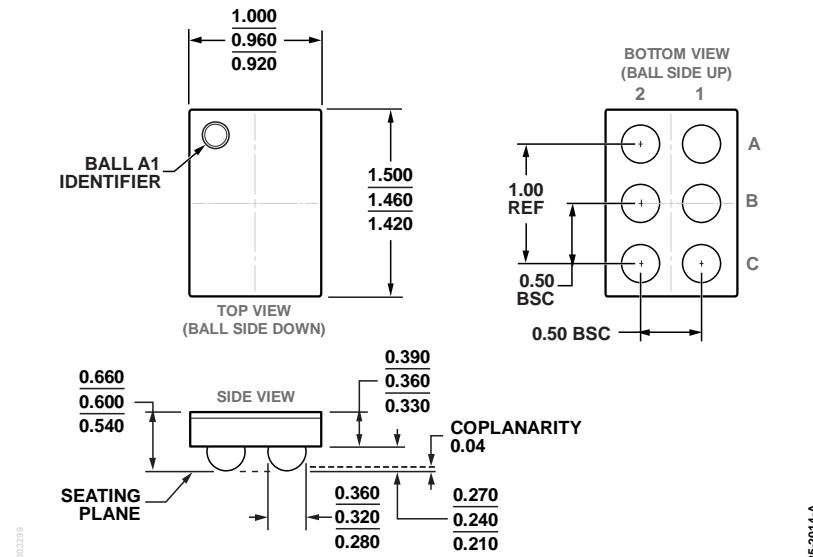

PHG-003289

08-25-2014-A

Figure 17. 6-Ball Wafer Level Chip Scale Package [WLCSP]  
(CB-6-17)  
Dimensions shown in millimeters

## ORDERING GUIDE

| Model <sup>1</sup> | Temperature Range | Package Description                           | Package Option | Branding |
|--------------------|-------------------|---|----------------|----------|
| ADCM380-1ACBZ-RL7  | -40°C to +85°C    | 6-Ball Wafer Level Chip Scale Package [WLCSP] | CB-6-17        | CW       |
| ADCM380-2ACBZ-RL7  | -40°C to +85°C    | 6-Ball Wafer Level Chip Scale Package [WLCSP] | CB-6-17        | LQZ      |
| ADCM380-EVALZ      |                   | Evaluation Board                              |                |          |

<sup>1</sup> Z = RoHS Compliant Part.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литер Н,  
помещение 100-Н Офис 331