

T Series



QorIQ T2080 and T2081 communication processors

Overview

The 28 nm QorIQ T2080 and T2081 communications processors bring the architectural innovations of the T series flagship T4240, such as the 1.8 GHz dual-threaded e6500 core, into an eight virtual core mid-range platform at reduced power and price points.

The T2080 processor is primarily intended to succeed our successful P3041 and P2041 mid-range series of quad-core devices as a control plane or integrated control and data plane processor. It provides an excellent migration path, as it offers 2x or better in core capability, cache size, SerDes bandwidth and Ethernet connectivity within a similar power budget. It also provides a value engineering opportunity for P4080 customers, as T2080 provides equivalent performance at much lower price and power.

The T2081 is a smaller package version of the T2080, which is pin compatible with the quad-core T1042. This provides T1042 customers an easy upgrade to higher performance if processing requirements increase. It also enables customers to reuse a single board for two different product performance levels.

Target Markets and Applications

The T2080 and T2081 processors are targeted at mid-range control plane applications or mixed control and data plane applications. The highly efficient eight virtual core device achieves up to 1.8 GHz even while maintaining a short seven-stage pipeline for better latency response to unpredictable control plane code branches. Advanced virtualization technology facilitates

safe partitioning of control and data plane applications within the device.

- Enterprise equipment: Modular Ethernet switches, services cards, UTM equipment, enterprise storage, data center
- Service provider: Core and edge routers, broadband access, metro Ethernet, optical networking
- Wireless infrastructure: Mobile backhaul, NICs, channel cards, control cards in LTE, WCDMA, GSM, WiMAX
- Aerospace and defense: ruggedized or highly secure routers, avionics networking, instrumentation panels, military SBCs
- Industrial computing: SBCs, factory automation, test and measurement

e6500 Core


The T2080 and T2081 processors are based on the 64-bit e6500 core, built on Power Architecture® technology, and run up to 1.8 GHz. The e6500 core also offers higher aggregate instructions per clock at lower power with an innovative “fused core” approach to threading. The e6500’s fully resourced dual threads provide 1.7 times the performance of a single thread.

The four e6500 dual-threaded cores share a low-latency backside 2 MB L2 cache, allowing efficient sharing of code and data. Each e6500 core implements the Freescale Altivec technology-based SIMD engine, dramatically boosting the performance of media and networking algorithms, offering native inline programming and using less power than a separate DSP.

Virtualization

The T2080 and T2081 processors include support for hardware-assisted virtualization. The e6500 core offers an extra core privilege level (hypervisor) and hardware offload of logical to real address translation. In addition, the T2080 and T2081 include platform-level enhancements such as SR-IOV and I/O virtualization with DMA memory protection through IOMMUs and configurable “storage profiles,” which provide isolation of I/O buffers between guest environments. Virtualization software for the T2080 and T2081 processors includes kernel virtualization model (KVM), Linux® containers and the Freescale hypervisor.

QorIQ T2080 Communications Processor

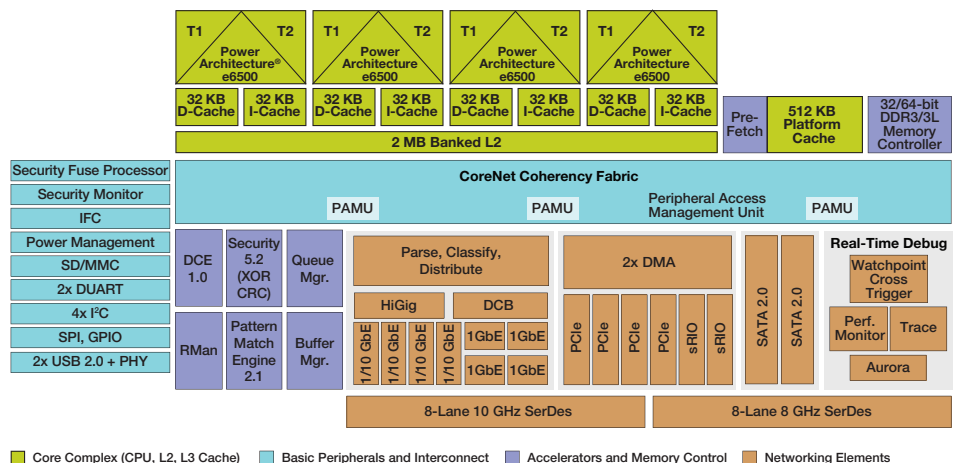

Data Path Acceleration Architecture (DPAA)

The T2080 and T2081 processors integrate the QorIQ DPAA, an innovative multicore infrastructure for scheduling work to cores (physical and virtual), hardware accelerators and network interfaces. The FMAN, a primary element of the DPAA, parses headers from incoming packets and classifies and selects data buffers with optional policing and congestion management. The FMAN passes its work to the QMAN, which assigns it to cores or accelerators with a multi-level scheduling hierarchy, while maintaining packet ordering. The BMAN manages allocation and de-allocation of packet buffers. The T2080 and T2081's implementation of DPAA offers accelerators for cryptography, deep packet inspection and compression/decompression.

Software and Tool Support

Freescale and our partner network deliver a wide range of tools, run-time software, reference solutions and services to accelerate your designs.

- QorIQ T2080 reference design board (T2080RDB)
- CodeWarrior Development Studio for Power Architecture
- Freescale Linux SDK
- VortiQa Application Software
 - VortiQa Application Identification Software (AIS)
 - Enterprise Software for Networking
 - VortiQa open network switch software
 - VortiQa open network director software
- Professional Services & Support
 - Commercial Services
 - Linux SDK Support Package
 - Reference Design Software (RDS) Support Package
- Third Party Software and Tools
 - Enea, Green Hills, Mentor Graphics and Wind River

T2080 vs. T2081 Differences

	T2080	T2081
SerDes	16	8
PCIe	2x Gen3 + 2x Gen2	1x Gen3 + 3x Gen2
SRIO	2 + RMan	No
SATA	2	No
Aurora	Yes	No
10 Gb/s MACs	Up to four, with XFI, XAUI, HiGig	Up to 2x XFI
1 Gb/s MACs	Up to eight	Up to seven
Package	25 x 25mm, 896 pins, 0.8 mm pitch	23 x 23mm, 780 pins, 0.8 mm pitch, pin compatible with T1042

T2080 and T2081 Features List

Four dual-threaded e6500 cores built on Power Architecture® technology	- Up to 1.8 GHz, 6.0 DMIPS/MHz per core - Shares a 2 MB L2 cache - Three levels of instructions: User, supervisor, hypervisor - Hybrid 32-bit mode to support legacy software and transition to a 64-bit architecture - Advanced power saving modes include state retention power gating
CoreNet platform cache	512 KB shared platform cache with prefetch engine
Hierarchical interconnect fabric	CoreNet fabric supporting coherent and non-coherent transactions with prioritization and bandwidth allocation amongst CoreNet endpoints
Memory controller	64-bit DDR3/3L SDRAM up to 2133 MT/s 72-bit width including ECC
DPAA incorporating acceleration for the following functions	- Packet parsing, classification and distribution to 24 Gb/s (FMAN) - Queue management for scheduling, packet sequencing and congestion management of up to 2²⁴ queues (QMAN) - Hardware buffer management for buffer allocation and de-allocation with 64 buffer pools (BMAN) - Cryptography acceleration to 10 Gb/s (SEC) - Decompression/compression acceleration at up to 17.5 Gb/s (DCE) - DPAA chip-to-chip interconnect via RapidIO® message manager (RMAN) (T2080 only) - Pattern matching acceleration to 10 Gb/s (PME)
SerDes	16 lanes at up to 10 GHz (8 on T2081)
Ethernet interfaces	- Quality of service: Egress traffic shaping and priority flow control for data center bridging in converged data center applications 8 MACs (7 on T2081), multiplexed over the following options: - Up to four 10 Gb/s MACs supporting XFI/KR, XAUI and HiGig (two on T2081 supporting XFI/KR only) - Up to eight 1 Gb/s MACs (5 on T2080) supporting SGMII - Up to two 2.5 Gb/s SGMII - Up to two RGMII
High-speed peripheral interfaces	- Two PCI Express 3.0 controllers (one on T2081) - Two PCI Express 2.0 controllers (three on T2081) - Endpoint SR-IOV - Two Serial RapidIO 2.1 controllers/ports running at up to 5 GHz with Type 11 messaging and Type 9 data streaming support (T2080 only)
Additional peripheral interfaces	- Two serial ATA (SATA 2.0) controllers (T2080 only) - Two High-Speed USB 2.0 controllers with integrated PHYs - Enhanced secure digital host controller (SD/MMC/eMMC) - Enhanced serial peripheral interface - Four I²C controllers - Four UARTS - Integrated flash controller supporting NAND and NOR flash memory
DMA	Dual eight channel
Support for hardware virtualization and partitioning enforcement	- Extra privileged level for hypervisor support - Logical to real address translation - Virtual core aware MMU/TLB - vMPIC (virtualized interrupt controller)/virtual core capable PPC cores - vDMA (user level DMA engine) - PAMU v2 (I/O MMU supporting paging) - DPAA (Ethernet MAC virtualization, accelerator virtualization)
QorIQ trust architecture	Secure boot, secure debug, tamper detection (T2080 only), volatile key storage, alternate image and key revocation

For more information, please visit freescale.com/QorIQ

Freescale, the Freescale logo, Altivec, CodeWarrior and QorIQ are trademarks of Freescale Semiconductor, Inc., Reg. U.S. Pat. & Tm Off. CoreNet is a trademark of Freescale Semiconductor, Inc. The Power Architecture and Power.org word marks and the Power and Power.org logos and related marks are trademarks and service marks licensed by Power.org. All other product or service names are the property of their respective owners. © 2014 Freescale Semiconductor, Inc.

Document Number: T2080FS REV 1





**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331