

### Features

- ◆ For industrial, office and residential environments
- ◆ Meets European ErP directive (green mode), <0.3 W no load power consumption
- ◆ High efficiency across full load range
- ◆ Compact plastic casing
- ◆ Reliable snap-on mounting on DIN-rails or with wall mounting bracket (not included)
- ◆ Universal input 85–264 VAC, 47–63 Hz
- ◆ Models with 5, 12, 24 & 48 VDC output
- ◆ Output voltage adjustable
- ◆ Power good signal
- ◆ Low ripple and noise
- ◆ Overload and short-circuit protection
- ◆ Optional module for parallel and redundant operation
- ◆ Worldwide safety approval package
- ◆ 3-year product warranty



The TRACOPOWER TPC series is a family of lightweight DIN-rail power supplies with an excellent price/performance ratio. They consume sparse standby power, and operate with high efficiency to comply with the requirements of the European Ecodesign directive. They have universal input of 85-264VAC or 90-375VDC and are designed for class I operation in industrial and residential environments. With the optional active current sharing redundancy module, these power supplies provide a very reliable true redundant DC supply. For further details see page 3.

### Models

| Order Code  | Input Voltage Ranges                                            | Output Power max. | Output Voltage nominal / adj. range | Output Current max. |
|-------------|-----------------------------------------------------------------|-------------------|-------------------------------------|---------------------|
| TPC 030-105 | 85 – 264 VAC<br>Universal Input<br>47/63 Hz<br><br>90 – 375 VDC | 20 W              | 5.0 VDC / 5.0–6.0 VDC               | 4.0 A               |
| TPC 030-112 |                                                                 | 26 W              | 12 VDC / 12–15 VDC                  | 2.2 A               |
| TPC 030-124 |                                                                 | 30 W              | 24 VDC / 24–28.8 VDC                | 1.25 A              |
| TPC 030-148 |                                                                 | 30 W              | 48 VDC / 48–56 VDC                  | 0.6 A               |
| TPC 055-112 |                                                                 | 42 W              | 12 VDC / 12–15 VDC                  | 3.5 A               |
| TPC 055-124 |                                                                 | 55 W              | 24 VDC / 24–28.8 VDC                | 2.3 A               |
| TPC 055-148 |                                                                 | 55 W              | 48 VDC / 48–56 VDC                  | 1.15 A              |
| TPC 080-112 |                                                                 | 72 W              | 12 VDC / 12–15 VDC                  | 6.0 A               |
| TPC 080-124 |                                                                 | 80 W              | 24 VDC / 24–28.8 VDC                | 3.3 A               |
| TPC 080-148 |                                                                 | 80 W              | 48 VDC / 48–56 VDC                  | 1.7 A               |
| TPC 120-112 |                                                                 | 96 W              | 12 VDC / 12–15 VDC                  | 8.0 A               |
| TPC 120-124 |                                                                 | 120 W             | 24 VDC / 24–28.8 VDC                | 5.0 A               |
| TPC 120-148 |                                                                 | 120 W             | 48 VDC / 48–56 VDC                  | 2.5 A               |

## Input Specifications

|                                               |                           |                         |
|-----------------------------------------------|---------------------------|-------------------------|
| Input voltage range                           | – AC nominal rated        | 110 – 240 VAC, 50-60 Hz |
|                                               | – AC range (designed for) | 85 – 264 VAC, 47-63 Hz  |
|                                               | – DC nominal rated        | 130 – 300 VDC           |
|                                               | – DC range (designed for) | 90 – 375 VDC            |
| Output derating                               | – at operation <100 VAC   | -2.5% /V                |
|                                               | – at operation <130 VDC   | -1.0% /VDC              |
| Standby power consumption                     | TPC 030 and 055 models:   | < 0.3 W                 |
|                                               | TPC 080 and 120 models:   | < 0.5 W                 |
| Harmonic limits                               |                           | EN 61000-3-2, Class A   |
| Recommended circuit breaker, characteristic C |                           | 6.0 – 16.0 A            |

## Output Specifications

|                                                                  |                                   |                           |
|------------------------------------------------------------------|-----------------------------------|---------------------------|
| Output voltage adjustable range<br>(potentiometer on frontpanel) | 5 VDC model:                      | 5.0 – 6.0 VDC             |
|                                                                  | 12 VDC models:                    | 12 – 15 VDC               |
|                                                                  | 24 VDC models:                    | 24 – 28.8 VDC             |
|                                                                  | 48 VDC models:                    | 48 – 56 VDC               |
| Regulation                                                       | – Input variation                 | 0.5 % max.                |
|                                                                  | – Load variation (0–100 %)        | 5 VDC models: 0.75 % max. |
|                                                                  |                                   | other models: 0.5 % max.  |
| Ripple and noise (20MHz bandwidth)                               |                                   | 100 mVpk-pk max.          |
| Short circuit protection                                         |                                   | <200 % of lout nom.       |
| Overvoltage protection (% of max. adjustable voltage)            | 5 VDC model:                      | <180 %                    |
|                                                                  | 12 VDC models:                    | <170 %                    |
|                                                                  | 24 VDC models:                    | <160 %                    |
|                                                                  | 48 VDC models:                    | <107 %                    |
| Power back immunity                                              |                                   | 125 % of nominal Vout     |
| Start-up time                                                    |                                   | 2 sec. max.               |
| Hold-up time (115 VAC / 230 VAC)                                 |                                   | min. 15 ms / min. 40 ms   |
| Power OK signal                                                  | – trigger                         | 80 – 95 %                 |
|                                                                  | – PNP open collector max. current | 48 VDC models: 5 mA       |
|                                                                  |                                   | other models: 10 mA       |

## General Specifications

|                                                                  |                           |                                                                                      |
|------------------------------------------------------------------|---------------------------|--------------------------------------------------------------------------------------|
| Temperature ranges                                               | – Operating               | –25°C to +70°C max.                                                                  |
|                                                                  | – Storage (non operating) | –25°C to +85°C                                                                       |
| Temperature derating                                             |                           | 2.5 %/K above 50°C                                                                   |
| Humidity (non condensing)                                        |                           | 95 % rel. H max.                                                                     |
| Temperature coefficient                                          |                           | 0.02 %/K                                                                             |
| Remote On/Off                                                    |                           | 10 mA current source                                                                 |
|                                                                  | – application document    | <a href="http://www.tracopower.com/overview/tpc">www.tracopower.com/overview/tpc</a> |
| Efficiency (average at power consumption 25-100%)                | TPC 030-105:              | 79 %                                                                                 |
|                                                                  | other 30 Watt models:     | 84 %                                                                                 |
|                                                                  | other models:             | 87 %                                                                                 |
| Reliability, calculated MTBF at +25°C<br>(according to IEC-1709) | TPC 030 models:           | >2.2 Mio h                                                                           |
|                                                                  | TPC 055 models:           | >1.7 Mio h                                                                           |
|                                                                  | TPC 080 models:           | >1.5 Mio h                                                                           |
|                                                                  | TPC 120 models:           | >1.3 Mio h                                                                           |
|                                                                  | – MTBF documents          | <a href="http://www.tracopower.com/overview/tpc">www.tracopower.com/overview/tpc</a> |
| Altitude during operation                                        |                           | 2'000m max. (6'500 ft) approved                                                      |

## General Specifications

|                           |                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Safety approvals          | <ul style="list-style-type: none"> <li>– CB test certificate</li> <li>– SIQ type approved</li> <li>– CSA certificate of compliance</li> <li>– UL certificate of compliance</li> <li>– SIQ type approved</li> <li>– certification documents</li> </ul> | IEC 60950-1:2005 2nd Ed, Am 1:2009<br>EN 60950-1 :2006 + Am 1 :2010 +<br>Am 11 :2009 + Am 12:2011<br>UL 60950-1-2nd Ed<br>CSA 60950-1-07-2nd Ed<br>UL 508, CSA C22.2 No.107.1-01<br>EN 60204-1:2006 + A1:2009,<br>EN 61558-2-8:2010, EN 61558-2-16:2009,<br>EN 50178:1997<br><a href="http://www.tracopower.com/overview/tpc">www.tracopower.com/overview/tpc</a> |
| Environmental compliance  | <ul style="list-style-type: none"> <li>– Reach declaration document</li> <li>– RoHS</li> </ul>                                                                                                                                                        | <a href="http://www.tracopower.com/overview/tpc">www.tracopower.com/overview/tpc</a><br>RoHS directive 2011/65/EU                                                                                                                                                                                                                                                 |
| EMC                       | <ul style="list-style-type: none"> <li>– emissions</li> <li>– immunity</li> <li>– EMC test report documents</li> </ul>                                                                                                                                | IEC 61000-6-3 (residential environment)<br>IEC 61000-6-2 (industrial environment)<br>SEMI F47<br><a href="http://www.tracopower.com/overview/tpc">www.tracopower.com/overview/tpc</a>                                                                                                                                                                             |
| Class of protection       |                                                                                                                                                                                                                                                       | class I (earth connection needed)                                                                                                                                                                                                                                                                                                                                 |
| Case protection           |                                                                                                                                                                                                                                                       | IP 20 (IEC 60529)                                                                                                                                                                                                                                                                                                                                                 |
| Enclosure material        |                                                                                                                                                                                                                                                       | Makrolon 2405 (UL 94V-0 rated)                                                                                                                                                                                                                                                                                                                                    |
| Mounting                  |                                                                                                                                                                                                                                                       | DIN-rails as per EN 50022-35x15/7.5<br>(snap-on with self-locking spring)<br>wall mounting bracket optional (not included)                                                                                                                                                                                                                                        |
| Installation instructions | – installation document                                                                                                                                                                                                                               | <a href="http://www.tracopower.com/overview/tpc">www.tracopower.com/overview/tpc</a>                                                                                                                                                                                                                                                                              |

## TPC-REM240-24 Redundancy Module

| Order Code    | Nominal Input Voltage | Max Power per Input | Output Voltage adjustable | Output Current max. |
|---------------|-----------------------|---------------------|---------------------------|---------------------|
| TPC-REM240-24 | 24 VDC                | 120 W               | 24 – 27 VDC               | 10 A                |
| TPC-REM240-48 | 48 VDC                |                     | 48 – 55 VDC               | 5 A                 |

These modules are external units for operation with two TPC power supplies with output voltage of 24 VDC or 48 VDC and of same type and power. The modules allow to connect two outputs of TPC power supplies together in order to achieve a reliable DC supply. In normal operation the module achieves equal current share for both power supplies connected. During the redundancy operation, if one of the power supplies fails, the output power will be provided in full by the remaining operating power supply. The redundancy of the DC system is monitored by a DC-OK signal.



## Specifications



|                               |                                                                                                                 |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------|
| Operating temperature         | –25°C to +50°C max.                                                                                             |
| Electromagnetic compatibility | in correspondence to connected units<br>(no internal switching device)                                          |
| Dimensions                    | same as model TPC 055 (see page 4)                                                                              |
| Connection                    | screw terminal block                                                                                            |
| Installation instructions     | – installation document<br><a href="http://www.tracopower.com/overview/tpc">www.tracopower.com/overview/tpc</a> |

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

## Case Dimensions

| Model          | Width (W)   | Height    | Depth d      | Weight |
|----------------|-------------|-----------|--------------|--------|
| TPC 030        | 26.5 (1.04) | 90 (3.54) | 96.5 (3.80)  | 160 g  |
| TPC 055        | 45.0 (1.77) | 90 (3.54) | 96.5 (3.80)  | 260 g  |
| TPC-REM 240-24 | 45.0 (1.77) | 90 (3.54) | 96.5 (3.80)  | 160 g  |
| TPC 080        | 63.0 (2.48) | 90 (3.54) | 96.5 (3.80)  | 360 g  |
| TPC 120        | 72.0 (2.83) | 90 (3.54) | 110.0 (4.33) | 440 g  |

Dimensions in [mm], ( ) = Inch  
 Tolerances:  $\pm 0.5$  mm ( $\pm 0.02$ )

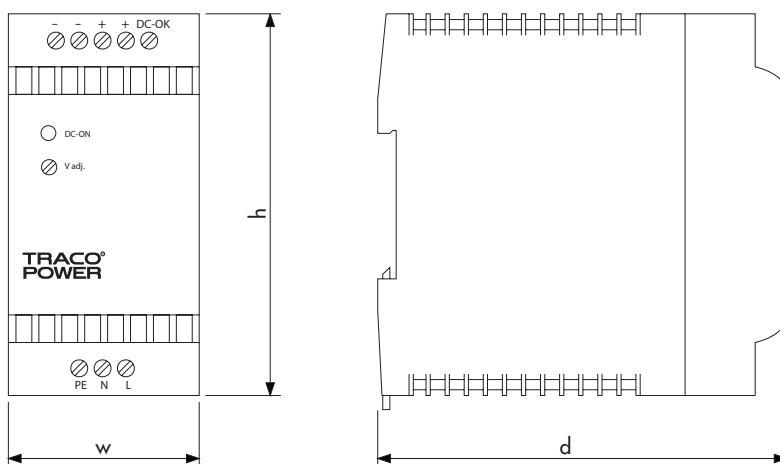

Snap-on bracket for wall mounting (black plastic)

### Wall Mounting Bracket (accessories not included)

| Order Code | For Models                    | Dimensions      |
|------------|-------------------------------|-----------------|
| TPC-WMK1   | TPC 030-xx                    | 26.0 x 35 x 7.5 |
| TPC-WMK2   | TPC 055-xx,<br>TPC-REM 240-24 | 42.7 x 35 x 7.5 |
| TPC-WMK3   | TPC 080-xx                    | 60.7 x 35 x 7.5 |
| TPC-WMK4   | TPC 120-xx                    | 69.7 x 35 x 7.5 |

3D step files to download at: [www.tracopower.com/overview/tpc](http://www.tracopower.com/overview/tpc) -> documents



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331