




SpiFlash® Memories with SPI, Dual-SPI, Quad-SPI and QPI

Winbond's W25X and W25Q SpiFlash® Multi-I/O Memories feature the popular Serial Peripheral Interface (SPI), densities from 512K-bit to 256M-bit, small erasable sectors and the industry's highest performance. The W25X family supports Dual-SPI effectively doubling standard SPI clock rates. The W25Q family is a "superset" of the 25X family with Dual-I/O and Quad-I/O SPI for even higher performance. Clock rates up to 104MHz achieve an equivalent of 416MHz (50M-Byte/S transfer rate) when using Quad-SPI. This even surpasses asynchronous Parallel Flash memories while using fewer pins and less space. Faster transfer rates mean controllers can execute code (XIP) directly from the SPI interface or further improve boot time when shadowing code to RAM. Some SpiFlash devices offer the new Quad Peripheral Interface (QPI) supporting true Quad Commands for improved XIP performance and simpler controller circuitry. Additionally, new ultra-small form-factor packages are ideal for space constrained mobile and handheld applications.

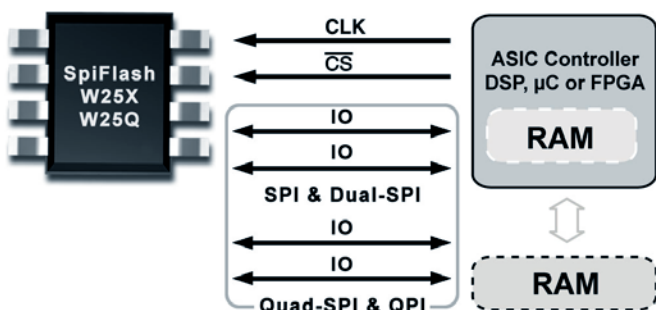

W25X SpiFlash Family

- 512K-bit to 4M-bit
- Serial Peripheral Interface (SPI), Dual Output SPI
- Uniform 4KB, 32KB & 64KB erase

W25Q SpiFlash Family

- 2M-bit to 256M-bit, superset compatible with 25X
- SPI, Dual-SPI, Quad-SPI and QPI (for many devices)
- Uniform 4KB, 32KB & 64KB erase
- Erase and Program Suspend/Resume
- Quad Page Program
- Security: Lock-down, ID#, OTP Registers
- Serial Flash Discoverable Parameters (SFDP)

High Performance

- 104MHz Clock, 416MHz Quad-SPI (50MB/S)
- Fast-boot or execute code (XIP) from SPI

Voltage & Package Options

- 3V (2.7~3.6V), 2.5V (2.3~3.6V) and 1.8V (1.65~1.95V)
- Space saving packages: 8-pin SOIC, WSON, VSOP, USON, WLBGA (CSP), 16-pin SOIC, 24-ball TFBGA
- Known Good Die (KGD) Wafers

Wide Range of Applications

- PCs, DVD, BluRay, WLAN, DSL/Cable Modem, Printers,
- Hard Drives, Set Top Box, LCD-TV, Mobile Phones,
- Bluetooth, GPS, MP3, Meters, DSP, FPGAs and more

Refer to Winbond Automotive SpiFlash Memory Selection Guide for details of Automotive products.

Winbond also offers the W29GL family of Parallel Flash products from 32Mb through 512Mb densities compatible to industry standard x29GL products.

winbond

Winbond Industrial SpiFlash Memory Selection Guide ¹

Density	Winbond Part # ²	Quad SPI	Clock MHz	Features ³	Voltage	Package ⁴	Sample Availability
512M-bit	W25M512JVxIG/Q	•	104	QPI, Enhanced, DTR	3V	x=(F,E,C ⁶ ,B ⁶)	Q4-2014
256M-bit	W25Q256FVxIG/Q/F	•	80/104	QPI, Enhanced	3V	x=(F,E,C ⁶ ,B ⁶)	Now
	W25Q257FVxIG/Q ⁵	•	80/104	QPI, Enhanced	3V	x=(F,E)	Q1-2014
	W25Q256JVxIG/Q	•	80/104	QPI, Enhanced, DTR	3V	x=(F,E,C ⁶ ,B ⁶)	Q4-2014
128M-bit	W25Q128FVxIG/Q/F	•	104	QPI, Enhanced	3V	x=(S,T ⁶ ,F,P,E,C ⁶ ,B ⁶)	Now
	W25R128FVxIQ	•	104	RPMC, Enhanced	3V	x=(S,T ⁶ ,F ⁶ ,P ⁶)	Now
	W25Q128JVxIG/Q	•	104	QPI, Enhanced, DTR	3V	x=(S,T ⁶ ,F,P,E,C ⁶ ,B ⁶)	Q4-2014
	W25Q128FWxIG	•	104	QPI, Enhanced	1.8V	x=(S,T ⁶ ,F ⁶ ,P)	Now
64M-bit	W25Q64FVxIG/Q/F	•	104	QPI, Enhanced	3V	xx=(SS,ST ⁶ ,SF,ZP,ZE,TC,TB ⁶)	Now
	W25R64FVxIQ	•	104	RPMC, Enhanced	3V	xx=(SS,ST ⁶ ,SF ⁶ ,ZP ⁶)	Now
	W25Q64JVxIG/Q	•	104	QPI, Enhanced, DTR	3V	xx=(SS,ST ⁶ ,SF,ZP,ZE,TC,TB ⁶)	Q3-2014
	W25Q64FWxIG	•	104	QPI, Enhanced	1.8V	xx=(SS,ST ⁶ ,SF ⁶ ,ZP,BY)	Now
32M-bit	W25Q32FVxIG/Q/F	•	104	QPI, Enhanced	3V	xx=(SS,ST ⁶ ,SF,ZP,ZE,TC ⁶ ,TB ⁶)	Now
	W25Q32JVxIG/Q	•	104	QPI, Enhanced, DTR	3V	xx=(SS,ST ⁶ ,SF,ZP,ZE,TC ⁶ ,TB ⁶)	Q3-2014
	W25Q32DWxIG	•	104	QPI, Enhanced	1.8V	xx=(SS,ST ⁶ ,SF ⁶ ,ZP,ZE ⁶)	Now
	W25Q32FWxIG	•	104	QPI, Enhanced	1.8V	xx=(SS,ST ⁶ ,SF ⁶ ,ZP,ZE ⁶ ,XG)	Q1-2014
16M-bit	W25Q16DVxIG/Q	•	80/104	Enhanced	3V	xx=(SN,SV ⁶ ,SS,ST ⁶ ,ZP,TC ⁶ ,TB ⁶)	Now
	W25Q16CLxIG	•	50/80	Enhanced	2.5V/3V	xx=(SN,SV ⁶ ,SS,ZP)	Now
	W25Q16DWxIG	•	104	QPI, Enhanced	1.8V	xx=(SN,SV ⁶ ,SS,ST ⁶ ,SF ⁶ ,ZP,TC ⁶ ,TB ⁶ ,UU,BY ⁶)	Now
	W25Q16FWxIG	•	104	QPI, Enhanced	1.8V	xx=(SN,SV ⁶ ,SS,ST ⁶ ,SF ⁶ ,ZP,TC ⁶ ,TB ⁶ ,UU,BY ⁶)	Q3-2014
8M-bit	W25Q80BVxIG	•	80/104	Fast Write, Enhanced	3V	xx=(SN,SS,ZP,UX)	Use W25Q80DV
	W25Q80DVxIG	•	80/104	Fast Write, Enhanced	3V	xx=(SN,SV,SS,ZP,UX)	Now
	W25Q80BLxIG	•	50/80	Fast Write, Enhanced	2.5V	xx=(SN,SV,SS,ZP,UX)	Now
	W25Q80DLxIG	•	80/104	Fast Write, Enhanced	2.5V	xx=(SN,SV,SS,ZP,UX)	Q2-2014
	W25Q80BWxIG ⁷	•	80	Fast Write, Enhanced	1.8V	xx=(SN,SV,SS,ZP,UU ⁶ ,BY ⁶)	Now
	W25Q80EWxIG	•	80	Fast Write, Enhanced	1.8V	xx=(SN,SV,SS,ZP,UU ⁶ ,BY ⁶)	Q4-2014
4M-bit	W25X40CLxIG		80/104	Fast Write	2.5V/3V	xx=(SN,SV,SS,ZP,UX)	Now
	W25Q40CLxIG	•	104	Fast Write, Enhanced	2.5V/3V	xx=(SN,SS,UX ⁶)	Now
	W25Q40BWxIG	•	80	Fast Write, Enhanced	1.8V	xx=(SN,SV,SS ⁶ ,ZP,UX,UU ⁶)	Now
	W25Q40EWxIG	•	80	Fast Write, Enhanced	1.8V	xx=(SN,SV,SS ⁶ ,ZP,UX,UU ⁶)	Q4-2014
2M-bit	W25X20CLxIG		80/104	Fast Write	2.5V/3V	xx=(SN,SV,ZP,UX)	Now
	W25Q20CLxIG	•	80/104	Fast Write	2.5V/3V	xx=(SN,SV,ZP,UX)	Now
	W25Q20BWxIG	•	80	Fast Write, Enhanced	1.8V	xx=(SN,SV,ZP,UX ⁶)	Now
	W25Q20EWxIG	•	80	Fast Write, Enhanced	1.8V	xx=(SN,SV,ZP,UX ⁶)	Q2-2014
1M-bit	W25X10CLxIG		80/104	Fast Write	2.5V/3V	xx=(SN,SV ⁶ ,ZP ⁶ ,UX)	Now
	W25Q10EWxIG	•	80/104	Fast Write, Enhanced	1.8V	xx=(SN,SV ⁶ ,ZP ⁶ ,UX)	Q2-2014
512K-bit	W25X05CLxIG		80/104	Fast Write	2.5V/3V	xx=(SN,SD ⁶ ,UX)	Now

1. See data sheet for further technical information. This is subject to change without notice. 2. At the end of the part number, letter "G" represents "Green", Halogen Free and RoHS compliant packaging; letter "Q" represents Green packaging and Quad Enabled as shipping default & fast sector erase time (tSE); letter "F" represents Fast Sector Erase time (tSE); letter "I" represents Industrial Temperature (-40°C to +85°C). 3. Enhanced=SFDP¹, Security Registers, Program/Erase Suspend/Resume, Burst Read with Wrap, Non-Volatile & Volatile Status Registers, Complement Array Protection. 4. SN=SO8 150mil, SV=VSOP8 150mil, SS or S=SO8 208mil, ST or T=VSOP8 208mil, SF or F=SO16 300mil, SD=TSSOP8 173mil, ZP or P=WSOP8 6x5mm, ZE or E=WSOP8 8x6mm, TC or C=TFBGA24 8x6mm (4x6 Matrix), TB or B=TFBGA24 8x6mm (5x5 Matrix), UX=USON8 2x3mm, UU=USON8 4x3mm, XG=XSON8 4x4mm, BY=WLPGA. KGD Wafer available. 5. Default 4-byte addressing for W25W257FV. 6. Special Order. 7. Contact Winbond for Suspend/Resume feature support on W25Q80BW.



Winbond Electronics Corporation (Headquarters)

No. 8, Keya Rd. I, Central Taiwan Science Park
Taichung County, 428, Taiwan, R.O.C.
Tel: 886-4-25218168

www.winbond.com

Winbond Electronics Corporation America

2727 North First Street, San Jose, CA 95134 USA
Tel: 1-408-943-6666 Fax: 1-408-544-1798



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331