


## Standard 1 A Triacs

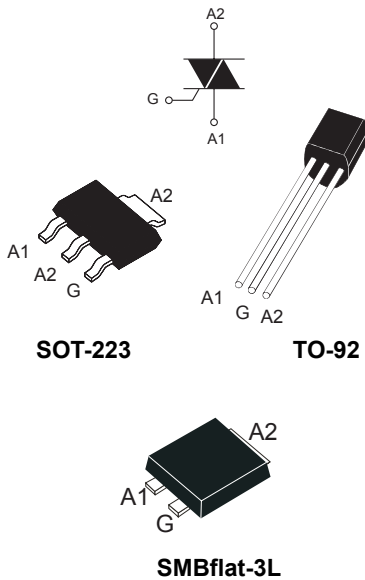

### Features

- On-state rms current,  $I_{T(RMS)}$  1 A
- Repetitive peak off-state voltage,  $V_{DRM}/V_{RRM}$  600 or 800 V
- Triggering gate current,  $I_{GT}$  (Q1) 3 to 25 mA

### Applications

- AC switching
- Home appliances

### Description

The **Z01** series is suitable for general purpose AC switching applications. These devices are typically used in applications such as home appliances (electrovalve, pump, door lock, small lamp control), fan speed controllers,...

Different gate current sensitivities are available, allowing optimized performance when driven directly through microcontroller.

#### Product status link

[Z01](#)

#### Product summary

|                   |            |
|-------------------|------------|
| $I_{T(RMS)}$      | 1 A        |
| $V_{DRM}/V_{RRM}$ | 600, 800 V |
| $I_{GTstandard}$  | 3 to 25 mA |

## 1 Characteristics

Table 1. Absolute maximum ratings

| Symbol       | Parameters                                                                                                | Value                                                                | Unit                              |
|--------------|-----------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|-----------------------------------|
| $I_{T(RMS)}$ | RMS on-state current (full sine wave)                                                                     | SOT-223<br>$T_{tab} = 90\text{ }^{\circ}\text{C}$                    | 1<br>A                            |
|              |                                                                                                           | TO-92<br>$T_L = 50\text{ }^{\circ}\text{C}$                          |                                   |
|              |                                                                                                           | SMBflat-3L<br>$T_{tab} = 107\text{ }^{\circ}\text{C}$                |                                   |
| $I_{TSM}$    | Non repetitive surge peak on-state current<br>(full cycle, $T_j$ initial = $25\text{ }^{\circ}\text{C}$ ) | $F = 50\text{ Hz}$<br>$t_p = 20\text{ ms}$                           | 8<br>A                            |
|              |                                                                                                           | $F = 60\text{ Hz}$<br>$t_p = 16.7\text{ ms}$                         | 8.5                               |
| $I^2t$       | $I^2t$ value for fusing                                                                                   | $t_p = 10\text{ ms}$                                                 | 0.35<br>$\text{A}^2\text{s}$      |
| $di/dt$      | Critical rate of rise of on-state current<br>$I_G = 2 \times I_{GT}$ , $t_r \leq 100\text{ ns}$           | $F = 120\text{ Hz}$<br>$T_j = 125\text{ }^{\circ}\text{C}$           | 20<br>$\text{A}/\mu\text{s}$      |
| $I_{GM}$     | Peak gate current                                                                                         | $t_p = 20\text{ }\mu\text{s}$<br>$T_j = 125\text{ }^{\circ}\text{C}$ | 1<br>A                            |
| $P_{G(AV)}$  | Average gate power dissipation                                                                            | $T_j = 125\text{ }^{\circ}\text{C}$                                  | 1<br>W                            |
| $T_{stg}$    | Storage junction temperature range                                                                        |                                                                      | -40 to +150<br>$^{\circ}\text{C}$ |
| $T_j$        | Operating junction temperature range                                                                      |                                                                      | -40 to +125<br>$^{\circ}\text{C}$ |

Table 2. Electrical characteristics ( $T_j = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified)

| Symbol                              | Parameters                                                                           | Quadrant     |      | Value |    |    |     | Unit |
|-------------------------------------|--------------------------------------------------------------------------------------|--------------|------|-------|----|----|-----|------|
|                                     |                                                                                      |              |      | Z01   |    |    |     |      |
|                                     |                                                                                      |              |      | 03    | 07 | 09 | 10  |      |
| I <sub>GT</sub> <sup>(1)</sup>      | V <sub>D</sub> = 12 V, R <sub>L</sub> = 30 Ω                                         | I - II - III | Max. | 3     | 5  | 10 | 25  | mA   |
|                                     |                                                                                      | IV           |      | 5     | 7  | 10 | 25  |      |
| V <sub>GT</sub>                     |                                                                                      | All          | Max. | 1.3   |    |    |     | V    |
| V <sub>GD</sub>                     | V <sub>D</sub> = V <sub>DRM</sub> , R <sub>L</sub> = 3.3 kΩ, T <sub>j</sub> = 125 °C | All          | Min. | 0.2   |    |    |     | V    |
| I <sub>H</sub> <sup>(2)</sup>       | I <sub>T</sub> = 50 mA                                                               |              | Max. | 7     | 10 | 10 | 25  | mA   |
| I <sub>L</sub>                      | I <sub>G</sub> = 1.2 I <sub>GT</sub>                                                 | I - III - IV | Max. | 7     | 10 | 15 | 25  | mA   |
|                                     |                                                                                      | II           | Max. | 15    | 20 | 25 | 50  |      |
| dV/dt <sup>(2)</sup>                | V <sub>D</sub> = 67 % V <sub>DRM</sub> gate open, T <sub>j</sub> = 110 °C            |              | Min. | 10    | 20 | 50 | 100 | V/μs |
| (dV/dt) <sub>c</sub> <sup>(2)</sup> | (dI/dt) <sub>c</sub> = 0.44 A/ms, T <sub>j</sub> = 110 °C                            |              | Min. | 0.5   | 1  | 2  | 5   | V/μs |

1. Minimum  $I_{GT}$  is guaranteed at 5 % of  $I_{GT}$  max.

2. For both polarities of A2 referenced to A1

**Table 3. Static electrical characteristics**

| Symbol                 | Test conditions                                    | $T_j$  |      | Value | Unit |
|------------------------|----------------------------------------------------|--------|------|-------|------|
| $V_T^{(1)}$            | $I_{TM} = 1.4 \text{ A}$ , $t_p = 380 \mu\text{s}$ | 25 °C  | Max. | 1.60  | V    |
| $V_{TO}^{(1)}$         | Threshold on-state voltage                         | 125 °C | Max. | 0.95  | V    |
| $R_d$                  | Dynamic resistance                                 | 125 °C | Max. | 400   | mΩ   |
| $I_{DRM}$<br>$I_{RRM}$ | $V_{DRM} = V_{RRM}$                                | 25 °C  | Max. | 5     | μA   |
|                        |                                                    | 125 °C |      | 0.5   | mA   |

1. For both polarities of A2 referenced to A1


**Table 4. Thermal resistance**

| Symbol        | Parameters                                         |            | Max. value | Unit |
|---------------|----------------------------------------------------|------------|------------|------|
| $R_{th(j-t)}$ | Max. junction to tab (AC)                          | SOT-223    | 25         | °C/W |
|               |                                                    | SMBflat-3L | 14         |      |
| $R_{th(j-l)}$ | Max. junction to lead (AC)                         | TO-92      | 60         |      |
| $R_{th(j-a)}$ | Junction to ambient ( $S^{(1)} = 5 \text{ cm}^2$ ) | SOT-223    | 60         |      |
|               |                                                    | SMBflat-3L | 75         |      |
|               | Junction to ambient                                | TO-92      | 150        |      |


1. Copper surface under tab.

## 1.1 Characteristics (curves)


**Figure 1. Maximum power dissipation versus on-state RMS current (full cycle)**

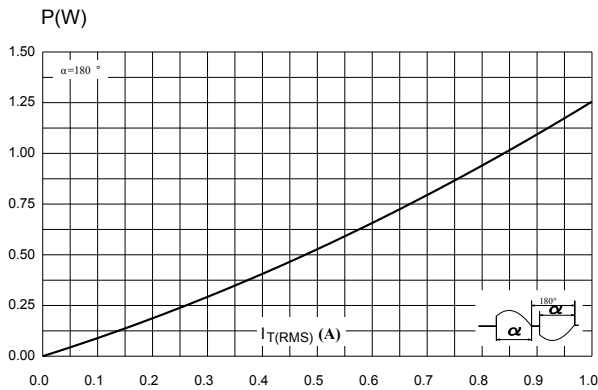


**Figure 2. RMS on-state current versus lead (TO-92) or tab (SOT-223, SMBflat-3L) temperature (full cycle)**

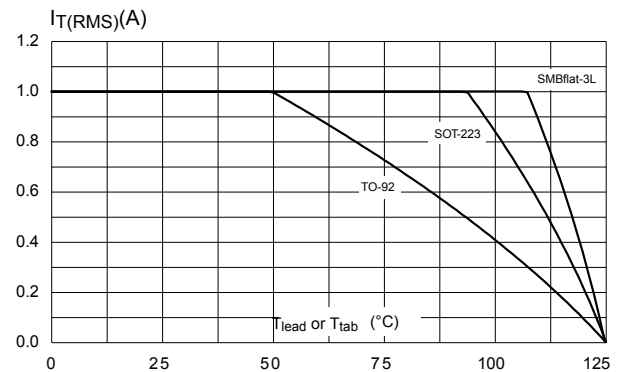


**Figure 3. On-state rms current versus ambient temperature (free air convection full cycle)**

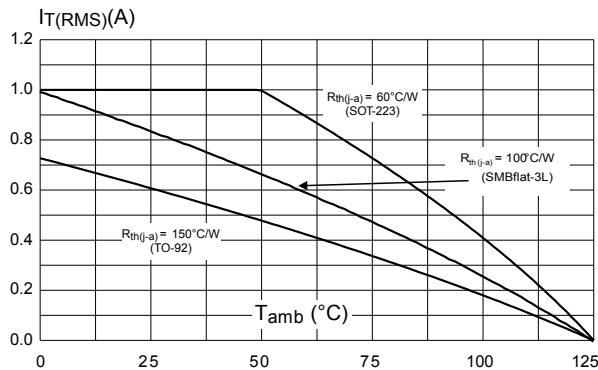


**Figure 4. Relative variation of thermal impedance versus pulse duration ( $Z_{th(j-a)}$ )**

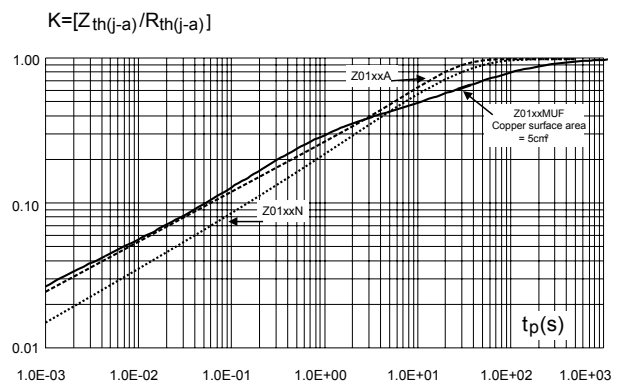


**Figure 5. Relative variation of holding current and latching current versus junction temperature (typ. values)**

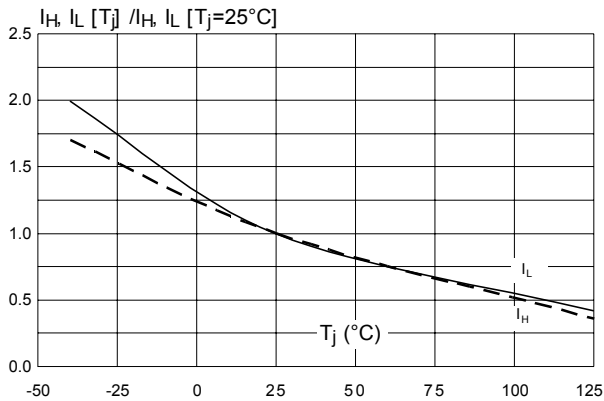


**Figure 6. Relative variation of gate trigger current ( $I_{GT}$ ) and voltage ( $V_{GT}$ ) versus junction temperature**

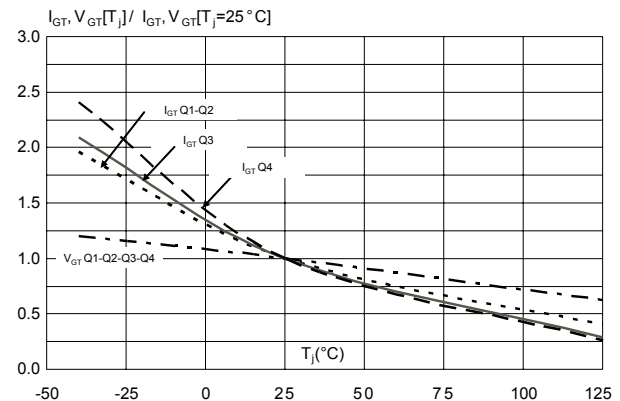


**Figure 7. Surge peak on-state current versus number of cycles**

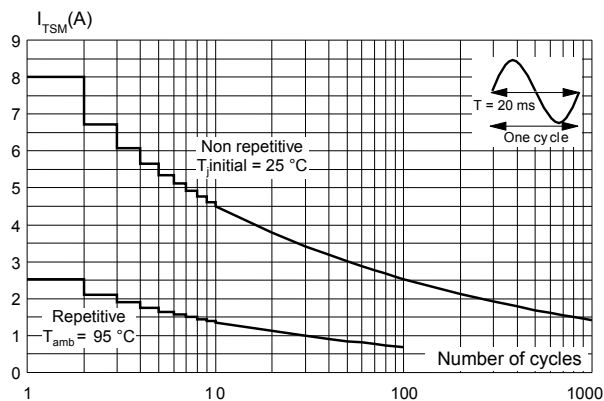


**Figure 8. Non-repetitive surge peak on-state current and corresponding value of  $I^2t$  sinusoidal pulse width**

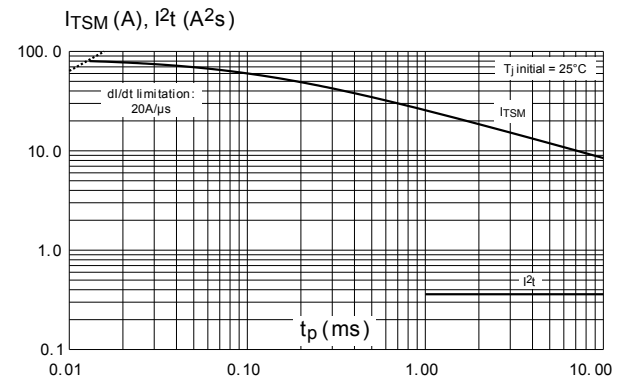


**Figure 9. On-state characteristics (maximum values) ( $I_{TM} = f(V_{TM})$ )**

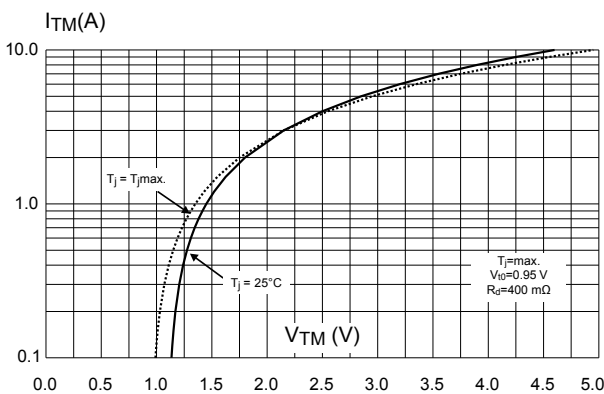


**Figure 10. Relative variation of critical rate of decrease of main current ( $dI/dt$ ) versus junction temperature**

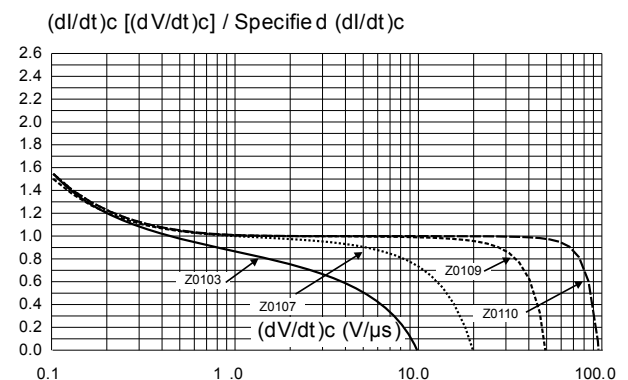


**Figure 11. Relative variation of critical rate of decrease of main current (dI/dt) versus junction temperature**

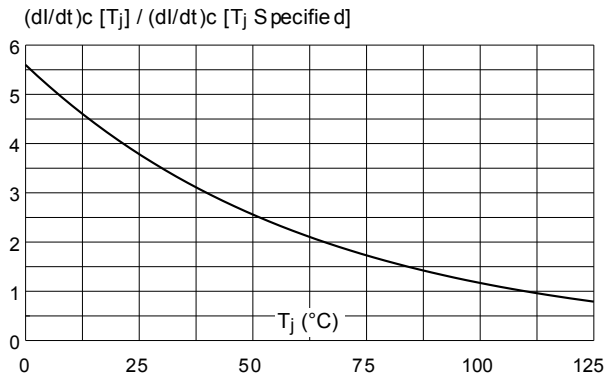

**Figure 12. SOT-223 and SMBflat-3L thermal resistance junction to ambient versus copper surface under case**

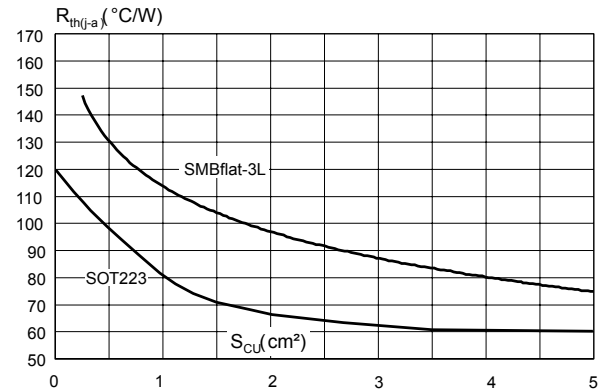

**Figure 13. Relative variation of static dV/dt immunity versus junction temperature (gate open)**

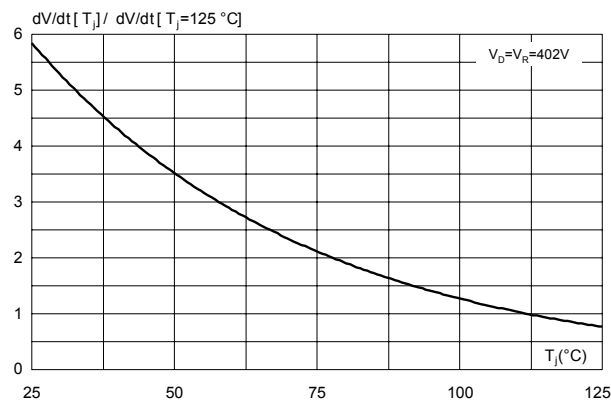


## 2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK is an ST trademark.

### 2.1 SOT-223 package information

- Epoxy meets UL94, V0
- Lead free plating + halogen-free molding resin


**Figure 14. SOT-223 package outline**

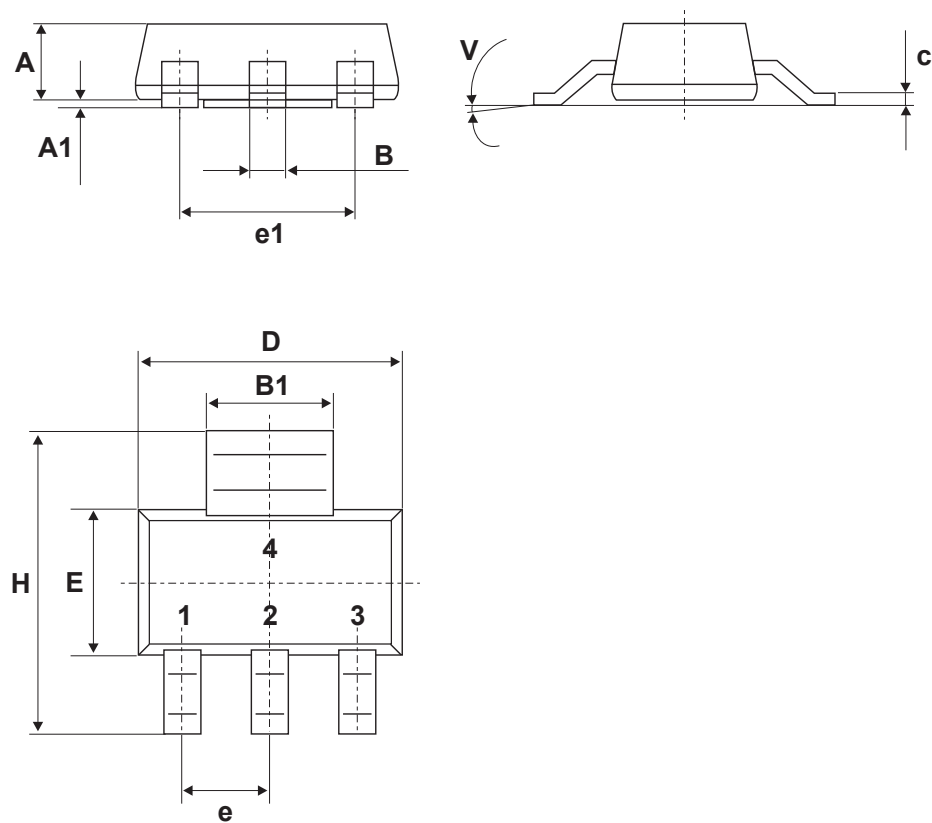

**Table 5. SOT-223 package mechanical data**

| Ref. | Dimensions  |      |      |                       |        |        |
|------|-------------|------|------|-----------------------|--------|--------|
|      | Millimeters |      |      | Inches <sup>(1)</sup> |        |        |
|      | Min.        | Typ. | Max. | Min.                  | Typ.   | Max.   |
| A    |             |      | 1.80 |                       |        | 0.0709 |
| A1   |             | 0.02 | 0.10 |                       | 0.0008 | 0.0039 |
| B    | 0.60        | 0.70 | 0.85 | 0.024                 | 0.0276 | 0.0335 |
| B1   | 2.90        | 3.00 | 3.15 | 0.114                 | 0.1181 | 0.1240 |
| c    | 0.24        | 0.26 | 0.35 | 0.009                 | 0.0102 | 0.0138 |
| D    | 6.30        | 6.50 | 6.70 | 0.248                 | 0.2559 | 0.2638 |
| e    |             | 2.3  |      |                       | 0.0906 |        |
| e1   |             | 4.6  |      |                       | 0.1811 |        |
| E    | 3.30        | 3.50 | 3.70 | 0.130                 | 0.1378 | 0.1457 |
| H    | 6.70        | 7.00 | 7.30 | 0.264                 | 0.2756 | 0.2874 |
| V    | 10° max.    |      |      |                       |        |        |

1. Inches only for reference

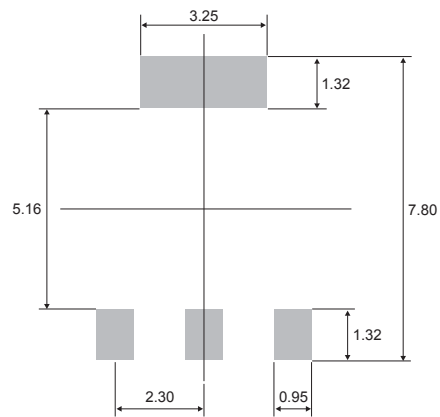
**Figure 15. SOT-223 footprint (dimensions in mm)**




## 2.2 TO-92 package information

- Epoxy meets UL94, V0
- Lead free plating + halogen-free molding resin

**Figure 16. TO-92 package outline**

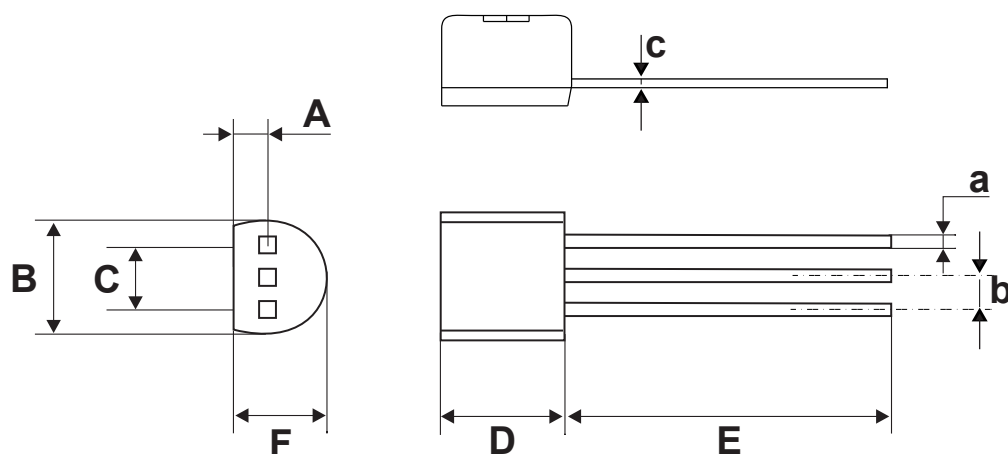

**Table 6. TO-92 package mechanical data**

| Ref. | Dimensions  |      |      |                       |        |        |
|------|-------------|------|------|-----------------------|--------|--------|
|      | Millimeters |      |      | Inches <sup>(1)</sup> |        |        |
|      | Min.        | Typ. | Max. | Min.                  | Typ.   | Max.   |
| A    |             | 1.35 |      |                       | 0.0531 |        |
| B    |             |      | 4.70 |                       |        | 0.1850 |
| C    |             | 2.54 |      |                       | 0.1000 |        |
| D    | 4.40        |      |      | 0.1732                |        |        |
| E    | 12.70       |      |      | 0.5000                |        |        |
| F    |             |      | 3.70 |                       |        | 0.1457 |
| a    |             |      | 0.50 |                       |        | 0.0197 |
| b    |             | 1.27 |      |                       | 0.500  |        |
| c    |             |      | 0.48 |                       |        | 0.0189 |

1. Inches dimensions given for information

## 2.3 SMBflat-3L package information

- Epoxy meets UL94, V0
- Lead-free package

Figure 17. SMBflat-3L package outline


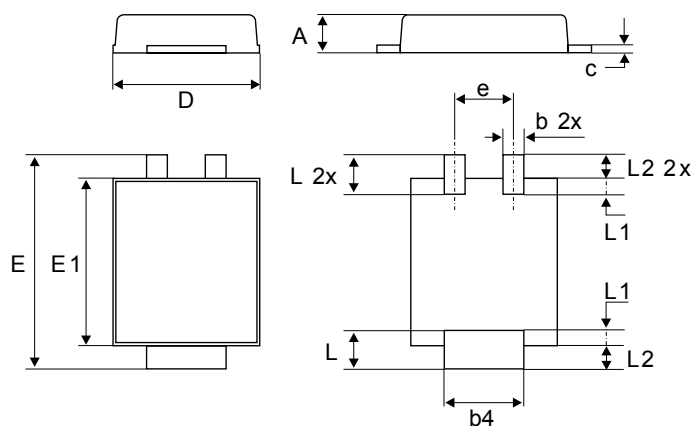



Table 7. SMBflat-3L mechanical data

| Ref. | Dimensions  |      |      |        |       |       |
|------|-------------|------|------|--------|-------|-------|
|      | Millimeters |      |      | Inches |       |       |
|      | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A    | 0.90        |      | 1.10 | 0.035  |       | 0.044 |
| b    | 0.35        |      | 0.65 | 0.014  |       | 0.026 |
| b4   | 1.95        |      | 2.20 | 0.070  |       | 0.087 |
| c    | 0.15        |      | 0.40 | 0.005  |       | 0.016 |
| D    | 3.30        |      | 3.95 | 0.129  |       | 0.156 |
| E    | 5.10        |      | 5.60 | 0.200  |       | 0.221 |
| E1   | 4.05        |      | 4.60 | 0.159  |       | 0.182 |
| L    | 0.75        |      | 1.50 | 0.029  |       | 0.060 |
| L1   |             | 0.40 |      |        | 0.016 |       |
| L2   |             | 0.60 |      |        | 0.024 |       |
| e    |             | 1.60 |      |        | 0.063 |       |

**Figure 18. Footprint recommendations, dimensions in mm (inches)**

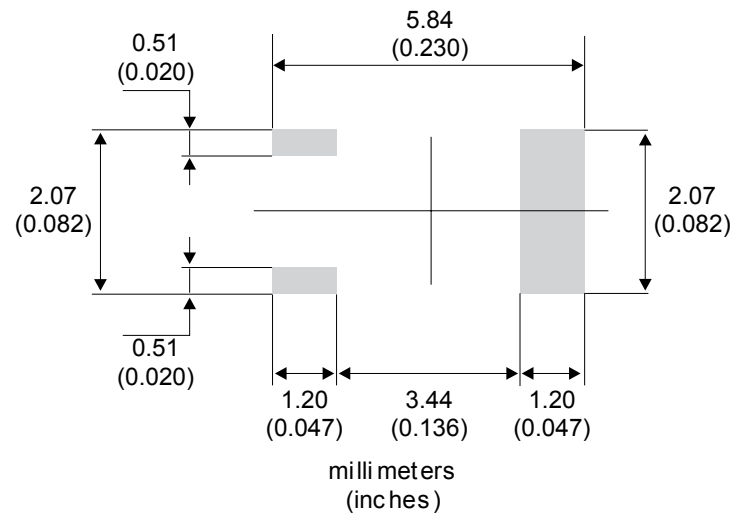


**Figure 19. Footprint and connectors for SOT-223 or SMBflat-3L (dimensions in mm)**

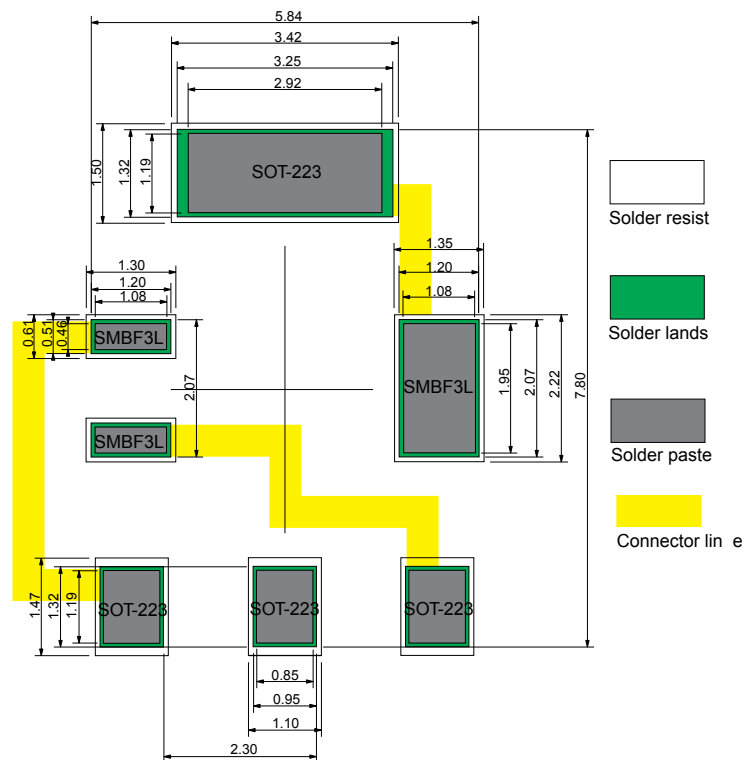

### 3 Ordering information

Figure 20. Ordering information scheme

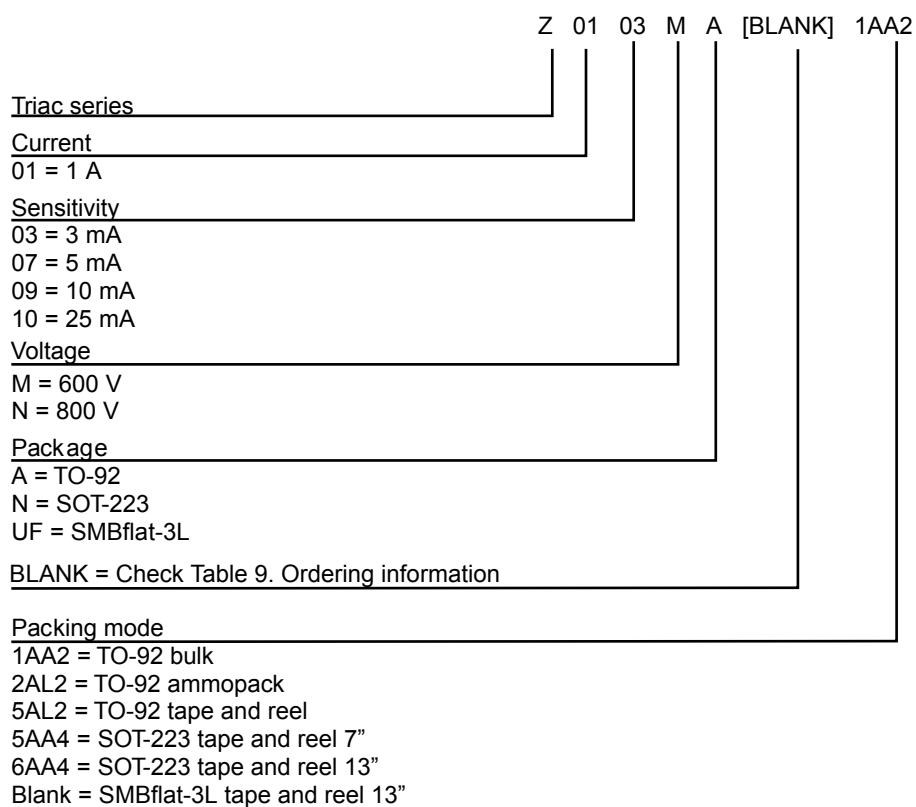

### 3.1 Product selector

**Table 8. Product selector**

| Part Number |         | Sensitivity | Type     | Package    |
|-------------|---------|-------------|----------|------------|
| 600         | 800     |             |          |            |
| Z0103MA     | Z0103NA | 3 mA        | Standard | TO-92      |
| Z0103MN     | Z0103NN |             |          | SOT-223    |
| Z0107MA     | Z0107NA | 5 mA        |          | TO-92      |
| Z0107MN     | Z0107NN |             |          | SOT-223    |
| Z0109MA     | Z0109NA | 10 mA       |          | TO-92      |
| Z0109MN     | Z0109NN |             |          | SOT-223    |
| Z0110MA     | Z0110NA | 25 mA       |          | TO-92      |
| Z0110MN     | Z0110NN |             |          | SOT-223    |
| Z0103MUF    |         | 3 mA        |          | SMBflat-3L |
| Z0107MUF    |         | 5 mA        |          |            |
| Z0109MUF    |         | 10 mA       |          |            |

## 3.2 Ordering information

**Table 9. Ordering information**

| Order code <sup>(1)</sup> | Marking <sup>(1)</sup> | Package    | Weight   | Base qty. | Delivery mode |
|---------------------------|------------------------|------------|----------|-----------|---------------|
| Z01xxyA 1AA2              | Z01xxyA                | TO-92      | 0.2 g    | 2500      | Bulk          |
| Z01xxyA 2AL2              |                        |            |          | 2000      | Ammopack      |
| Z01xxyA 5AL2              |                        |            |          | 2000      | Tape and reel |
| Z0103yN 5AA4              | Z3y                    | SOT-223    | 0.12 g   | 1000      |               |
| Z0103MN 6AA4              | Z3M                    |            |          | 4000      |               |
| Z0107yN 5AA4              | Z7y                    |            |          | 1000      |               |
| Z0107MN 6AA4              | Z7M                    |            |          | 4000      |               |
| Z0109yN 5AA4              | Z9y                    |            |          | 1000      |               |
| Z0109NN6AA4               | Z9N                    |            |          | 4000      |               |
| Z0103MUF                  | Z3M                    | SMBflat-3L | 46.78 mg | 5000      |               |
| Z0107MUF                  | Z7M                    |            |          | 5000      |               |
| Z0109MUF                  | Z9M                    |            |          | 5000      |               |

1. xx = sensitive, y = voltage, and check [Figure 20. Ordering information scheme](#).

## Revision history

**Table 10. Document revision history**

| Date        | Revision | Changes                                                                                                                        |
|-------------|----------|--------------------------------------------------------------------------------------------------------------------------------|
| Oct-2001    | 4        | Last update.                                                                                                                   |
| 10-Feb-2005 | 5        | Package: TO-92 tape and reel delivery mode 5AL2 added.                                                                         |
| 09-May-2005 | 6        | Table 4 on page 2: typo. mistake corrected<br>1. (dV/dt)c instead of (dI/dt)c<br>2. V/μs unit instead of A/ms                  |
| 21-Apr-2006 | 7        | Reformatted to current standard. Table 2 on page 2: Typo corrected. Values for IGT split into two separate rows.               |
| 10-Oct-2010 | 8        | Table 2: modified test conditions for (dV/dt)c. Changed “ambient” to “lead or tab” in Figure 2.                                |
| 20-Oct-2010 | 9        | Package: SOT-223 13” tape and reel added = 6AA4.                                                                               |
| 14-Dec-2010 | 10       | Added package SMBflat-3L. Updated dimensions in Table 6.<br>Updated Figure 3 and Figure 12. Updated Table 5: Product Selector. |
| 02-May-2019 | 11       | Updated <a href="#">Table 9. Ordering information</a> .<br>Minor text changed.                                                 |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to [www.st.com/trademarks](http://www.st.com/trademarks). All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2019 STMicroelectronics – All rights reserved





**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331