


# 10-ohm 0.5%, 1%, 2%, 5% tolerance thick film current sense resistor



## features

- Marking: 1H: no marking on black protective coating  
1E, 1J: No marking on indigo protective coating.  
2A~W3A: three or four digit marking on indigo protective coating.
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified: 0402 (1E), 0603 (1J), 0805 (2A), 1206 (2B), 1210 (2E), 2010 (2H/W2H), 2512 (3A/W3A)

## dimensions and construction

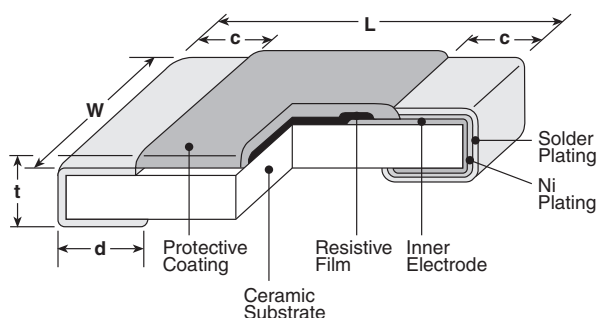

| Type<br>(Inch Size Code) | Dimensions inches (mm)                                                           |                                                                                   |                         |                                                                                  |                          |
|--------------------------|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------|----------------------------------------------------------------------------------|--------------------------|
|                          | L                                                                                | W                                                                                 | c                       | d                                                                                | t                        |
| <b>1H</b><br>(0201)      | .024±.001<br>(0.6±0.03)                                                          | .012±.001<br>(0.3±0.03)                                                           | .004±.002<br>(0.1±0.05) | .006±.002<br>(0.15±0.05)                                                         | .009±.001<br>(0.23±0.03) |
| <b>1E</b><br>(0402)      | .039 <sup>+.004</sup> <sub>-.002</sub><br>(1.0 <sup>+.01</sup> <sub>-.05</sub> ) | .02 <sup>+.004</sup> <sub>-.002</sub><br>(0.5 <sup>+.01</sup> <sub>-.05</sub> )   | .01±.004<br>(0.25±0.1)  | .01±.004<br>(0.25±0.1)                                                           | .014±.002<br>(0.35±0.05) |
| <b>1J</b><br>(0603)      | .063±.008<br>(1.6±0.2)                                                           | .031 <sup>+.006</sup> <sub>-.004</sub><br>(0.8 <sup>+.015</sup> <sub>-.01</sub> ) | .014±.004<br>(0.35±0.1) | .014±.004<br>(0.35±0.1)                                                          | .018±.004<br>(0.45±0.1)  |
| <b>2A</b><br>(0805)      | .079±.008<br>(2.0±0.2)                                                           | .049±.004<br>(1.25±0.1)                                                           | .016±.008<br>(0.4±0.2)  | .012 <sup>+.008</sup> <sub>-.004</sub><br>(0.3 <sup>+.02</sup> <sub>-.01</sub> ) | .02±.004<br>(0.5±0.1)    |
| <b>2B</b><br>(1206)      | .126±.008<br>(3.2±0.2)                                                           | .063±.008<br>(1.6±0.2)                                                            | .02±.012<br>(0.5±0.3)   | .016 <sup>+.008</sup> <sub>-.004</sub><br>(0.4 <sup>+.02</sup> <sub>-.01</sub> ) | .024±.004<br>(0.6±0.1)   |
| <b>2E</b><br>(1210)      |                                                                                  | .102±.008<br>(2.6±0.2)                                                            |                         |                                                                                  |                          |
| <b>2H</b><br>(2010)      |                                                                                  | .098±.008<br>(2.5±0.2)                                                            |                         |                                                                                  |                          |
| <b>W2H</b><br>(2010)     | .197±.008<br>(5.0±0.2)                                                           | .098±.008<br>(2.5±0.2)                                                            | .02±.012<br>(0.5±0.3)   | .026±.006<br>(0.65±0.15)                                                         | .024±.004<br>(0.6±0.1)   |
| <b>3A</b><br>(2512)      | .248±.008<br>(6.3±0.2)                                                           | .122±.008<br>(3.1±0.2)                                                            |                         | .016 <sup>+.008</sup> <sub>-.004</sub><br>(0.4 <sup>+.02</sup> <sub>-.01</sub> ) |                          |
| <b>W3A</b><br>(2512)     |                                                                                  |                                                                                   |                         | .026±.006<br>(0.65±0.15)                                                         |                          |

## ordering information

| New Part # | SR73 | 2B                                                         | T                                                                                                             | TD                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 1R00                                                                                                                                                                                                                                                                                                    | F                                      |
|------------|------|------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| Type       |      | Size                                                       | Termination Material                                                                                          | Packaging                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Nominal Resistance                                                                                                                                                                                                                                                                                      | Tolerance                              |
|            |      | 1H<br>1E<br>1J<br>2A<br>2B<br>2E<br>W2H<br>W3A<br>2H<br>3A | T: Sn<br>L: SnPb (1E,<br>1J, 2A, 2B, 2E,<br>2H, 3A)<br>G: Au (1J, 2A,<br>2B: 0.1Ω - 10Ω -<br>contact factory) | TCM: 0201 only:<br>7" 2mm pitch pressed paper<br>TPL: 0402 only: 2mm pitch punch paper<br>TP: 0402, 0603, 0805: 7" 2mm pitch<br>punch paper<br>TD: 0603, 0805, 1206, 1210:<br>7" 4mm pitch punched paper<br>TDD: 0603, 0805, 1206, 1210:<br>10" paper tape<br>TE: 0805, 1206, 1210, 2010 & 2512:<br>7" embossed plastic<br>TED: 0805, 1206, 1210, 2010 & 2512:<br>10" embossed plastic<br>For further information on packaging,<br>please refer to Appendix A | ±2%, ±5%: 2 significant figures<br>+ 1 multiplier "R" indicates<br>decimal on value <10Ω<br>±1%: 3 significant figures<br>+ 1 multiplier "R" indicates<br>decimal on value <100Ω<br>All values less than 0.1Ω<br>(100mΩ) are expressed in<br>mΩ with "L" as decimal<br>Example: 20mΩ = 20L<br>(3-digit) | D: ±0.5%<br>F: ±1%<br>G: ±2%<br>J: ±5% |

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/16/14

## applications and ratings

| Part Designation*              | Power Rating @ 70°C           | T.C.R. (ppm/°C) Max. | Resistance Range    |                   |              |                 | Absolute Maximum Working Voltage | Maximum Overload Voltage (5 Secs. Max.) | Rated Terminal Part Temp. | Operating Temp. Range |  |  |
|--------------------------------|-------------------------------|----------------------|---------------------|-------------------|--------------|-----------------|----------------------------------|-----------------------------------------|---------------------------|-----------------------|--|--|
|                                |                               |                      | E-24, E-96 (D±0.5%) | E-24, E-96 (F±1%) | E-24 (G±2%)  | E-24 (J±5%)     |                                  |                                         |                           |                       |  |  |
| SR731H (0201)                  | 0.1W                          | 0 - ±500             | —                   | —                 | —            | 0.18Ω - 0.24Ω   | 1.0V                             | 2.5V                                    | —                         | -55°C to +125°C       |  |  |
|                                |                               | 0 - ±400             |                     | 1Ω - 10Ω**        |              | 0.27Ω - 10Ω     |                                  |                                         |                           |                       |  |  |
| SR731E (0402)                  | 1/8W (.125W)<br>1/6W (.166W') | ±200                 | —                   | 0.51Ω - 10Ω**     | 0.51Ω - 10Ω  | 0.51Ω - 10Ω     | 1.11V                            | 2.79V                                   | 125°C                     | -55°C to +150°C       |  |  |
|                                |                               | ±250                 | —                   | 0.2Ω - 0.47Ω**    | 0.2Ω - 0.47Ω | 0.2Ω - 0.47Ω    |                                  |                                         |                           |                       |  |  |
|                                |                               | ±300                 | —                   | 0.1Ω - 0.18Ω**    | 0.1Ω - 0.18Ω | 0.1Ω - 0.18Ω    |                                  |                                         |                           |                       |  |  |
| SR731J (0603)                  | 1/5W (.2W)                    | ±200                 | —                   | 0.1Ω - 10Ω        | 0.1Ω - 10Ω   | 0.1Ω - 10Ω      | 1.41V                            | 3.53V                                   |                           |                       |  |  |
| SR732A (0805)                  | 1/4W (.25W)<br>1/3W (.33W')   | ±100                 | 0.15Ω - 10Ω         | 0.1Ω - 10Ω        | —            | —               | 1.58V                            | 3.95V                                   |                           |                       |  |  |
|                                |                               | ±200                 | —                   | —                 | 0.1Ω - 10Ω   | 0.1Ω - 10Ω      |                                  |                                         |                           |                       |  |  |
|                                |                               | ±500                 | —                   | —                 | —            | 0.051Ω - 0.091Ω |                                  |                                         |                           |                       |  |  |
|                                |                               | ±800                 | —                   | —                 | —            | 0.030Ω - 0.047Ω |                                  |                                         |                           |                       |  |  |
| SR732B (1206)                  | 1/3W (.33W)<br>1/2W (.5W')    | ±100                 | 0.15Ω - 10Ω         | 0.1Ω - 10Ω        | —            | —               | 1.81V                            | 4.54V                                   |                           |                       |  |  |
|                                |                               | ±200                 | —                   | —                 | 0.1Ω - 10Ω   | 0.1Ω - 10Ω      |                                  |                                         |                           |                       |  |  |
|                                |                               | ±500                 | —                   | —                 | —            | 0.056Ω - 0.091Ω |                                  |                                         |                           |                       |  |  |
|                                |                               | ±800                 | —                   | —                 | —            | 0.030Ω - 0.051Ω |                                  |                                         |                           |                       |  |  |
| SR732E (1210)                  | 1/2W (.5W)<br>2/3W (.66W')    | ±100                 | —                   | 0.1Ω - 10Ω        | —            | —               | 2.23V                            | 5.59V                                   |                           |                       |  |  |
|                                |                               | ±200                 | —                   | —                 | 0.1Ω - 10Ω   | 0.047Ω - 10Ω    |                                  |                                         |                           |                       |  |  |
|                                |                               | ±500                 | —                   | —                 | —            | 0.036Ω - 0.043Ω |                                  |                                         |                           |                       |  |  |
|                                |                               | ±1000                | —                   | —                 | —            | 0.024Ω - 0.033Ω |                                  |                                         |                           |                       |  |  |
| SR732H/W2H <sup>2</sup> (2010) | 3/4W (.75W)                   | ±100                 | —                   | 0.1Ω - 10Ω        | —            | —               | 2.73V                            | 6.84V                                   |                           |                       |  |  |
|                                |                               | ±200                 | —                   | —                 | 0.1Ω - 10Ω   | 0.1Ω - 10Ω      |                                  |                                         |                           |                       |  |  |
|                                |                               | ±500                 | —                   | —                 | —            | 0.056Ω - 0.091Ω |                                  |                                         |                           |                       |  |  |
|                                |                               | ±800                 | —                   | —                 | —            | 0.033Ω - 0.051Ω |                                  |                                         |                           |                       |  |  |
| SR733A/W3A (2512)              | 1W                            | ±100                 | —                   | 0.1Ω - 10Ω        | —            | —               | 3.16V                            | 7.90V                                   |                           |                       |  |  |
|                                |                               | ±200                 | —                   | —                 | 0.1Ω - 10Ω   | 0.1Ω - 10Ω      |                                  |                                         |                           |                       |  |  |
|                                |                               | ±500                 | —                   | —                 | —            | 0.056Ω - 0.091Ω |                                  |                                         |                           |                       |  |  |
|                                |                               | ±800                 | —                   | —                 | —            | 0.039Ω - 0.051Ω |                                  |                                         |                           |                       |  |  |

\* Parentheses indicate EIA package size codes.

\*\* 1H, 1E (F: ±1%) E-24 values only.

<sup>1</sup> Please refer to the "Higher Power Ratings" statement in the beginning of the catalog. Contact KOA prior to usage.


<sup>2</sup> SR73W3AS (2010 size, 1 Watt) with limited Resistance Range - contact factory for details.

Rated ambient temperature: +70°C


Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower

## environmental applications

### Derating Curve

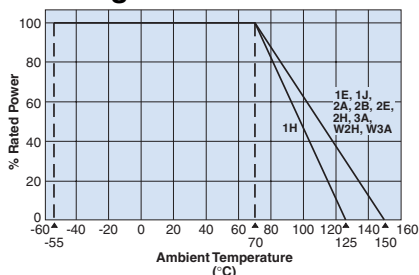

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the derating curve.

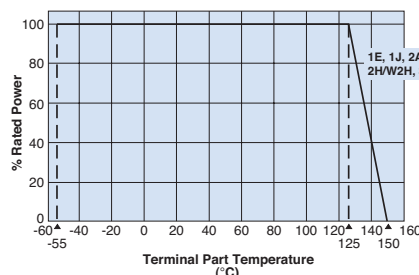

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve.

Please refer to "Introduction of the derating curve based on the terminal part temperature" on the beginning of our catalog before use.

## Performance Characteristics

| Parameter                   | Requirement $\Delta R \pm (\% + 0.005\Omega)$ |                             | Test Method                                                                    |
|-----------------------------|-----------------------------------------------|-----------------------------|--------------------------------------------------------------------------------|
|                             | Limit                                         | Typical                     |                                                                                |
| Resistance                  | Within specified tolerance                    | —                           | 25°C                                                                           |
| T.C.R.                      | Within specified T.C.R.                       | —                           | +25°C/-55°C and +25°C/+125°C                                                   |
| Overload (Short time)       | ±2%                                           | ±0.5%                       | Rated voltage x 2.5 for 5 seconds                                              |
| Resistance to Solder Heat   | 1H: ±3%,<br>1E~W3A: ±1%                       | 1H: ±0.75%<br>1E~W3A: ±0.3% | 260°C ± 5°C, 10 seconds ± 1 second                                             |
| Rapid Change of Temperature | ±1%                                           | ±0.3%                       | -40°C (30 minutes), +125°C (30 minutes), 100 cycles                            |
| Moisture Resistance         | 1H: ±3%<br>1E~W3A: ±2%                        | ±1%                         | 40°C ± 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle                |
| Endurance at 70°C           | 1H: ±3%<br>1E~W3A: ±2%                        | ±1%                         | 70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle                            |
| High Temperature Exposure   | ±1%                                           | ±0.3%                       | 1H: +125°C, 1000 hours; 1E, 1J, 2A, 2B, 2E, 2H/W2H, 3A/W3A: +150°C, 1000 hours |

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/05/14



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331