


Ceramic Disc Capacitors (Straight Leads) Gap-Kap 1 kV to 3 kV

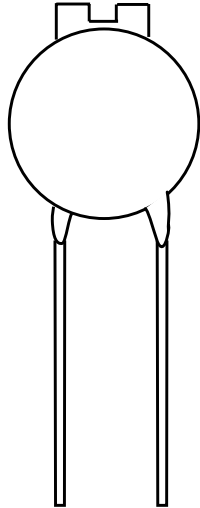

Simplified Outline

FEATURES

- High reliability
- Straight leads
- Lead (Pb)-free available

APPLICATIONS

- Monitors
- Color TV

DESIGN

The capacitors consist of a ceramic disc both sides of which are silver-plated. Connection leads are made of tinned copper having a diameter of 0.8 mm.

The capacitors are supplied with straight leads and lead spacings from 5.0 mm to 10.0 mm. Encapsulation is phenolic resin coated, flammable resistant in accordance with "UL94V-0".

INTRODUCTION

BCcomponents Gap-Kap capacitors provide a safe reliable discharge path for stray transient overvoltages and static voltage build-up. Combination of capacitor-spark-gap construction allows the circuit designer to specify lower voltage components and consequently lower cost, with assurance that overvoltage conditions will be prevented.

The Gap-Kap capacitor is ideally suited for many industrial commercial equipment applications. A typical application in color TV monitors utilizes a minimum capacitance Gap-Kap which is inserted between the grid lead and chassis ground. This protects the components of control circuitry by providing a low impedance path to ground for transient voltages of 1500 volts and above.

CAPACITANCE RANGE:

At 1 kHz, 1 ± 0.2 V (RMS); 0.75 to 22 000 pF

RATED DC VOLTAGE:

1 kV; 1.5 kV; 3 kV

INSULATION RESISTANCE AT 500 V (DC):

$\geq 10\,000$ M Ω min.

TOLERANCE ON CAPACITANCE:

± 10 %; ± 20 %

DISSIPATION FACTOR:

At 1 kHz, 1 ± 0.2 V (RMS); 2.5 % max



RoHS
COMPLIANT

TEMPERATURE COEFFICIENTS:

EIA code Z5P or Z5U

SECTIONAL SPECIFICATIONS:

Class 2 IEC 60 384-9,

EIA 198

OPERATING TEMPERATURE RANGE:

- 30 to + 85 °C

MARKING

Marking indicates capacitance value and tolerance in accordance with "EIA 198" and voltage marks.

The capacitors meet the essential requirements of IEC 60 384-9 and EIA 198. Unless stated otherwise all electrical values apply at an ambient temperature of 25 ± 3 °C, at normal atmospheric conditions.



| ORDERING INFORMATION | | | | | | | |
|----------------------|-------------|--------------------------------|----------------------------|--------------------------|--------------------------|---------------------------|--|
| C (pF) | TOL. (%) | VOLTAGE | | D _{max} (mm) | T _{max} (mm) | LEAD SPACING S (mm) | CLEAR TEXT CODE 16 th DIGIT: R = RoHS COMPLIANT |
| | | WORKING (kV _{DC}) | ARC (kV _{DC}) | | | | |
| 0.75 | max | 1.0 | 1.0 - 2.0 | 11.0 | 5.0 | 5.0 | S758X43000183L5. |
| | | | | | | 6.4 | S758X43000183L6. |
| 1000 | ± 20 | 1.5 | 2.0 - 3.0 | 11.0 | 4.5 | 5.0 | S102M43Z5P283L5. |
| | | | | | | 6.4 | S102M43Z5P283L6. |
| 4700 | ± 20 | 3.0 | 4.0 - 6.0 | 24.5 | 6.0 | 10.0 | S472M96Z5P483L0. |
| 10 000 | ± 20 | 1.5 | 2.0 - 3.0 | 17.5 | 5.0 | 10.0 | S103M69Z5U283L0. |
| 22 000 | ± 20 | 1.5 | 2.0 - 3.0 | 24.5 | 4.5 | 10.0 | S223M96Z5U283L0. |

| PACKAGING | | | | | |
|---------------------------------|-----------|-----------------|---------------|------|-------------------------------|
| PACKAGING TYPE | SIZE CODE | LEAD SPACE (mm) | VOLTAGE (VDC) | SPQ | BOX DIMENSIONS L × W × H (mm) |
| Bulk (long lead L ≥ 25.4 mm) | 20 to 47 | all | all | 1000 | 245 x 120 x 65 |
| | | | | 1000 | |
| | 1000 | | | | |
| | 500 | | | | |
| | 250 | | | | |
| | 53 to 75 | | | | |
| | 84 to 96 | | | | |

Note

The capacitors are supplied in bulk packaging (cardboard boxes).



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331