


# MegaRAID® SAS 9341-8i & MegaRAID SAS 9341-4i

## Cost Effective, Entry Line of Eight-Port and Four-Port 12Gb/s PCIe 3.0 SATA+SAS RAID Controllers

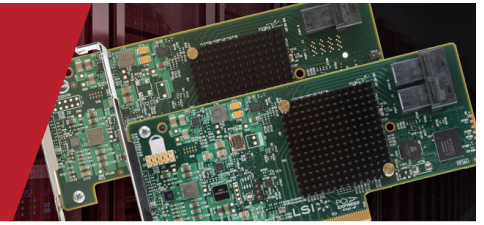

### Key Advantages

- High performance with 12Gb/s data transfer rates
- PCI Express® 3.0 host interface drives superior system performance
- Delivers robust, yet simple RAID functionality
- Flexible SATA+SAS array architecture optimizes cost
- Complete kit package includes necessary cables and brackets
- Includes JBOD Mode support Applications
- Internal storage configurations
- 1U/2U rack servers
- File, Web, database and email servers
- High-performance workstations

### Typical Uses

- Direct-attach, internal SAS or SATA hard disk drives (HDDs) and solid state drives (SSDs)
- High volume, "warm data" access

### Key Features

- Eight internal 12Gb/s SATA+SAS ports
- x8 PCI Express 3.0 host interface
- Two x4 SFF-8643 mini-SAS HD internal connectors
- LSI SAS3008 PowerPC 476 controller @ 1.2GHz
- RAID 0, 1, 5, 10, 50 and JBOD mode
- Low-profile form factor
- Supports up to 64 devices in JBOD mode
- Up to 32 physical devices in RAID mode
- Powerful device monitoring and maintenance capabilities

### MegaRAID SATA+SAS Entry Product Line

MegaRAID SATA+SAS entry controller cards allow small to medium business (SMB) owners and gaming enthusiasts to enjoy the latest RAID technology at affordable prices with low power consumption. This product line delivers trusted MegaRAID reliability with minimal maintenance effort. MegaRAID entry controller cards offer users a straight-forward solution that includes essential RAID levels and uncomplicated configuration options.

In addition, they are able to connect to combinations of SATA and SAS hard disk drives and solid state drives, allowing for storage configurations that optimize cost, performance and robust data protection.

### Enterprise Ready

Along with an extensive list of enterprise RAID capabilities, the 9341 series now offers advanced drive diagnostic technologies. In the event of a physical drive failure, the drive is placed in a shielded state and the MegaRAID controller starts drive diagnostics to determine if the drive is indeed failed or can be restored. This saves customers time, money and lost compute time associated with transient drive failures and unnecessary drive returns.

### Simple Migration to MegaRAID Enterprise Products

A unique feature of the MegaRAID SATA+SAS entry line is the ability to migrate from these simple, yet powerful RAID 5 controllers to the more full-featured MegaRAID product lines. Users can simply plug in a new controller to recognize and import the existing array without requiring any reconfiguration. Plus, a single management client provides a consistent user interface to manage any MegaRAID SATA, SAS or SSD array.

### 12Gb/s SAS and PCI 3.0 Performance Advantages

12Gb/s SAS is designed for backward compatibility with 6Gb/s and 3Gb/s SAS and SATA hard drives. Regardless of the drive speed, 12Gb/s MegaRAID controllers will deliver significant performance improvements in both read and write applications compared to their predecessors.

| MegaRAID SAS 9341-8i & 9341-4i    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                              |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| Solution Provided                 | Low-cost, green SATA+SAS RAID solution for high-density servers and workstations with the flexibility to use both SATA and SAS hard drives and solid state drives                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                              |
| Physical Dimensions               | 9341-8i & 9341-4i: 2.6" x 6.0"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                              |
| Connectors                        | 9341-8i: Two, x4, SFF-8643 mini-SAS HD horizontal connector placement<br>9341-4i: One, x4, SFF-8643 mini-SAS HD horizontal connector placement                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                              |
| Max Number of Physical Devices    | Non-RAID (JBOD Mode): 64<br>RAID 0: 32 per volume<br>RAID 1: 2 per volume plus hot spare                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | RAID 5: 32 per volume<br>RAID 10: 32 per volume<br>RAID 50: 32 per volume                                                                    |
| Host Bus Type                     | 8-lane, 5 GT/s PCI Express 3.0 Compliant                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                              |
| Data Transfer Rates               | Up to 12Gb/s per port                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                              |
| Key RAID Data Protection Features | <ul style="list-style-type: none"> <li>• RAID levels 0, 1, 5, 10, 50 and JBOD mode</li> <li>• Online Capacity Expansion (OCE)</li> <li>• Online RAID Level Migration (RLM)</li> <li>• Auto resume after loss of system power during array rebuild or RLM</li> <li>• Single controller multipathing (Load balancing)</li> <li>• Drive hot plug support</li> <li>• Drive roaming</li> <li>• Selectable logical drive as boot drive</li> <li>• Virtual Disk (VD) Consistency Check</li> <li>• Fast initialization for quick array setup</li> <li>• Staggered disk spin up</li> <li>• Hot Spare support (up to 8) <ul style="list-style-type: none"> <li>– Global, dedicated (copy back), enclosure affinity and emergency SATA support</li> </ul> </li> <li>• Automatic rebuild support</li> <li>• SafeStore Encryption Services for SED HDDs</li> <li>• Shielded state drive diagnostic technology</li> <li>• Patrol Read media scan and repair</li> <li>• Online HDD firmware update</li> <li>• Error recovery support</li> <li>• SAS TCQ support</li> <li>• SATA NCQ support</li> <li>• Support for native 4K HDDs</li> <li>• Non disk device support</li> <li>• &gt;2TB logical drive support</li> <li>• Soft bad block management</li> <li>• DDF-compliant Configuration on Disk</li> <li>• Foreign Configuration Import</li> <li>• S.M.A.R.T. support</li> <li>• SES (inband) &amp; SGPIO (sideband) management</li> </ul> |                                                                                                                                              |
| MegaRAID Management Suite         | <ul style="list-style-type: none"> <li>• MegaRAID Storage Manager™ <ul style="list-style-type: none"> <li>– Now with single login for domain admin</li> </ul> </li> <li>• StorCLI (command-line interface)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <ul style="list-style-type: none"> <li>• CTRL-R (BIOS configuration utility)</li> <li>• HII (UEFI Human Interface Infrastructure)</li> </ul> |
| Environments                      | Operating<br>0°C to 70°C<br>5 to 90% Non-condensing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Storage<br>-45°C to 105°C<br>5 to 90% Non-condensing                                                                                         |
| PCI Card Type                     | 3.3V add-in Card                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                              |
| PCI Voltage                       | +12V +/-8%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                              |
| PCI Power                         | 13.0 W (normal), 19.04 W (max)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                              |
| PCI Modes                         | Bus Master DMA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                              |
| LED Indicators                    | Internal<br>Activity/Fault per x4 port – Heartbeat                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                              |
| MTFB                              | >2,800,000 hours                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                              |
| Compliances                       | EMC: Class B-US (CFR 47, P15B); Canada (ICES-003); Japan (V-3/02.04); Europe (EN55022/EN55024); Australia/New Zealand (AS/NZS 3548); Safety: EN60950                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                              |
| Regulatory Certifications         | EN55022, EN55024, EN60950, EN 61000-3-2, EN 61000-3-3; FCC Class A, Class B; UL1950; UL; CSA C22.2; VCCI; RRL for MIC; BSMI; C-tick                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                              |
| OS Support                        | Extensive support includes Microsoft® Windows® Server 2012/Vista/2008/Server 2003, Linux®, Solaris™ (x86), FreeBSD®, VMware® and more.<br>Visit the download center for the most complete list of supported operating systems: <a href="http://www.lsi.com/support">www.lsi.com/support</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                              |
| Brackets                          | Full Height and Low-Profile                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                              |
| Warranty                          | 3 years, advanced replacement option; Free technical support at <a href="http://www.lsi.com/support">www.lsi.com/support</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                              |

## Ordering Information

| MegaRAID SAS 9341-4i Single Pack | MegaRAID SAS 9341-8i Single Pack |
|----------------------------------|----------------------------------|
| MPN: 05-26105-00                 | MPN: 05-26106-00                 |
| OPN: LSI00419                    | OPN: LSI00407                    |



Visit the Avago Server Storage website at: [avagotech.com/server-storage](http://avagotech.com/server-storage)

Avago, Avago Technologies, MegaRAID, and the Storage by LSI logo are trademarks of Avago Technologies. All other trademarks are the property of their respective owners.

Copyright ©2015 Avago Technologies. All rights reserved. > 9.18.15



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331