




Wiha. Premium Tools
for Professionals.

Wiha ESD Safe Conductive Screwdrivers. For Anti-Static Applications.


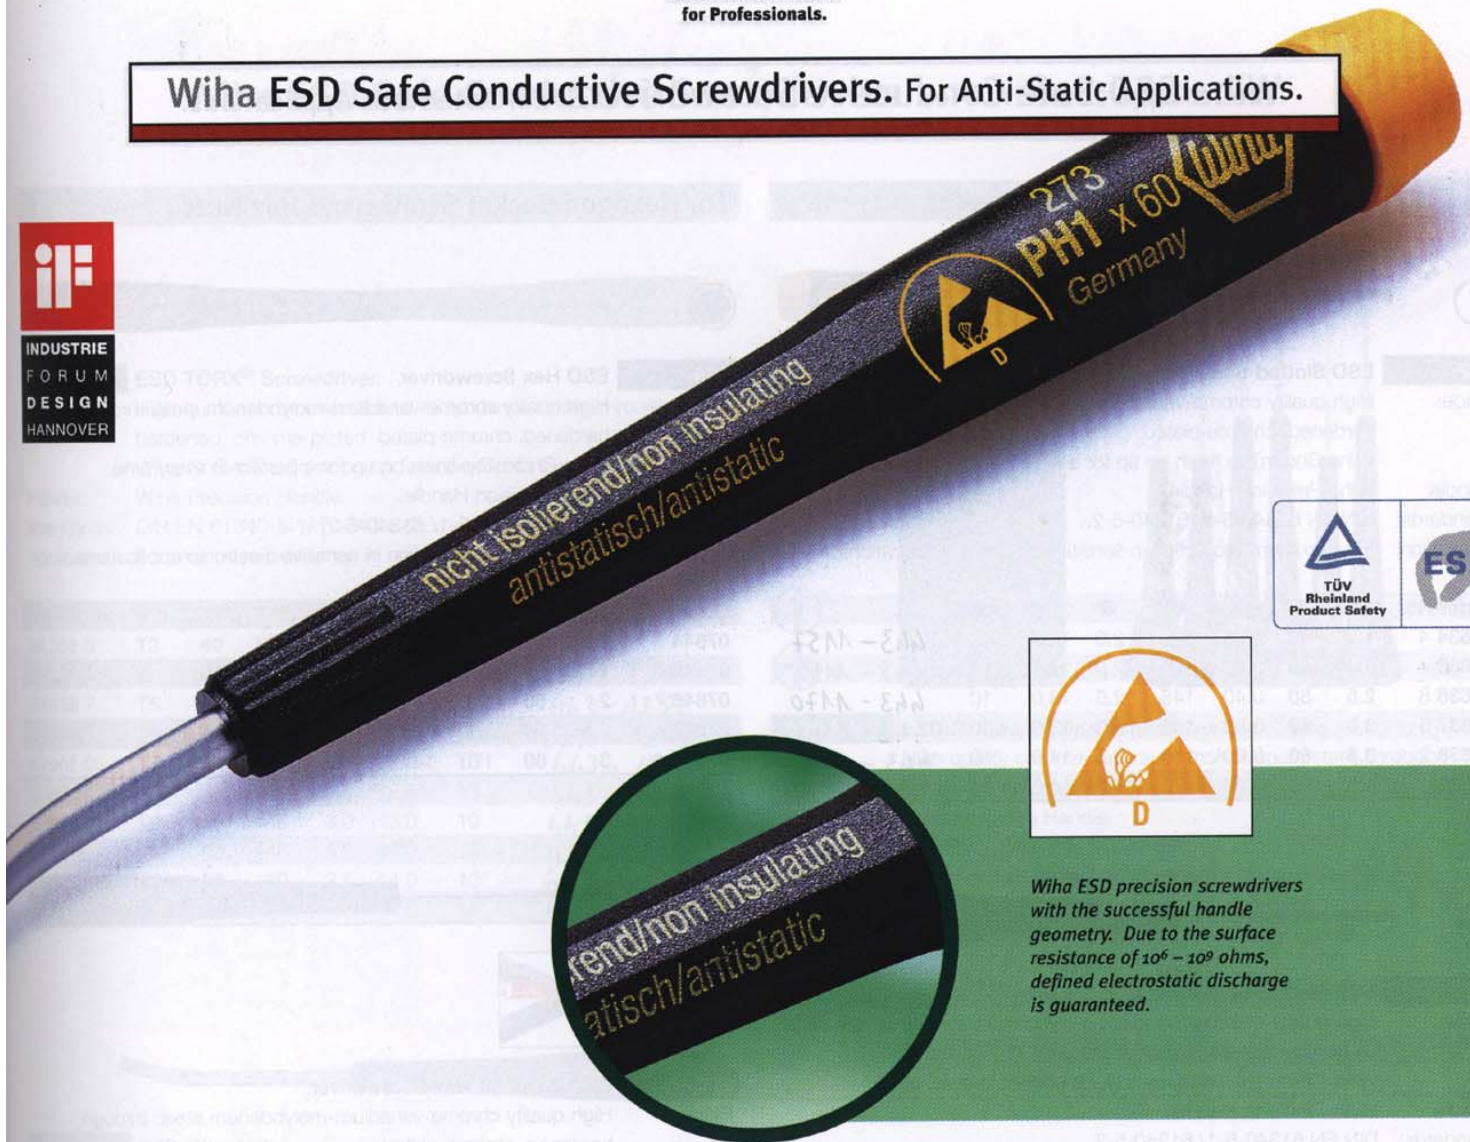


Wiha ESD precision screwdrivers with the successful handle geometry. Due to the surface resistance of $10^6 - 10^9$ ohms, defined electrostatic discharge is guaranteed.

Electrostatic discharges are a major problem, since even low voltages can damage sensitive components.

Various factors have to be considered in order to understand the problem. In ESD protection areas, the electrostatic charge is safely conducted to earth. Users have to wear the appropriate ESD footwear or grounded wrist strap. The tools used also have to be electrostatically protected.

The ESD screwdrivers from Wiha conform to the international ESD Standards DIN EN 61340-5-1/ 61340-5-2. Due to the electrical surface resistance, $10^6 - 10^9$ ohms, defined electrostatic discharge is guaranteed. Thanks to the rotating cap, incremental adjusting is easy. The large handle enables powerful tightening and loosening of screws.

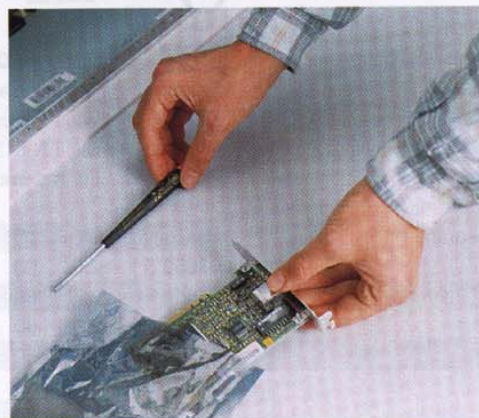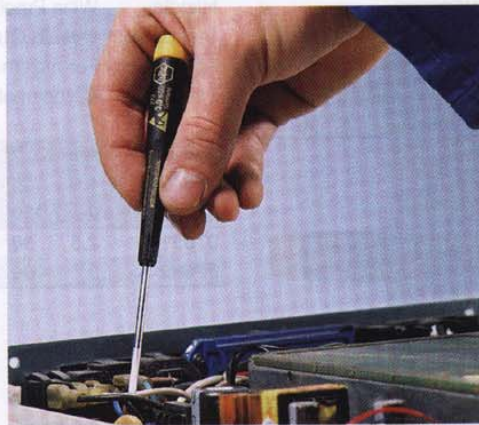

The Product Advantages:

- Safety as a result of electrostatic discharge
- Conforms to new ESD Standards DIN EN 61340-5-1/ 61340-5-2
- Rotating cap with large surface for extra fast working
- Large handle end for powerful tightening and loosening screws
- Wiha ChromTop-finish on tip for a perfect fit every time.

Please note:

These tools are not suited for working on live electrical components.



Wiha. Premium Tools
for Professionals.

Wiha ESD Safe Conductive Screwdrivers. For Anti-Static Applications.

For Slotted, Phillips & Pozidriv Screws.



272 ESD Slotted Screwdriver.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.

Wiha ChromTop finish on tip for a perfect fit every time.

Handle: Wiha Precision Handle.

Standards: DIN EN 61340-5-1/ 61340-5-2.

Application: For maximum protection in sensitive electronic applications.

Order-No.	Ø	Length	Tip Length	Tip Dia	Tip Length	Tip Dia	Tip Length	Tip Dia	Handwritten
07634 4	1.5	40	0.25	120	2.0	12.5	10		443-1157
07635 1	2.0	40	0.40	120	2.0	12.5	10		443-1169
07636 8	2.5	50	0.40	145	2.5	13.0	10		443-1170
07637 5	3.0	50	0.50	145	3.0	13.0	10		443-1182
07638 2	3.5	60	0.60	170	3.5	14.0	10		443-1194
07639 9	4.0	60	0.80	170	4.0	14.0	10		443-1200



273 ESD Phillips Screwdriver.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.

Wiha ChromTop finish on tip for a perfect fit every time.

Handle: Wiha Precision Handle.

Standards: DIN EN 61340-5-1/ 61340-5-2.

Application: For maximum protection in sensitive electronic applications.

Order-No.	Ø	Length	Tip Length	Tip Dia	Tip Length	Tip Dia	Tip Length	Tip Dia	Handwritten
07640 5	00	40	120	2.0	12.5	10			443-1212
07641 2	0	50	145	3.0	13.0	10			443-1224
07642 9	1	60	170	4.0	14.0	10			443-1236



274 ESD Pozidriv Screwdriver.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.

Wiha ChromTop finish on tip for a perfect fit every time.

Handle: Wiha Precision Handle.

Standards: DIN EN 61340-5-1/ 61340-5-2.

Application: For maximum protection in sensitive electronic applications.

Order-No.	Ø	Length	Tip Length	Tip Dia	Tip Length	Tip Dia	Tip Length	Tip Dia	Handwritten
07643 6	1	60	170	4.0	14	10			443-1248

For Hexagon Socket Screws and Hex Nuts.



275 ESD Hex Screwdriver.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.

Wiha ChromTop finish on tip for a perfect fit every time.

Handle: Wiha Precision Handle.

Standards: DIN EN 61340-5-1/ 61340-5-2.

Application: For maximum protection in sensitive electronic applications.

Order-No.	Ø	Length	Tip Length	Tip Dia	Tip Length	Tip Dia	Tip Length	Tip Dia	Handwritten
07644 3	1.3	40	120	12.5	10				
07645 0	1.5	50	145	13.0	10				
07646 7	2	50	145	13.0	10				
07647 4	2.5	60	170	14.0	10				
07648 1	3	60	170	14.0	10				



276 ESD Ballpoint Hex Screwdriver.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.

Wiha ChromTop finish on tip for a perfect fit every time.

Handle: Wiha Precision Handle.

Standards: DIN EN 61340-5-1/ 61340-5-2.

Application: For maximum protection in sensitive electronic applications.

Extra: Ballpoint allows up to 25 degree entry angle to fastener.

Order-No.	Ø	Length	Tip Length	Tip Dia	Tip Length	Tip Dia	Tip Length	Tip Dia	Handwritten
07649 8	1.5	50	145	13.0	10				443-1250
07650 4	2	50	145	13.0	10				443-1261
07651 1	2.5	60	170	14.0	10				443-1273
07652 8	3	60	170	14.0	10				443-1285



277 ESD Nut Driver.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.

Handle: Wiha Precision Handle.

Standards: DIN EN 61340-5-1/ 61340-5-2.

Application: For maximum protection in sensitive electronic applications.

Order-No.	Ø	Length	Tip Length	Tip Dia	Tip Length	Tip Dia	Tip Length	Tip Dia	Handwritten
07653 5	2.5	60	155	4.0	4.0	13.0	10		443-1297
07654 2	3	60	155	5.0	5.0	13.0	10		443-1303
07655 9	3.5	60	155	5.3	6.0	13.0	10		443-1315
07656 6	4	60	155	5.5	6.0	13.0	10		443-1327
07657 3	5	60	155	6.8	7.0	13.0	10		443-1339
07658 0	5.5	60	170	7.6	8.0	14.0	10		443-1340

Please note:
These tools are not suited for working
on live electrical components.



Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331