
**VOLTAGE DETECTOR
WITH OUTPUT DELAY
RN5VD SERIES**

APPLICATION MANUAL

RN5VD SERIES

OUTLINE

The RN5VD Series are voltage detector ICs with output delay functions and high detector threshold accuracy and ultra-low supply current by CMOS process, which can be operated at an extremely low voltage and is used, for instance, for system reset.

Each of these ICs consists of a voltage reference unit, a comparator, resistors for voltage detection, an output driver, a hysteresis circuit and an output delay generator. The detector threshold is fixed with high accuracy in the IC and requires no adjustment.

The RN5VD Series are operable by a lower voltage than that for the R×5VL Series, and can be driven by a single battery.

Two output types, Nch open drain type and CMOS type, are available. Since the package for these ICs are SOT-23-5(Mini-mold)package, high density mounting of the ICs on board is possible.

FEATURES


- Output DelayTYP. 100ms with external capacitor : 0.15μF
- Ultra-low supply currentTYP. 1.0μA (RN5VD15× : V_{DD}=3.5V)
- Broad Operating Voltage Range0.7V to 10.0V
- Detector ThresholdStepwise setting with a step of 0.1V in the range of 0.9V to 6.0V is possible. (refer to Selection Guide) .
- High accuracy detector threshold±2.5%
- Low Temperature-Drift Coefficient of Detector ThresholdTYP. ±100ppm/°C
- Two Output Types.....Nch Open Drain and CMOS
- Small PackageSOT-23-5(Mini-mold)

APPLICATIONS


- CPU & Logic Circuit Reset
- Battery Checker
- Window Comparator
- Wave Shaping Circuit
- Battery Back-Up Circuit
- Power Failure Detector

BLOCK DIAGRAMS

• Nch Open Drain Output (RN5VD××A)

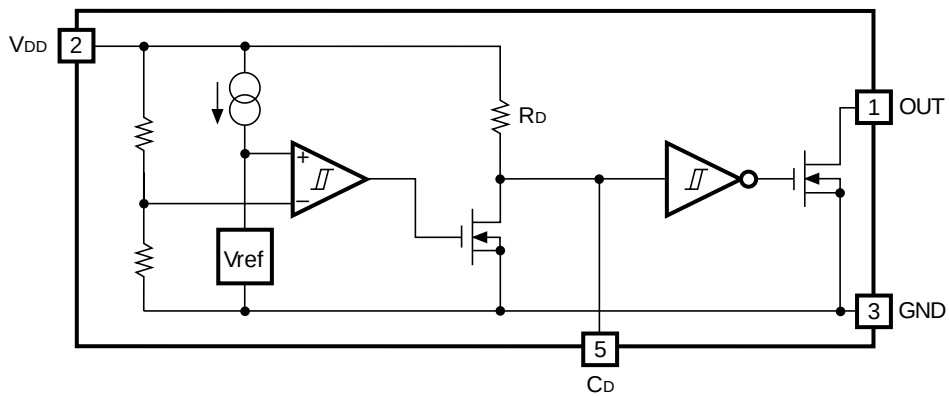

• CMOS Output (RN5VD××C)

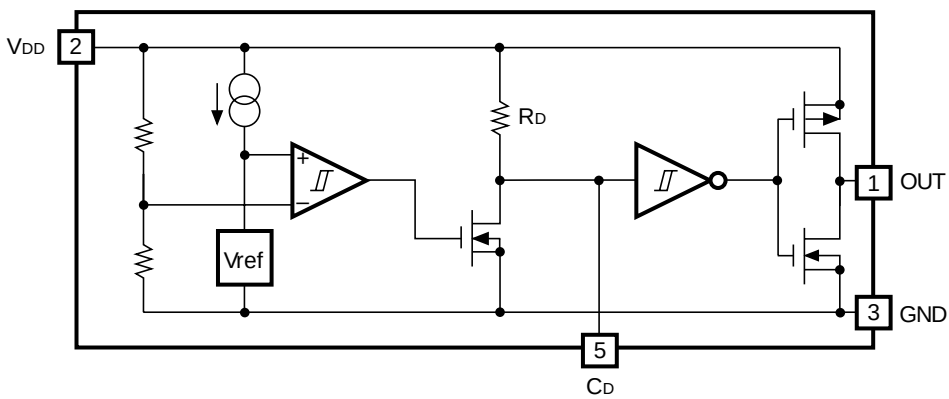

SELECTION GUIDE


The detector threshold, the output type, the packing type, and the taping type of RN5VD Series can be designating at the user's request by specifying the part number as follows :

RN5VD $\underbrace{\text{XXXX}}_{\substack{\uparrow \uparrow \uparrow \\ \text{a b c}}} \underbrace{\text{XX}}_{\uparrow \text{d}} \leftarrow \text{Part Number}$

Code	Contents
a	Setting Detector Threshold ($-V_{DET}$) : Stepwise setting with a step of 0.1V in the range of 0.9V to 6.0V is possible.
b	Designation of Output Type A: Nch Open Drain C: CMOS
c	Designation of Packing Type A: Taping C: Antistatic bag for samples
d	Designation of Taping Type: Ex. SOT-23-5: TR, TL (refer to Taping Specification) “TR” is prescribed as a standard.

For example, the Product with Detector Threshold 3.5V, Output Type Nch Open Drain and Taping Type TR, is designated by Part Number RN5VD35AA-TR.

PIN CONFIGURATION

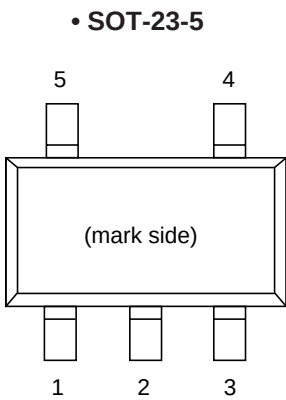

PIN DESCRIPTION

Pin No.	Symbol	Description
1	OUT	Output Pin
2	VDD	Input and power source for device itself
3	GND	Ground Pin
4	NC	No Connection
5	CD	Pin for external capacitor (for setting output delay)

ABSOLUTE MAXIMUM RATINGS

Symbol	Item	Rating		Unit
V _{DD}	Supply Voltage	12		V
V _{OUT}	Output Voltage	CNOS	V _{SS} −0.3 to V _{DD} +0.3	V
		Nch	V _{SS} −0.3 to 12	
I _{OUT}	Output Current	70		mA
P _D	Power Dissipation	150		mW
T _{opt}	Operating Temperature Range	−40 to +85		°C
T _{stg}	Storage Temperature Range	−55 to +125		°C
T _{solder}	Lead Temperature (Soldering)	260°C, 10s		

ABSOLUTE MAXIMUM RATINGS

Absolute Maximum ratings are threshold limit values that must not be exceeded even for an instant under any conditions. Moreover, such values for any two items must not be reached simultaneously. Operation above these absolute maximum ratings may cause degradation or permanent damage to the device. These are stress ratings only and do not necessarily imply functional operation below these limits.

ELECTRICAL CHARACTERISTICS

• RN5VD09A/C

T_{opt}=25°C

Symbol	Item	Conditions	MIN.	TYP.	MAX.	Unit.
-V _{DET}	Detector Threshold		0.878	0.900	0.922	V
V _{HYS}	Detector Threshold Hysteresis		0.027	0.045	0.063	V
I _{SS}	Supply Current	V _{DD} =0.8V		1.5	3.7	μA
		V _{DD} =2.9V		0.9	2.7	
V _{DDH}	Maximum Operating Voltage				10	V
V _{DDL}	Minimum Operating Voltage (Note 1)	T _{opt} =25°C		0.55	0.70	V
		-30°C≤T _{opt} ≤85°C		0.65	0.80	
I _{OUT}	Output Current	Nch V _{DS} =0.05V, V _{DD} =0.7V	0.01	0.05		mA
		V _{DS} =0.5V, V _{DD} =0.85V	0.05	0.50		
		Pch V _{DS} =-2.1V, V _{DD} =4.5V	1.0	2.0		mA
V _{TCD}	CD pin Threshold Voltage	V _{DD} =0.99V	0.297	0.495	0.693	V
I _{CD}	CD pin Sink Current	V _{DS} =0.1V, V _{DD} =0.7V	2.0	30		μA
		V _{DS} =0.5V, V _{DD} =0.85V	10.0	100.0		
R _D	Delay Resistance		0.5	1.0	2.0	MΩ
$\frac{\Delta-V_{DET}}{\Delta T_{opt}}$	Detector Threshold Temperature Coefficient	-30°C≤T _{opt} ≤85°C		±100		ppm/°C

(Note 1) Minimum Operating Voltage means the value of input voltage when output voltage maintains 0.1V or less, provided that in the case of Nch Open Drain Type Products, the pull-up resistance is set at 470kΩ, and the pull-up voltage is set at 5.0V.

• RN5VD18A/C

T_{opt}=25°C

Symbol	Item	Conditions	MIN.	TYP.	MAX.	Unit.
-V _{DET}	Detector Threshold		1.755	1.800	1.845	V
V _{HYS}	Detector Threshold Hysteresis		0.054	0.090	0.126	V
I _{SS}	Supply Current	V _{DD} =1.7V		2.5	5.0	μA
		V _{DD} =3.8V		1.0	3.0	
V _{DDH}	Maximum Operating Voltage				10	V
V _{DDL}	Minimum Operating Voltage (Note 1)	T _{opt} =25°C -30°C≤T _{opt} ≤85°C		0.55 0.65	0.70 0.80	V
I _{OUT}	Output Current	Nch V _{DS} =0.05V, V _{DD} =0.7V	0.01	0.05		mA
		V _{DS} =0.5V, V _{DD} =1.5V	1.0	2.0		
		Pch V _{DS} =-2.1V, V _{DD} =4.5V	1.0	2.0		mA
V _{TCD}	CD pin Threshold Voltage	V _{DD} =1.98V	0.693	0.990	1.287	V
I _{CD}	CD pin Sink Current	V _{DS} =0.1V, V _{DD} =0.7V	2.0	30		μA
		V _{DS} =0.5V, V _{DD} =1.5V	200.0	800.0		
R _D	Delay Resistance		0.5	1.0	2.0	MΩ
$\frac{\Delta-V_{DET}}{\Delta T_{opt}}$	Detector Threshold Temperature Coefficient	-30°C≤T _{opt} ≤85°C		±100		ppm/°C

(Note 1) Minimum Operating Voltage means the value of input voltage when output voltage maintains 0.1V or less, provided that in the case of Nch Open Drain Type Products, the pull-up resistance is set at 470kΩ, and the pull-up voltage is set at 5.0V.

• RN5VD27A/C
 $T_{opt}=25^{\circ}\text{C}$

Symbol	Item	Conditions		MIN.	TYP.	MAX.	Unit.
$-V_{DET}$	Detector Threshold			2.633	2.700	2.767	V
V_{HYS}	Detector Threshold Hysteresis			0.081	0.135	0.189	V
I_{SS}	Supply Current	$V_{DD}=2.6\text{V}$			3.5	7.0	μA
		$V_{DD}=4.7\text{V}$			1.1	3.3	
V_{DDH}	Maximum Operating Voltage					10	V
V_{DDL}	Minimum Operating Voltage (Note 1)	$T_{opt}=25^{\circ}\text{C}$ $-30^{\circ}\text{C}\leq T_{opt}\leq 85^{\circ}\text{C}$			0.55 0.65	0.70 0.80	V
I_{OUT}	Output Current	Nch	$V_{DS}=0.05\text{V}, V_{DD}=0.7\text{V}$	0.01	0.05		mA
			$V_{DS}=0.5\text{V}, V_{DD}=1.5\text{V}$	1.0	2.0		
		Pch	$V_{DS}=-2.1\text{V}, V_{DD}=4.5\text{V}$	1.0	2.0		mA
V_{TCD}	CD pin Threshold Voltage	$V_{DD}=2.97\text{V}$		1.188	1.485	1.782	V
I_{CD}	CD pin Sink Current	$V_{DS}=0.1\text{V}, V_{DD}=0.7\text{V}$		2.0	30		μA
		$V_{DS}=0.5\text{V}, V_{DD}=1.5\text{V}$		200.0	800.0		
R_D	Delay Resistance			0.5	1.0	2.0	$\text{M}\Omega$
$\frac{\Delta-V_{DET}}{\Delta T_{opt}}$	Detector Threshold Temperature Coefficient	$-30^{\circ}\text{C}\leq T_{opt}\leq 85^{\circ}\text{C}$			± 100		ppm/ $^{\circ}\text{C}$

(Note 1) Minimum Operating Voltage means the value of input voltage when output voltage maintains 0.1V or less, provided that in the case of Nch Open Drain Type Products, the pull-up resistance is set at 470k Ω , and the pull-up voltage is set at 5.0V.

• RN5VD36A/C

T_{opt}=25°C

Symbol	Item	Conditions		MIN.	TYP.	MAX.	Unit.
-V _{DET}	Detector Threshold			3.510	3.600	3.690	V
V _{HYS}	Detector Threshold Hysteresis			0.108	0.180	0.252	V
I _{SS}	Supply Current	V _{DD} =3.47V			4.5	9.0	μA
		V _{DD} =5.6V			1.2	3.6	
V _{DDH}	Maximum Operating Voltage					10	V
V _{DDL}	Minimum Operating Voltage (Note 1)	T _{opt} =25°C -30°C≤T _{opt} ≤85°C			0.55 0.65	0.70 0.80	V
I _{OUT}	Output Current	Nch	V _{DS} =0.05V, V _{DD} =0.7V	0.01	0.05		mA
			V _{DS} =0.5V, V _{DD} =1.5V	1.0	2.0		
		Pch	V _{DS} =-2.1V, V _{DD} =4.5V	1.0	2.0		mA
V _{TCD}	CD pin Threshold Voltage	V _{DD} =3.96V		1.584	1.980	2.376	V
I _{CD}	CD pin Sink Current	V _{DS} =0.1V, V _{DD} =0.7V		2.0	30		μA
		V _{DS} =0.5V, V _{DD} =1.5V		200.0	800.0		
R _D	Delay Resistance			0.5	1.0	2.0	MΩ
$\frac{\Delta-V_{DET}}{\Delta T_{opt}}$	Detector Threshold Temperature Coefficient	-30°C≤T _{opt} ≤85°C			±100		ppm/°C

(Note 1) Minimum Operating Voltage means the value of input voltage when output voltage maintains 0.1V or less, provided that in the case of Nch Open Drain Type Products, the pull-up resistance is set at 470kΩ, and the pull-up voltage is set at 5.0V.

• RN5VD45A/C
 $T_{opt}=25^{\circ}\text{C}$

Symbol	Item	Conditions	MIN.	TYP.	MAX.	Unit.
$-V_{DET}$	Detector Threshold		4.388	4.500	4.612	V
V_{HYS}	Detector Threshold Hysteresis		0.135	0.225	0.315	V
I_{SS}	Supply Current	$V_{DD}=4.34\text{V}$		5.5	11.0	μA
		$V_{DD}=6.5\text{V}$		1.3	3.9	
V_{DDH}	Maximum Operating Voltage				10	V
V_{DDL}	Minimum Operating Voltage (Note 1)	$T_{opt}=25^{\circ}\text{C}$ $-30^{\circ}\text{C}\leq T_{opt}\leq 85^{\circ}\text{C}$		0.55 0.65	0.70 0.80	V
I_{OUT}	Output Current	Nch $V_{DS}=0.05\text{V}, V_{DD}=0.7\text{V}$	0.01	0.05		mA
		$V_{DS}=0.5\text{V}, V_{DD}=1.5\text{V}$	1.0	2.0		
		Pch $V_{DS}=-2.1\text{V}, V_{DD}=8.0\text{V}$	1.5	3.0		mA
V_{TCD}	CD pin Threshold Voltage	$V_{DD}=4.95\text{V}$	1.980	2.475	2.970	V
I_{CD}	CD pin Sink Current	$V_{DS}=0.1\text{V}, V_{DD}=0.7\text{V}$	2.0	30		μA
		$V_{DS}=0.5\text{V}, V_{DD}=1.5\text{V}$	200.0	800.0		
R_D	Delay Resistance		0.5	1.0	2.0	$\text{M}\Omega$
$\frac{\Delta-V_{DET}}{\Delta T_{opt}}$	Detector Threshold Temperature Coefficient	$-30^{\circ}\text{C}\leq T_{opt}\leq 85^{\circ}\text{C}$		± 100		ppm/ $^{\circ}\text{C}$

(Note 1) Minimum Operating Voltage means the value of input voltage when output voltage maintains 0.1V or less, provided that in the case of Nch Open Drain Type Products, the pull-up resistance is set at 470k Ω , and the pull-up voltage is set at 5.0V.

• RN5VD54A/C

T_{opt}=25°C

Symbol	Item	Conditions		MIN.	TYP.	MAX.	Unit.
-V _{DET}	Detector Threshold			5.265	5.400	5.535	V
V _{HYS}	Detector Threshold Hysteresis			0.162	0.270	0.378	V
I _{SS}	Supply Current	V _{DD} =5.2V			6.0	12.0	μA
		V _{DD} =7.4V			1.4	4.2	
V _{DDH}	Maximum Operating Voltage					10	V
V _{DDL}	Minimum Operating Voltage (Note 1)	T _{opt} =25°C -30°C≤T _{opt} ≤85°C			0.55 0.65	0.70 0.80	V
I _{OUT}	Output Current	Nch	V _{DS} =0.05V, V _{DD} =0.7V	0.01	0.05		mA
			V _{DS} =0.5V, V _{DD} =1.5V	1.0	2.0		
		Pch	V _{DS} =-2.1V, V _{DD} =8.0V	1.5	3.0		mA
V _{TC}	CD pin Threshold Voltage	V _{DD} =5.94V		2.376	2.970	3.564	V
I _{CD}	CD pin Sink Current	V _{DS} =0.1V, V _{DD} =0.7V		2.0	30		μA
		V _{DS} =0.5V, V _{DD} =1.5V		200.0	800.0		
R _D	Delay Resistance			0.5	1.0	2.0	MΩ
$\frac{\Delta-V_{DET}}{\Delta T_{opt}}$	Detector Threshold Temperature Coefficient	-30°C≤T _{opt} ≤85°C			±100		ppm/°C

(Note 1) Minimum Operating Voltage means the value of input voltage when output voltage maintains 0.1V or less, provided that in the case of Nch Open Drain Type Products, the pull-up resistance is set at 470kΩ, and the pull-up voltage is set at 5.0V.

ELECTRICAL CHARACTERISTICS BY DETECTOR THRESHOLD

• RN5VD09A/C to RN5VD39A/C

Part Number.	Detector Threshold			Hysteresis			Supply Current 1			Supply Current 2			Output Current 1			Output Current 2																																																																																																																																																										
	-V _{DET} (V)			V _{HYS} (V)			I _{SS1} (μA)			I _{SS2} (μA)			I _{OUT1} (mA)			I _{OUT2} (mA)																																																																																																																																																										
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	conditions	TYP.	MAX.	conditions	TYP.	MAX.	conditions	MIN.	TYP.	conditions	MIN.	TYP.																																																																																																																																																								
RN5VD09A/C	0.878	0.900	0.922	0.027	0.045	0.063	V _{DD} = (-V _{DET}) -0.10V	1.5	3.7	V _{DD} = (-V _{DET}) +2.0V	0.9	2.7	Nch V _{DS} = 0.05V V _{DD} = 0.7V	0.01	0.05	Nch V _{DS} = 0.5V V _{DD} = 1.5V	V _{DD} = 0.85V	0.05	0.5																																																																																																																																																							
RN5VD10A/C	0.975	1.000	1.025	0.030	0.050	0.070		1.8	4.5		1.0	3.0					V _{DD} = 1.0V	0.2	1.0																																																																																																																																																							
RN5VD11A/C	1.073	1.100	1.127	0.033	0.055	0.077		2.0	5.0		V _{DD} = (-V _{DET}) +2.0V	1.1					3.3	Nch V _{DS} = 0.05V V _{DD} = 0.7V	0.01	0.05	Nch V _{DS} = 0.5V V _{DD} = 1.5V	1.0	2.0																																																																																																																																																			
RN5VD12A/C	1.170	1.200	1.230	0.036	0.060	0.084		2.5	5.0			1.2					3.6																																																																																																																																																									
RN5VD13A/C	1.268	1.300	1.332	0.039	0.065	0.091		V _{DD} = (-V _{DET}) -0.13V	4.0			8.0					V _{DD} = (-V _{DET}) +2.0V							1.2	3.6	Nch V _{DS} = 0.05V V _{DD} = 0.7V	0.01	0.05	Nch V _{DS} = 0.5V V _{DD} = 1.5V	1.0	2.0																																																																																																																																											
RN5VD14A/C	1.365	1.400	1.435	0.042	0.070	0.098			4.5			9.0												1.2	3.6																																																																																																																																																	
RN5VD15A/C	1.463	1.500	1.537	0.045	0.075	0.105			V _{DD} = (-V _{DET}) -0.13V			4.5												9.0	V _{DD} = (-V _{DET}) +2.0V							1.2	3.6	Nch V _{DS} = 0.05V V _{DD} = 0.7V	0.01	0.05	Nch V _{DS} = 0.5V V _{DD} = 1.5V	1.0	2.0																																																																																																																																			
RN5VD16A/C	1.560	1.600	1.640	0.048	0.080	0.112						V _{DD} = (-V _{DET}) -0.13V												4.5								9.0	V _{DD} = (-V _{DET}) +2.0V							1.2	3.6	Nch V _{DS} = 0.05V V _{DD} = 0.7V	0.01	0.05	Nch V _{DS} = 0.5V V _{DD} = 1.5V	1.0	2.0																																																																																																																											
RN5VD17A/C	1.658	1.700	1.742	0.051	0.085	0.119																		V _{DD} = (-V _{DET}) -0.13V								4.5								9.0	V _{DD} = (-V _{DET}) +2.0V							1.2	3.6	Nch V _{DS} = 0.05V V _{DD} = 0.7V	0.01	0.05	Nch V _{DS} = 0.5V V _{DD} = 1.5V	1.0	2.0																																																																																																																			
RN5VD18A/C	1.755	1.800	1.845	0.054	0.090	0.126																										V _{DD} = (-V _{DET}) -0.13V								4.5								9.0	V _{DD} = (-V _{DET}) +2.0V							1.2	3.6	Nch V _{DS} = 0.05V V _{DD} = 0.7V	0.01	0.05	Nch V _{DS} = 0.5V V _{DD} = 1.5V	1.0	2.0																																																																																																											
RN5VD19A/C	1.853	1.900	1.947	0.057	0.095	0.133																																		V _{DD} = (-V _{DET}) -0.13V								4.5								9.0	V _{DD} = (-V _{DET}) +2.0V							1.2	3.6	Nch V _{DS} = 0.05V V _{DD} = 0.7V	0.01	0.05	Nch V _{DS} = 0.5V V _{DD} = 1.5V	1.0	2.0																																																																																																			
RN5VD20A/C	1.950	2.000	2.050	0.060	0.100	0.140																																										V _{DD} = (-V _{DET}) -0.13V								4.5								9.0	V _{DD} = (-V _{DET}) +2.0V							1.2	3.6	Nch V _{DS} = 0.05V V _{DD} = 0.7V	0.01	0.05	Nch V _{DS} = 0.5V V _{DD} = 1.5V	1.0	2.0																																																																																											
RN5VD21A/C	2.048	2.100	2.152	0.063	0.105	0.147																																																		V _{DD} = (-V _{DET}) -0.13V								4.5								9.0	V _{DD} = (-V _{DET}) +2.0V							1.2	3.6	Nch V _{DS} = 0.05V V _{DD} = 0.7V	0.01	0.05	Nch V _{DS} = 0.5V V _{DD} = 1.5V	1.0	2.0																																																																																			
RN5VD22A/C	2.145	2.200	2.255	0.066	0.110	0.154																																																										V _{DD} = (-V _{DET}) -0.13V								4.5								9.0	V _{DD} = (-V _{DET}) +2.0V							1.2	3.6	Nch V _{DS} = 0.05V V _{DD} = 0.7V	0.01	0.05	Nch V _{DS} = 0.5V V _{DD} = 1.5V	1.0	2.0																																																																											
RN5VD23A/C	2.243	2.300	2.357	0.069	0.115	0.161																																																																		V _{DD} = (-V _{DET}) -0.13V								4.5								9.0	V _{DD} = (-V _{DET}) +2.0V							1.2	3.6	Nch V _{DS} = 0.05V V _{DD} = 0.7V	0.01	0.05	Nch V _{DS} = 0.5V V _{DD} = 1.5V	1.0	2.0																																																																			
RN5VD24A/C	2.340	2.400	2.460	0.072	0.120	0.168																																																																										V _{DD} = (-V _{DET}) -0.13V								4.5								9.0	V _{DD} = (-V _{DET}) +2.0V							1.2	3.6	Nch V _{DS} = 0.05V V _{DD} = 0.7V	0.01	0.05	Nch V _{DS} = 0.5V V _{DD} = 1.5V	1.0	2.0																																																											
RN5VD25A/C	2.438	2.500	2.562	0.075	0.125	0.175																																																																																		V _{DD} = (-V _{DET}) -0.13V								4.5								9.0	V _{DD} = (-V _{DET}) +2.0V							1.2	3.6	Nch V _{DS} = 0.05V V _{DD} = 0.7V	0.01	0.05	Nch V _{DS} = 0.5V V _{DD} = 1.5V	1.0	2.0																																																			
RN5VD26A/C	2.535	2.600	2.665	0.078	0.130	0.182																																																																																										V _{DD} = (-V _{DET}) -0.13V								4.5								9.0	V _{DD} = (-V _{DET}) +2.0V							1.2	3.6	Nch V _{DS} = 0.05V V _{DD} = 0.7V	0.01	0.05	Nch V _{DS} = 0.5V V _{DD} = 1.5V	1.0	2.0																																											
RN5VD27A/C	2.633	2.700	2.767	0.081	0.135	0.189																																																																																																		V _{DD} = (-V _{DET}) -0.13V								4.5								9.0	V _{DD} = (-V _{DET}) +2.0V							1.2	3.6	Nch V _{DS} = 0.05V V _{DD} = 0.7V	0.01	0.05	Nch V _{DS} = 0.5V V _{DD} = 1.5V	1.0	2.0																																			
RN5VD28A/C	2.730	2.800	2.870	0.084	0.140	0.196																																																																																																										V _{DD} = (-V _{DET}) -0.13V								4.5								9.0	V _{DD} = (-V _{DET}) +2.0V							1.2	3.6	Nch V _{DS} = 0.05V V _{DD} = 0.7V	0.01	0.05	Nch V _{DS} = 0.5V V _{DD} = 1.5V	1.0	2.0																											
RN5VD29A/C	2.828	2.900	2.972	0.087	0.145	0.203																																																																																																																		V _{DD} = (-V _{DET}) -0.13V								4.5								9.0	V _{DD} = (-V _{DET}) +2.0V							1.2	3.6	Nch V _{DS} = 0.05V V _{DD} = 0.7V	0.01	0.05	Nch V _{DS} = 0.5V V _{DD} = 1.5V	1.0	2.0																			
RN5VD30A/C	2.925	3.000	3.075	0.090	0.150	0.210	V _{DD} = (-V _{DET}) -0.13V			4.5			9.0	V _{DD} = (-V _{DET}) +2.0V	1.2	3.6																																																																																																																Nch V _{DS} = 0.05V V _{DD} = 0.7V								0.01								0.05	Nch V _{DS} = 0.5V V _{DD} = 1.5V							1.0	2.0																	
RN5VD31A/C	3.023	3.100	3.177	0.093	0.155	0.217				V _{DD} = (-V _{DET}) -0.13V			4.5		9.0	V _{DD} = (-V _{DET}) +2.0V																																																																																																																																										1.2	3.6	Nch V _{DS} = 0.05V V _{DD} = 0.7V	0.01	0.05	Nch V _{DS} = 0.5V V _{DD} = 1.5V	1.0	2.0									
RN5VD32A/C	3.120	3.200	3.280	0.096	0.160	0.224					V _{DD} = (-V _{DET}) -0.13V		4.5		9.0			V _{DD} = (-V _{DET}) +2.0V	1.2	3.6	Nch V _{DS} = 0.05V V _{DD} = 0.7V	0.01	0.05																																																																																																																																			Nch V _{DS} = 0.5V V _{DD} = 1.5V	1.0							2.0								
RN5VD33A/C	3.218	3.300	3.382	0.099	0.165	0.231							V _{DD} = (-V _{DET}) -0.13V		4.5				9.0	V _{DD} = (-V _{DET}) +2.0V																																																																																																																																															1.2	3.6	Nch V _{DS} = 0.05V V _{DD} = 0.7V	0.01	0.05	Nch V _{DS} = 0.5V V _{DD} = 1.5V	1.0	2.0
RN5VD34A/C	3.315	3.400	3.485	0.102	0.170	0.238		V _{DD} = (-V _{DET}) -0.13V							4.5		9.0		V _{DD} = (-V _{DET}) +2.0V							1.2	3.6	Nch V _{DS} = 0.05V V _{DD} = 0.7V	0.01	0.05	Nch V _{DS} = 0.5V V _{DD} = 1.5V																																																																																																																																				1.0	2.0						
RN5VD35A/C	3.413	3.500	3.587	0.105	0.175	0.245									V _{DD} = (-V _{DET}) -0.13V		4.5									9.0	V _{DD} = (-V _{DET}) +2.0V																																																																																																																																															
RN5VD36A/C	3.510	3.600	3.690	0.108	0.180	0.252			V _{DD} = (-V _{DET}) -0.13V								4.5								9.0	V _{DD} = (-V _{DET}) +2.0V								1.2	3.6	Nch V _{DS} = 0.05V V _{DD} = 0.7V	0.01	0.05	Nch V _{DS} = 0.5V V _{DD} = 1.5V																																																																																																																																			
RN5VD37A/C	3.608	3.700	3.792	0.111	0.185	0.259						V _{DD} = (-V _{DET}) -0.13V					4.5								9.0								V _{DD} = (-V _{DET}) +2.0V	1.2	3.6							Nch V _{DS} = 0.05V V _{DD} = 0.7V	0.01	0.05	Nch V _{DS} = 0.5V V _{DD} = 1.5V	1.0	2.0																																																																																																																											
RN5VD38A/C	3.705	3.800	3.895	0.114	0.190	0.266											V _{DD} = (-V _{DET}) -0.13V							4.5	9.0									V _{DD} = (-V _{DET}) +2.0V	1.2						3.6									Nch V _{DS} = 0.05V V _{DD} = 0.7V	0.01	0.05	Nch V _{DS} = 0.5V V _{DD} = 1.5V	1.0	2.0																																																																																																																			
RN5VD39A/C	3.803	3.900	3.997	0.117	0.195	0.273																		V _{DD} = (-V _{DET}) -0.13V	4.5							9.0			V _{DD} = (-V _{DET}) +2.0V						1.2								3.6									Nch V _{DS} = 0.05V V _{DD} = 0.7V	0.01	0.05	Nch V _{DS} = 0.5V V _{DD} = 1.5V	1.0	2.0																																																																																																											

(Note) Refer to the previously defined "Minimum Operating Voltage".

Condition 1 : T_{opt}=25°CCondition 2 : -30°C≤T_{opt}≤85°C

T_{opt}=25°C

Output Current 3			Minimum Oper- ating Voltage		C _D Pin Threshold Voltage				C _D Pin Output Current 1			C _D Pin Output Current 2			Delay Resistance			Detector Threshold Tempco.		
I _{OUT3} (mA)			V _{DDL} (V)		V _{TCD} (V)				I _{CD1} (μA)			I _{CD2} (μA)			R _D (MΩ)			$\frac{\Delta-V_{DET}}{\Delta T_{opt}}$ (ppm/°C)		
condi- tions	MIN.	TYP.	TYP.	MAX.	condi- tions	MIN.	TYP.	MAX.	condi- tions	MIN.	TYP.	conditions	MIN.	TYP.	MIN.	TYP.	MAX.	condi- tions	TYP.	
P _{ch} V _{DS} = -2.1V V _{DD} = 4.5V	1.0	2.0	(Note1) Condition1 0.55 Condition2 0.65	(Note1) Condition1 0.70 Condition2 0.80	conditions V _{DD} = (-V _{DET}) × 1.1V	V _{DD} × 0.3	V _{DD} × 0.5	V _{DD} × 0.7	V _{DS} = 0.1V V _{DD} = 0.7V	2.0	30	V _{DS} = 0.5V V _{DD} = 1.5V	V _{DD} = 0.85V	10	100	0.5	1.0	2.0	-30°C≤ T _{opt} ≤85°C	±100
													V _{DD} = 1.0V	50	200					
						V _{DD} × 0.35	V _{DD} × 0.5	V _{DD} × 0.65												
						V _{DD} × 0.4	V _{DD} × 0.5	V _{DD} × 0.6												

RN5VD

• RN5VD40A/C to RN5VD60A/C

Part Number.	Detector Threshold			Hysteresis			Supply Current 1			Supply Current 2			Output Current 1			Output Current 2					
	-V _{DET} (V)			V _{HYS} (V)			I _{SS1} (μA)			I _{SS2} (μA)			I _{OUT1} (mA)			I _{OUT2} (mA)					
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	conditions	TYP.	MAX.	conditions	TYP.	MAX.	conditions	MIN.	TYP.	conditions	MIN.	TYP.			
RN5VD40A/C	3.900	4.000	4.100	0.120	0.200	0.280	V _{DD} = (-V _{DET}) -0.16V	5.0	10.0	V _{DD} = (-V _{DET}) +2.0V	1.3	3.9	N _{ch} V _{DS} = 0.05V V _{DD} = 0.7V	0.01	0.05	N _{ch} V _{DS} = 0.5V V _{DD} = 1.5V	1.0	2.0			
RN5VD41A/C	3.998	4.100	4.202	0.123	0.205	0.287															
RN5VD42A/C	4.095	4.200	4.305	0.126	0.210	0.294															
RN5VD43A/C	4.193	4.300	4.407	0.129	0.215	0.301		5.5	11.0		1.4	4.2									
RN5VD44A/C	4.290	4.400	4.510	0.132	0.220	0.308															
RN5VD45A/C	4.388	4.500	4.612	0.135	0.225	0.315															
RN5VD46A/C	4.485	4.600	4.715	0.138	0.230	0.322		V _{DD} = (-V _{DET}) -0.20V	6.0										12.0	6.5	13.0
RN5VD47A/C	4.583	4.700	4.817	0.141	0.235	0.329															
RN5VD48A/C	4.680	4.800	4.920	0.144	0.240	0.336															
RN5VD49A/C	4.778	4.900	5.022	0.147	0.245	0.343	6.5		13.0												
RN5VD50A/C	4.875	5.000	5.125	0.150	0.250	0.350															
RN5VD51A/C	4.973	5.100	5.227	0.153	0.255	0.357															
RN5VD52A/C	5.070	5.200	5.330	0.156	0.260	0.364															
RN5VD53A/C	5.168	5.300	5.432	0.159	0.265	0.371															
RN5VD54A/C	5.265	5.400	5.535	0.162	0.270	0.378															
RN5VD55A/C	5.363	5.500	5.637	0.165	0.275	0.385															
RN5VD56A/C	5.460	5.600	5.740	0.168	0.280	0.392															
RN5VD57A/C	5.558	5.700	5.842	0.171	0.285	0.399															
RN5VD58A/C	5.655	5.800	5.945	0.174	0.290	0.406															
RN5VD59A/C	5.753	5.900	6.047	0.177	0.295	0.413															
RN5VD60A/C	5.850	6.000	6.150	0.180	0.300	0.420															

(Note) Refer to the previously defined "Minimum Operating Voltage".

Condition 1 : T_{opt}=25°C

Condition 2 : -30°C≤T_{opt}≤85°C

T_{opt}=25°C

Output Current 3			Minimum Operating Voltage		C _D Pin Threshold Voltage				C _D Pin Output Current 1			C _D Pin Output Current 2			Delay Resistance			Detector Threshold Tempco.	
I _{OUT3} (mA)			V _{DDL} (V)		V _{TCD} (V)				I _{CD1} (μA)			I _{OUT1} (mA)			I _{OUT2} (mA)			$\frac{\Delta-V_{DET}}{\Delta T_{opt}}$ (ppm/°C)	
conditions	MIN.	TYP.	TYP.	MAX.	conditions	MIN.	TYP.	MAX.	conditions	MIN.	TYP.	conditions	MIN.	TYP.	conditions	TYP.	MAX.	conditions	TYP.
P _{ch} V _{DS} = -2.1V V _{DD} = 8.0V	1.5	3.0	(Note1) Condition1 0.55 Condition2 0.65	(Note1) Condition1 0.70 Condition2 0.80	V _{DD} = (-V _{DET}) ×1.1V	V _{DD} × 0.4	V _{DD} × 0.5	V _{DD} × 0.6V	V _{DS} = 0.1V V _{DD} = 0.7V	2.0	30	V _{DS} = 0.5V	V _{DD} = 1.5V	200	800	0.5	1.0	2.0	-30°C ≤ T _{opt} ≤85°C ±100

OPERATION

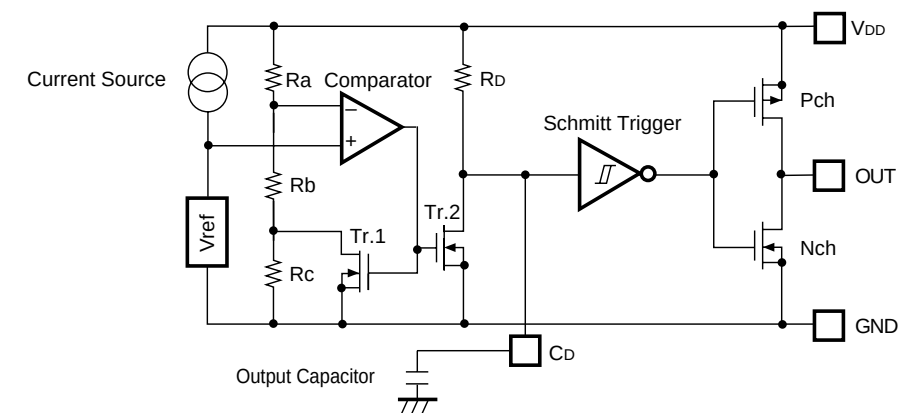


FIG. 1 Block Diagram

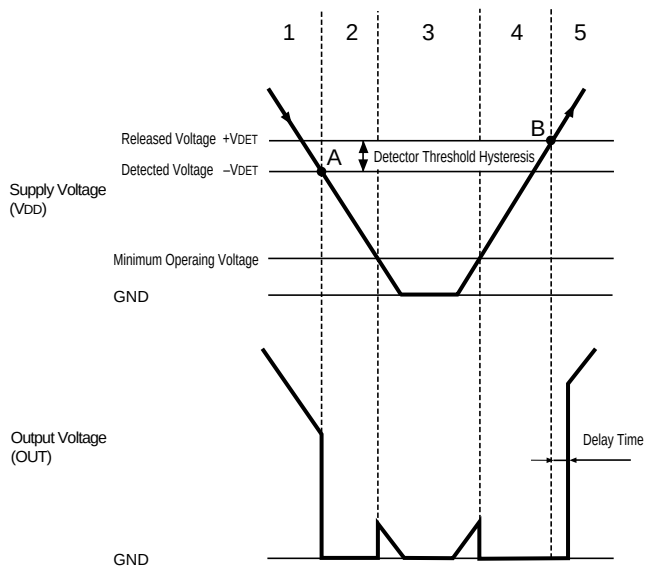


FIG. 2 Operation Diagram

Step		Step 1	Step 2	Step 3	Step 4	Step 5
Comparator (–) Pin Input Voltage		I	II	II	II	I
Comparator Output		L	H	Indefinite	H	L
Tr. 1, 2		OFF	ON	Indefinite	ON	OFF
Output Tr.	Nch	OFF	ON	Indefinite	ON	OFF
	Pch	ON	OFF	Indefinite	OFF	ON

I. $\frac{R_b + R_c}{R_a + R_b + R_c} \cdot V_{DD}$

II. $\frac{R_b}{R_a + R_b} \cdot V_{DD}$

- Step 1.

Output Voltage is equal to Pull-up Voltage.
- Step 2.


When Input Voltage (V_{DD}) reaches the state of $V_{ref} \geq V_{DD} \cdot (R_b + R_c) / (R_a + R_b + R_c)$ at Point A (Detected Voltage $-V_{DET}$), the output of Comparator is reversed, so that Output Voltage becomes GND. Discharging is performed from C_D pin connected to External Capacitor. No delay time is generated.
- Step 3.

Output Voltage becomes indefinite when Power Source Voltage (V_{DD}) is smaller than Minimum Operating Voltage. When the output is pulled up, V_{DD} is output.
- Step 4.

Output Voltage becomes equal to GND.
- Step 5.

When Input Voltage (V_{DD}) reaches the state of $V_{ref} \leq V_{DD} \cdot R_b / (R_a + R_b)$ at Point B (Released Voltage $+V_{DET}$), the output of Comparator is reversed, and the External Capacitor is charged through C_D pin, so that Output Voltage becomes equal to Pulled-up Voltage after a delay time $t_D (=0.69 \times 10^6 \times C_D)$.

• Output Delay Operation

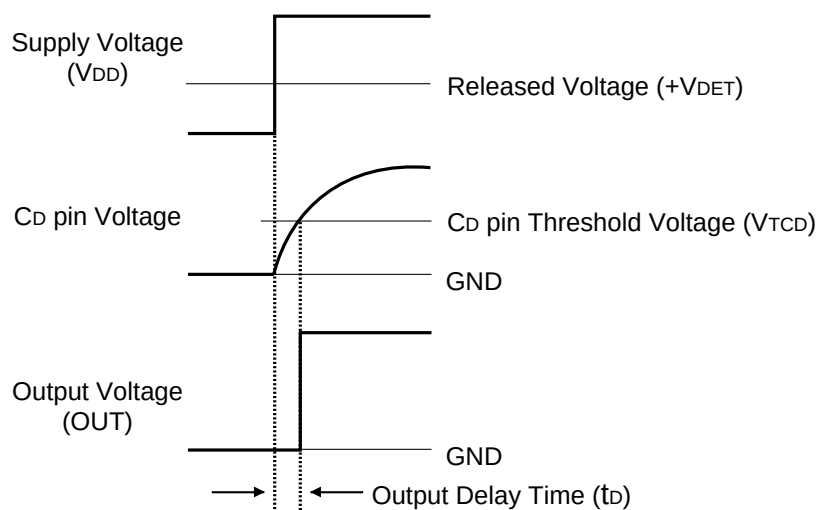

When the Supply Voltage crosses the Released Voltage ($+V_{DET}$) from a low value to a value higher than the Released Voltage ($+V_{DET}$), the C_D pin Voltage starts to increase (starts to charge the external capacitor).

The Output Voltage is maintained at "L" level until the C_D pin Voltage reaches to V_{TCD} (C_D pin Threshold Voltage) after that the Output Voltage is reversed to "H" state.

The time period from beginning of charging capacitor to Output Voltage reversing represents the Output Delay (t_D).

• Output Delay Time

Delay time (t_D) can be set accordance with the capacitance C_D of external capacitor as below

$$t_D = 0.69 \times 10^6 \times C_D \text{ (s)}$$

TEST CIRCUITS




FIG. 3 Supply Current test Circuit

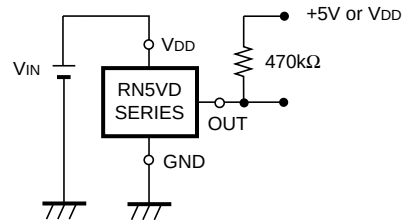


FIG. 4 Detector Threshold Test Circuit




FIG. 5 Nch Driver Output Current Test Circuit

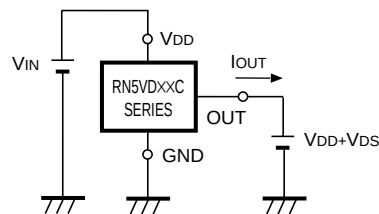


FIG. 6 Pch Driver Output Current Test Circuit

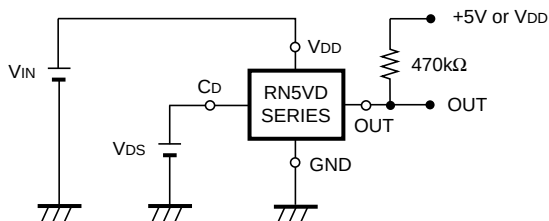


FIG. 7 CD pin Threshold Voltage Test Circuit

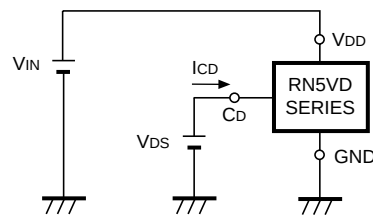


FIG. 8 CD pin Sink Current Test Circuit





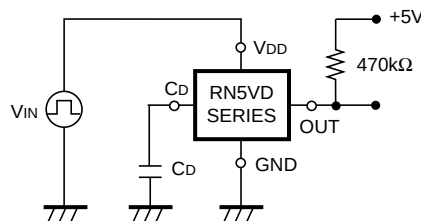


FIG. 9 Output Delay Time Test Circuit



*) at FIG.4,7,9. CMOS Output Type does not need a pull-up resistor.


TYPICAL CHARACTERISTICS

1) Supply Current vs. Input Voltage

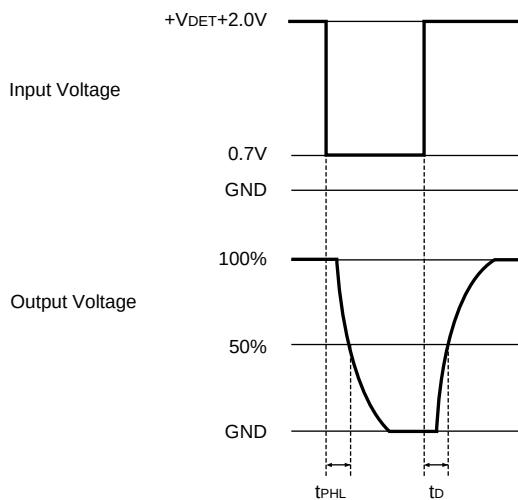
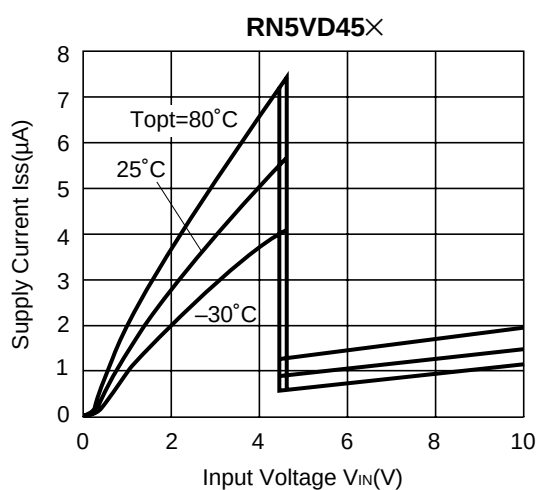
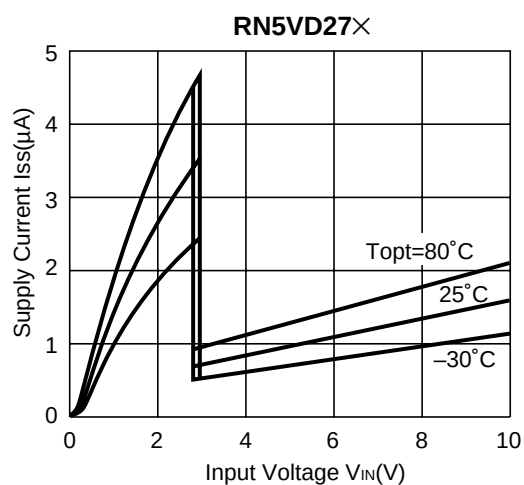
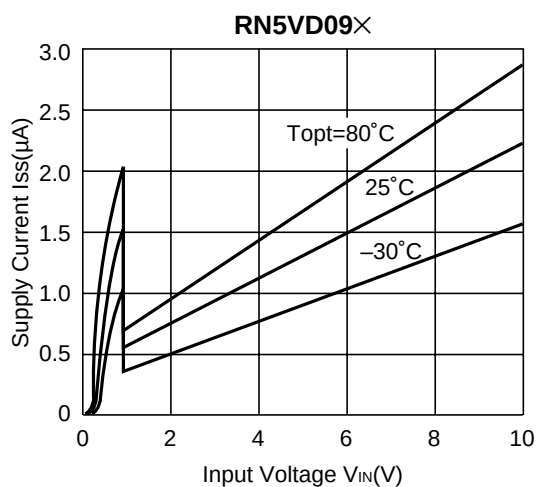




2) Detector Threshold vs. Temperature

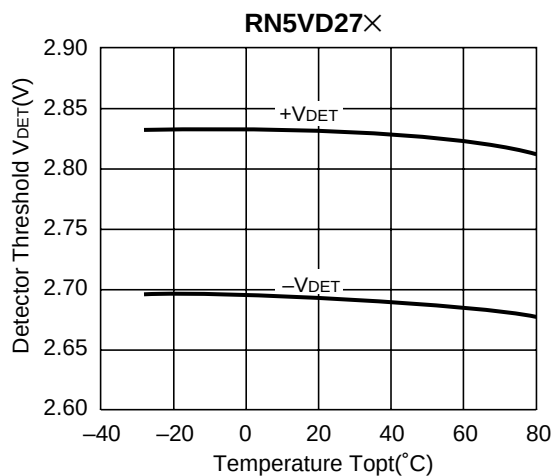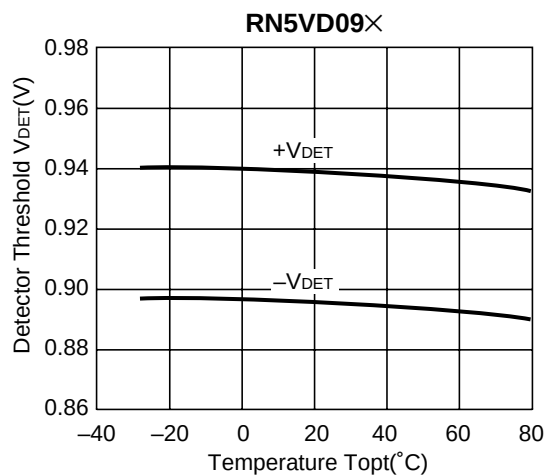



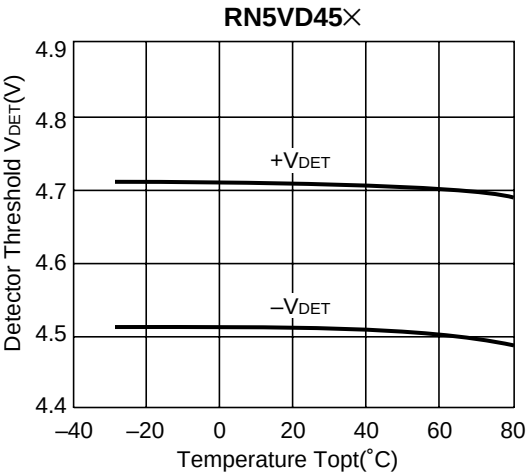







3) Output Voltage vs. Input Voltage

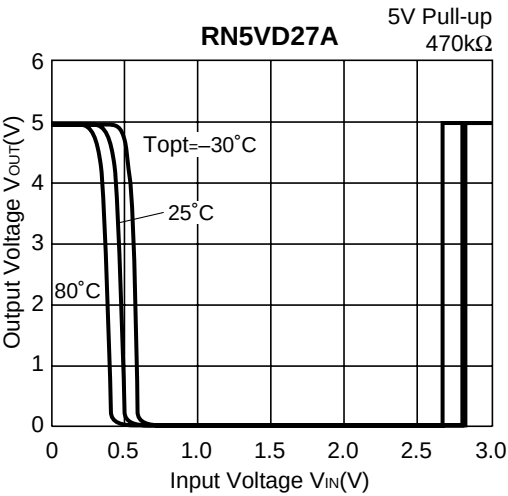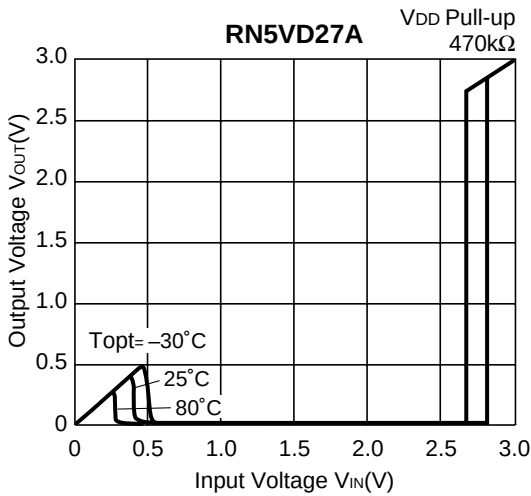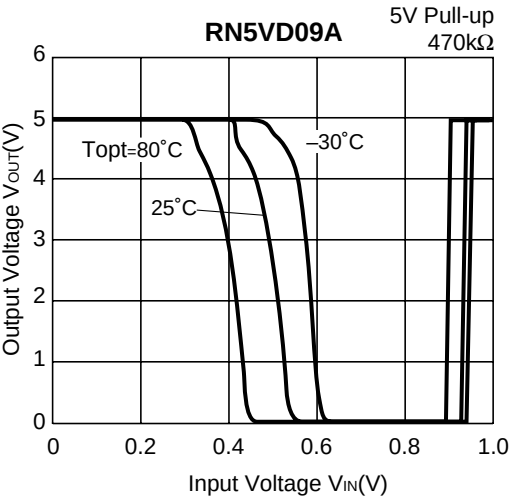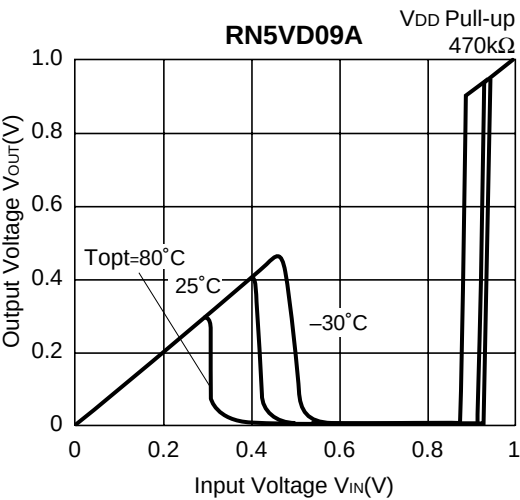


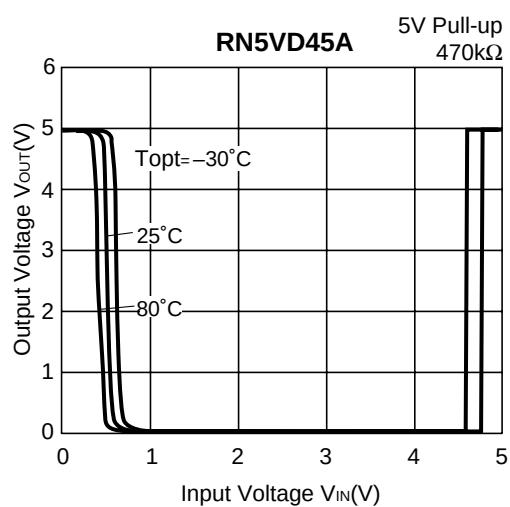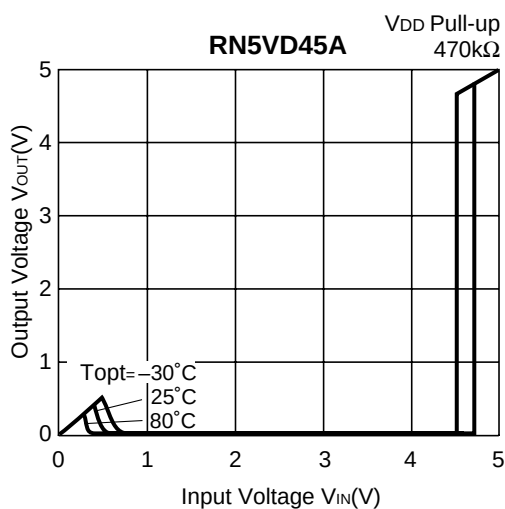




4) Nch Driver Output Current vs. V_{DS}



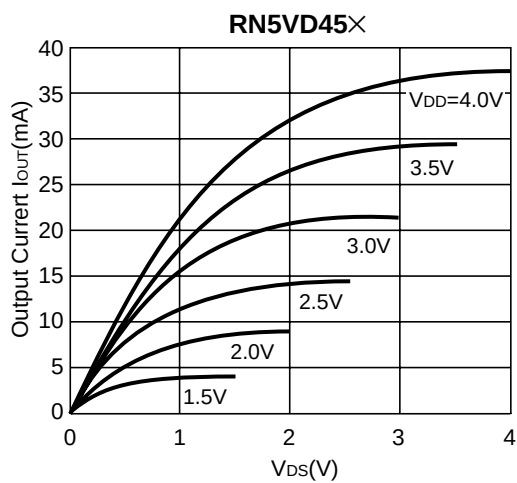
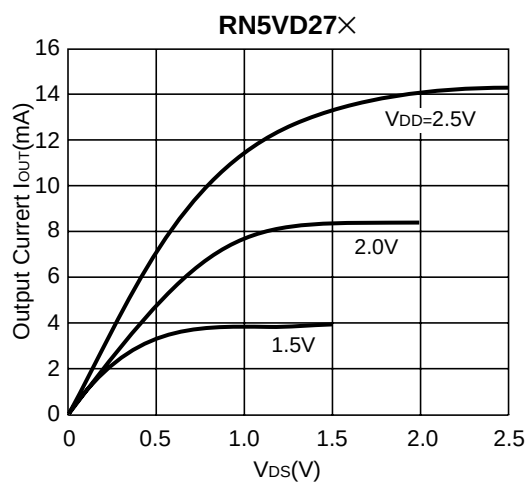
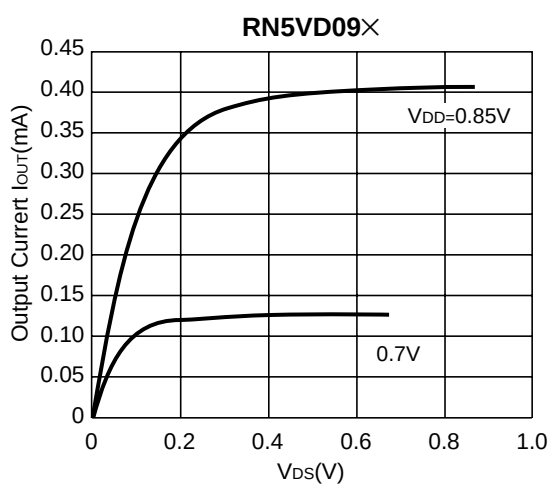


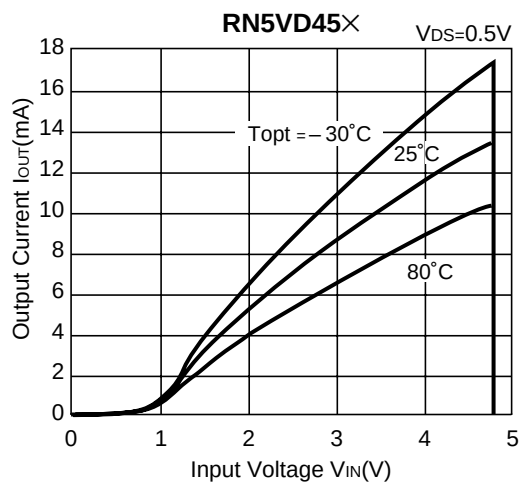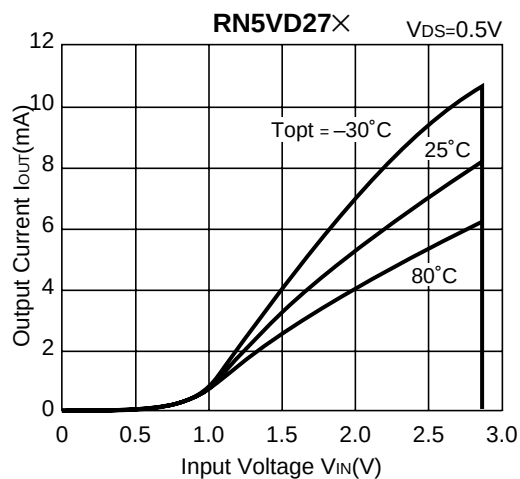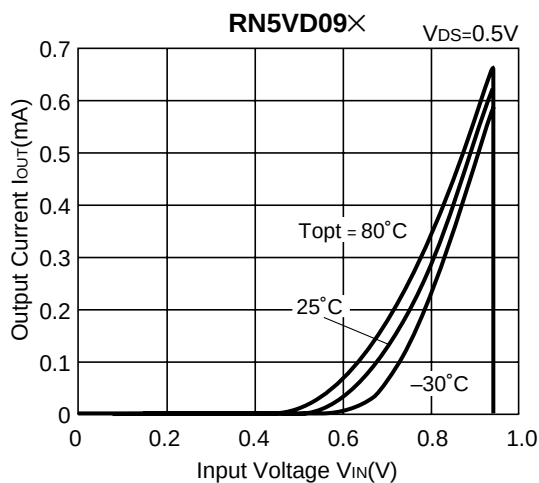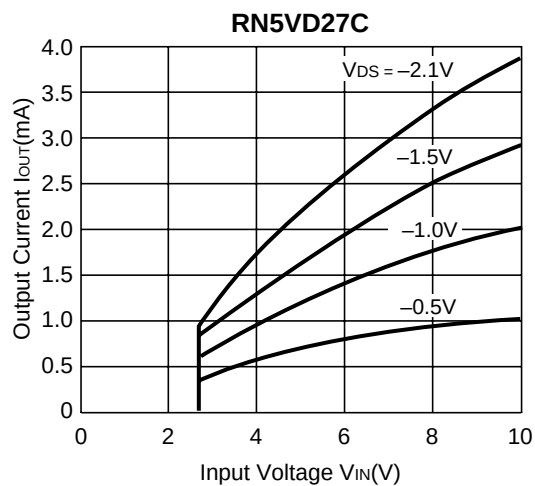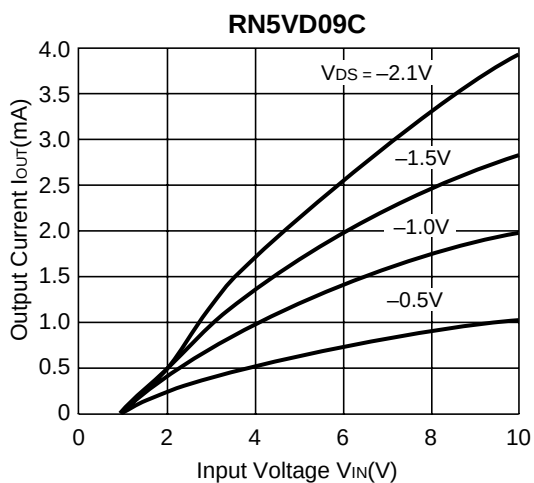
5) Nch Driver Output Current vs. Input Voltage

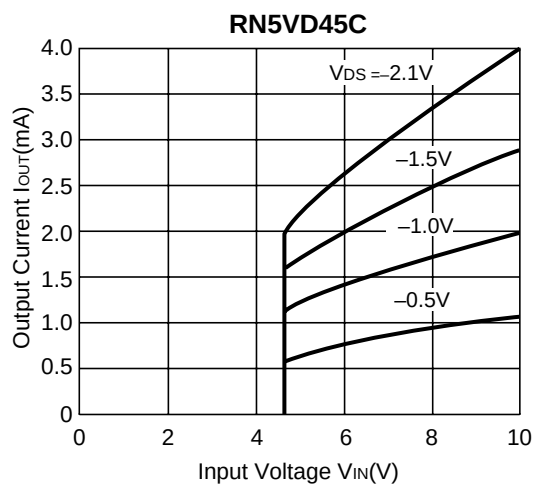6) Pch Driver Output Current vs. Input Voltage

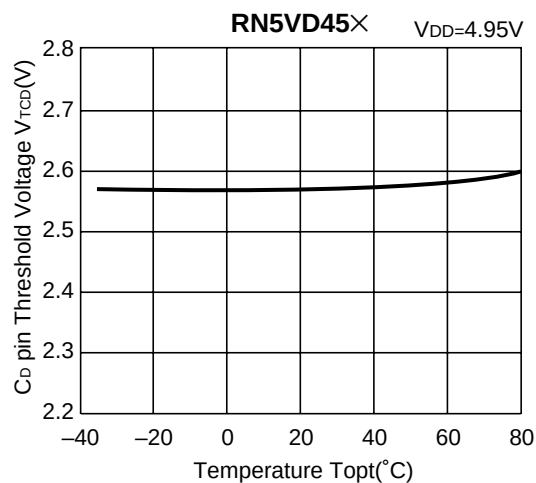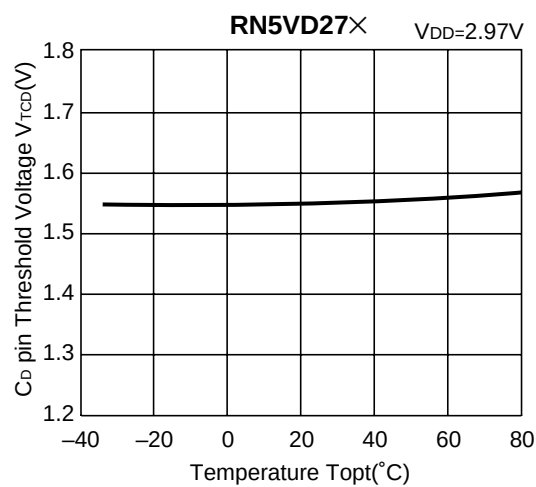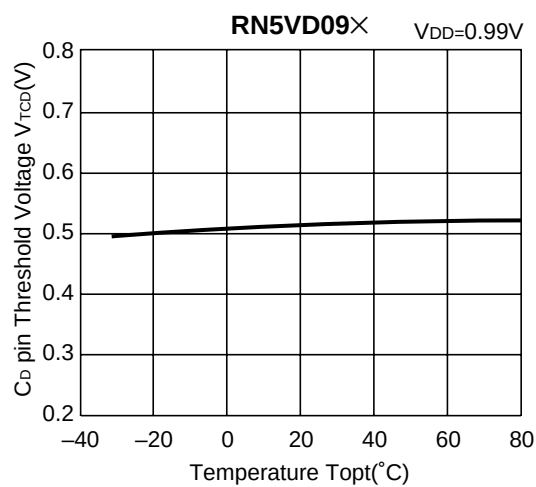


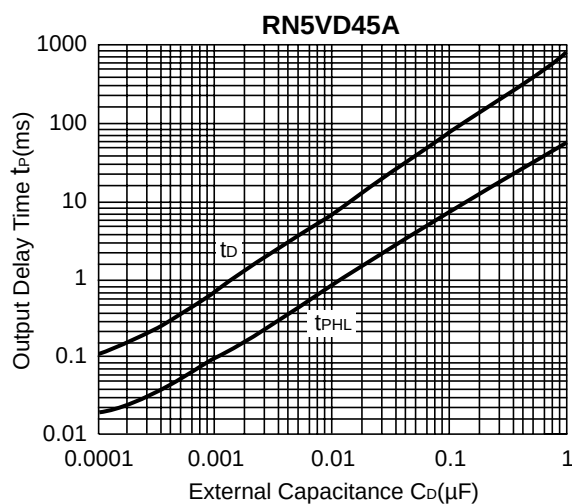
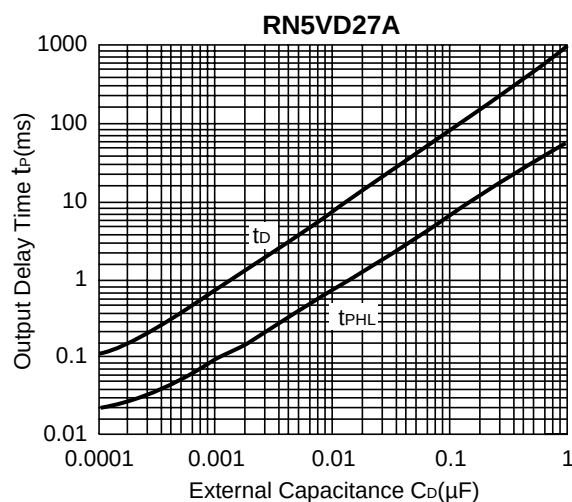
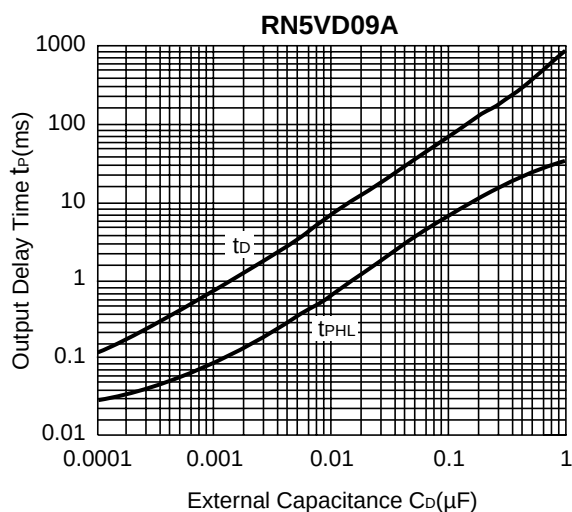
7) Cd pin Threshold Voltage vs. Temperature

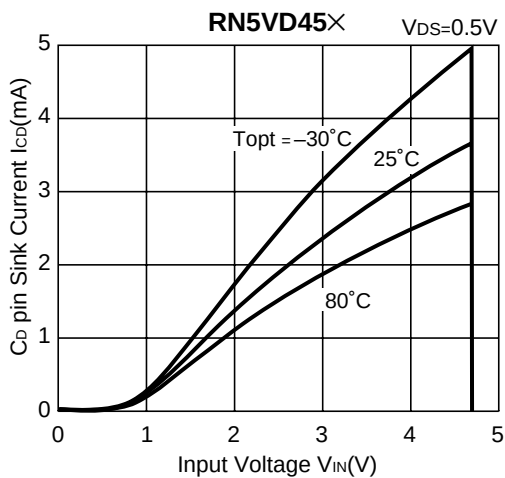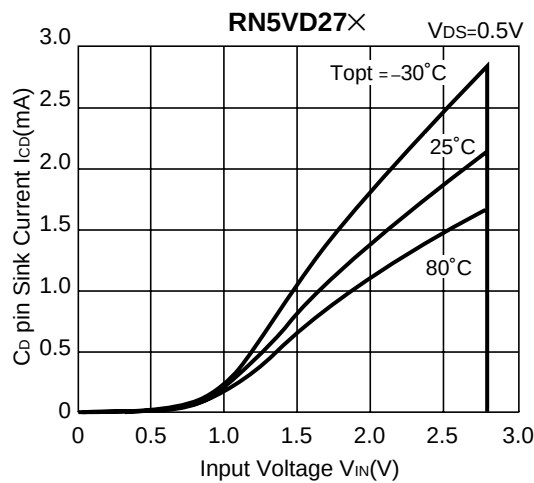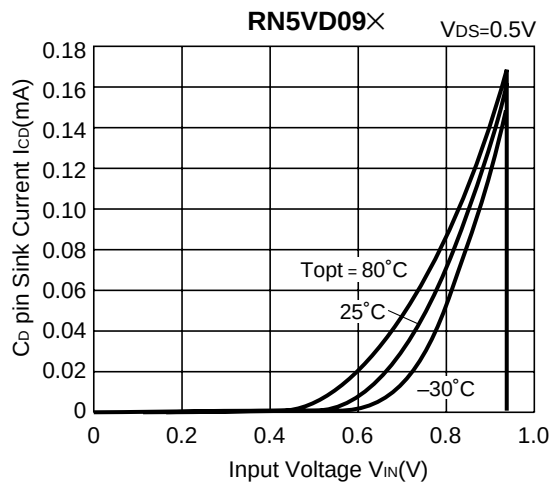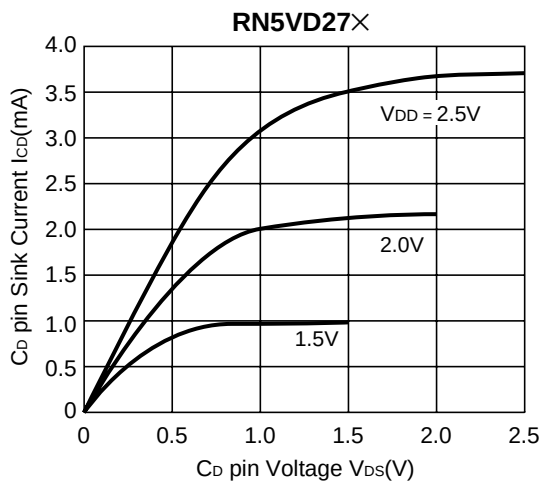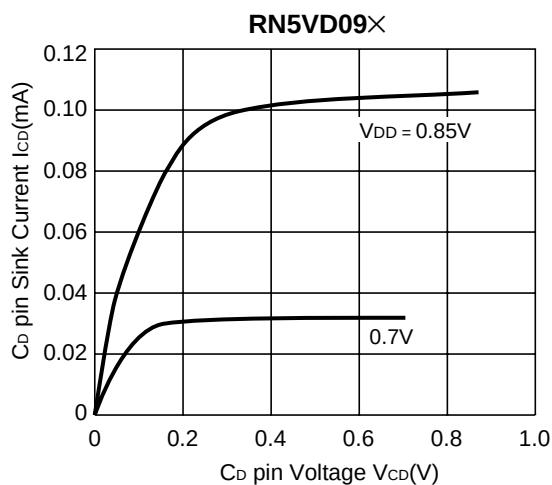

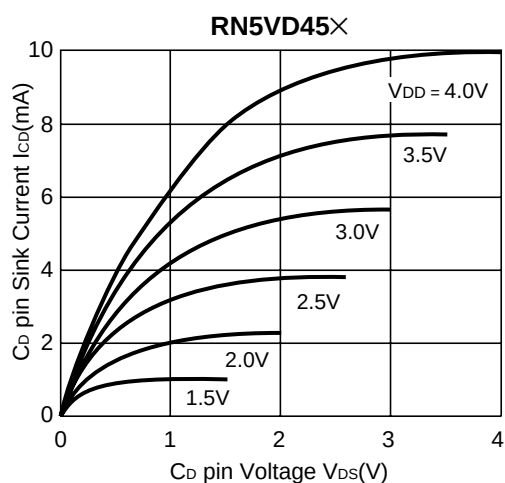
8) Cd pin Sink Current vs. Input Voltage

9) Cd pin Sink Current vs. Cd pin Voltage




10) Output delay Time vs. External Capacitance

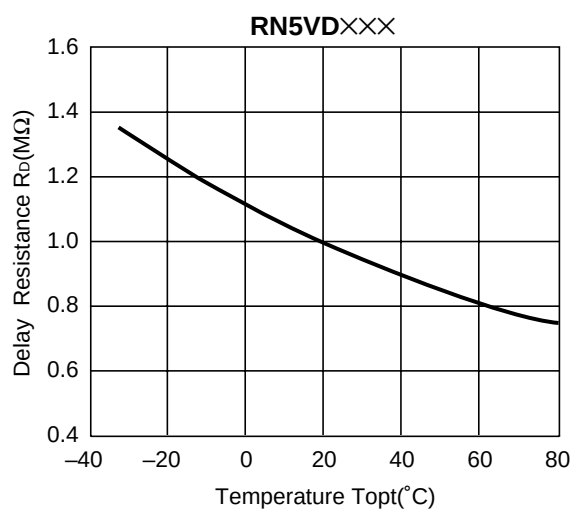


11) Delay Resistance vs. Temperature




TYPICAL APPLICATIONS

• **RN5VD××A CPU Reset Circuit (Nch Open Drain Output)**


(1) Input Voltage to RN5VD××A is the same as the input voltage to CPU.

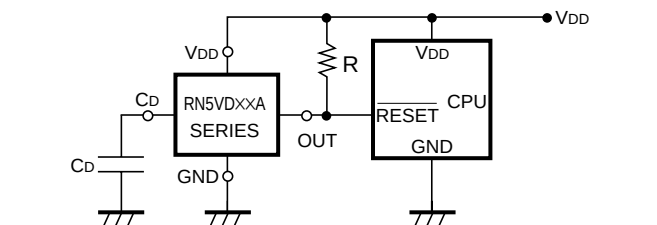


(2) Input Voltage to RN5VD××A is different from the input voltage to CPU.

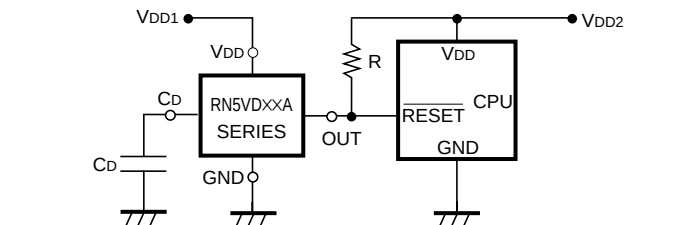



• **RN5VD××C CPU Reset Circuit (CMOS Output)**

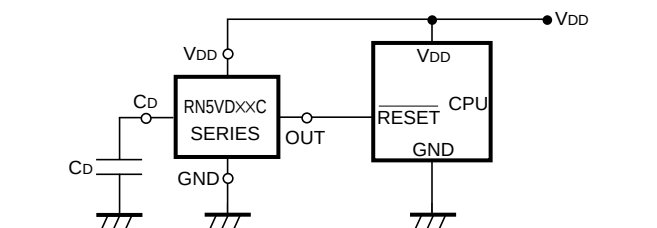

- **Memory Back-up Circuit**

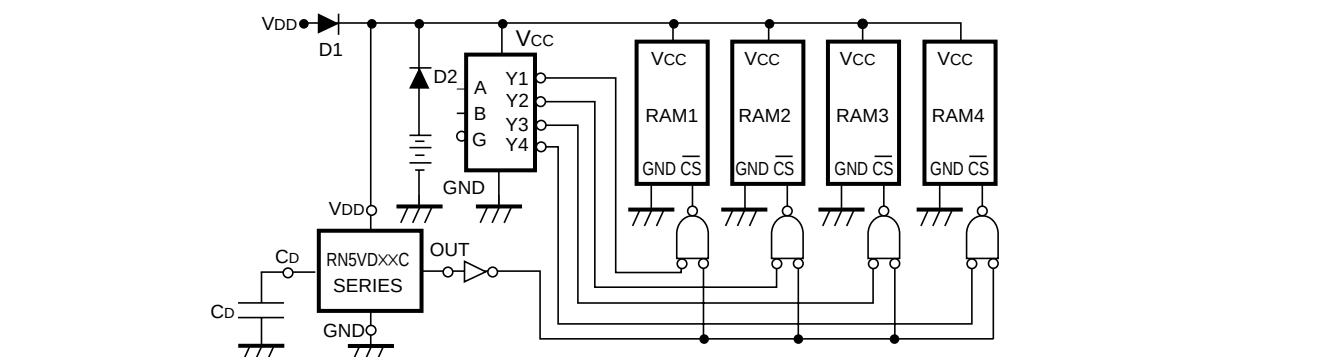

Manual Reset Circuit



APPLICATION HINTS




FIG.10




FIG.11

1. When RN5VDxC (CMOS Output) is used in FIG.10, this IC may oscillate by the through-type current at the detection when impedance is connected between Power Source VDD and RN5VD VDD Pin. When RN5VDxA (Nch Open Drain Output) is used in FIG.10, and R becomes excessively large, Detector Threshold may be varied because of the voltage drop of the supply current in the IC itself.
2. The connection as shown in FIG. 11 may cause the oscillation in both RN5VDxC (CMOS Output) and RN5VDxA (Nch Open Drain Output)



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331