

TACT Switch™ 5.9×2.87mm Sidepush™ Double Action (Surface Mount Type) SKSE Series



Mid-mount solution of 1.1mm switch height from PCB.

NEW




Product Line

Product No.	Operating force	Operating direction	Travel (mm)	Rating (max.)	Rating (min.)	Operating life (5mA 5V DC)	Initial contact resistance	Minimum order unit (pcs.)
SKSELAE010	1st 0.8N 2nd 1.8N	Horizontal	1st 0.15 All 0.25	50mA 12V DC	10μA 1V DC	100,000cycles	500mΩ max.	3,400

Specification of Embossed Taping Package (Taping Packaging for Auto-insertion)

Reel Size

Unit:mm

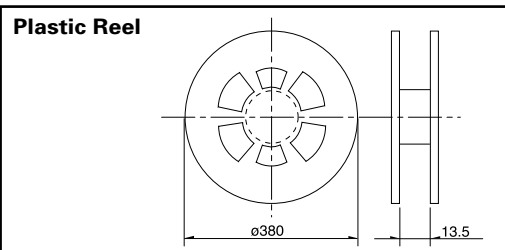

Number of packages (pcs.)			Tape width (mm)
1 reel	1 case /Japan	1 case /export packing	
3,400	34,000	34,000	12

Dimensions

Unit:mm

Style	PC board mounting hole and land dimensions (Viewed from switch mounting face)

Circuit Arrangement

Switch circuit configuration	{1st action}	{2nd action}

Note

- Please place purchase orders for taping products per minimum order unit (1 reel or a case).
- For $\phi 330$ mm diameter reel requirements, please contact us.

Refer to P.306 for soldering conditions.

List of Varieties

Sharp Feeling Type

Series			SKSD	SKRN	SKSE	SPEE	SKRK	SKRP	SKQM	SKQY	SKRA	SKHM	SKHU
Photo													
Type			Surface mount										
Features			Double action		Horizontal type Double action		Compact size Low-profile	High operation force Compact size	Compact size		Middle stroke	—	Dust-proof type is available
Operating direction	Vertical		●	●	—		●	●	●	●	●	●	●
	Horizontal		—		●	●	—						
Dimensions (mm)		W	4.1	□6	5.9	4	3.9	4.2	6	6.1	□6.2	6.2	
		D	3.9		2.87	5	2.9	3.2	3.5	3.7		6.5	
		H	0.6	0.9	3	1.22	1.5	2.5	4.3	2.5	3.4	3.1	2.5
Operation force coverage		1N	See the relevant pages for respective product descriptions				↕	↕	↕	↕	↕	↕	↕
		5N											
Ground terminal			●	●	●	—				●	—	●	●
Operating temperature range			-30°C to +85°C			-10°C to +60°C	-30°C to +85°C						
Electrical performance	Insulation resistance		100MΩ min. 100V DC			10MΩ min. 100V DC	100MΩ min. 100V DC						
	Voltage proof		250V AC for 1min. SKSD/SE : 100V AC for 1min.			100V AC for 1min.	250V AC for 1min.						
Durability	Vibration		10 to 55 to 10Hz/min., the amplitude is 1.5mm for all the frequencies, in the 3 direction of X, Y and Z for 2hours respectively										
	Lifetime		Shall be in accordance with individual specifications.										
Environmental performance	Cold		-30±2°C for 96h			-40±2°C for 96h	-30±2°C for 96h						
	Dry heat		80±2°C for 96h			85±2°C for 96h	80±2°C for 96h						
	Damp heat		60±2°C, 90 to 95%RH for 96h			40±2°C, 90 to 95%RH for 96h	60±2°C, 90 to 95%RH for 96h						
Page			278	279	280	84	281	282	283	284	285	286	287

W : Width. The most outer dimension excluding terminal portion.
D : Depth. The most outer dimension excluding terminal portion.
H : Height. The minimum dimension if there are variances.

- TACT Switch™ Soldering Conditions306
- TACT Switch™ Cautions307
- Product Line of Knob for TACT Switch™.....308

Note

The automotive operating temperature range to be individually discussed upon request.

Detector

Push

Slide

Rotary

Encoders

Power

Dual-in-line
Package Type

TACT Switch™


Custom-
ProductsSharp
FeelingSoft
FeelingSnap-in
TypeSurface
Mount TypeRadial
Type

Soldering Conditions

Condition for Reflow

Available for Surface Mount Type.

- 1. Heating method: Double heating method with infrared heater.
- 2. Temperature measurement: Thermocouple 0.1 to 0.2φ CA (K) or CC (T) at solder joints (copper foil surface). A heat resistive tape should be used to fix thermocouple.
- 3. Temperature profile

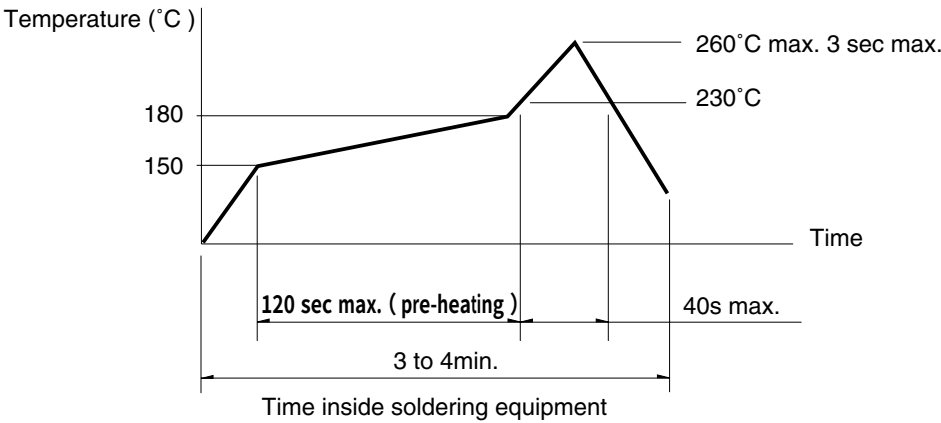

Note

- 1. The above temperature shall be measured on the mounting surface of a PC board. There are cases where the PC board's temperature greatly differs from that of the switch, depending on the material, size, thickness of PC boards and others. The above-stated conditions shall also apply to switch surface temperatures.
- 2. Soldering conditions differ depending on reflow soldering machines. Prior verification of soldering condition is highly recommended.

Conditions for Auto-dip

Available for Snap-in Type and Radial Type
(Except SKHJ, SKHL, SKQJ, SKQK, SKEG series)

Items	Condition
Flux built-up	Mounting surface should not be exposed to flux
Preheating temperature	Ambient temperature of the soldered surface of PC board. 100°C max.
Preheating time	60s max.
Soldering temperature	260°C max.
Duration of immersion	5s max.
Number of soldering	2times max.

Manual Soldering (Except SKRT Series)

Items	Condition
Soldering temperature	350°Cmax.
Duration of soldering	3s max.
Capacity of soldering iron	60W max.

Notes

- 1. Consult with us for availability of TACT Switch™ washing.
- 2. Prevent flux penetration from the top side of the TACT Switch™.
- 3. Switch terminals and a PC board should not be coated with flux prior to soldering.
- 4. The second soldering should be done after the switch is stable with normal temperature.
- 5. Use the flux with a specific gravity of min 0.81.
(EC-19S-8 by TAMURA Corporation, or equivalents.)



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331